

千兆单模双纤收发器

全新模块 | SC接口 | 时效高芯 | 外置电源

全新正品



产品参数

PRODUCT PARAMETER



产品型号: HTB-GS-03
产品名称: 千兆双纤单模收发器
光纤接口: SC, RJ45
发射波长: 1310nm
光口速率: 1.25G
电口速率: 10/100/1000M
传输距离: 20公里
产品尺寸: 95*70*25mm
电源规格: AC 90-265V DC5V1A/2A
电源线长度: $\approx 1.2\text{m}$
电源内直径: $\approx 2.5\text{cm}$

尺寸仅供参考, 请以实物为准

适用性强 用途广泛

适用于电信、铁路、视频监控、航空、新能源、有线电视等各个领域



电信



铁路



视频监控



航空



新能源




有线电视

时效高芯 大容量缓存

具有分配解码处理能力，识别能力强，低延迟传输，稳定可靠，能使设备得到更好的性能。

Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.
Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.
Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.

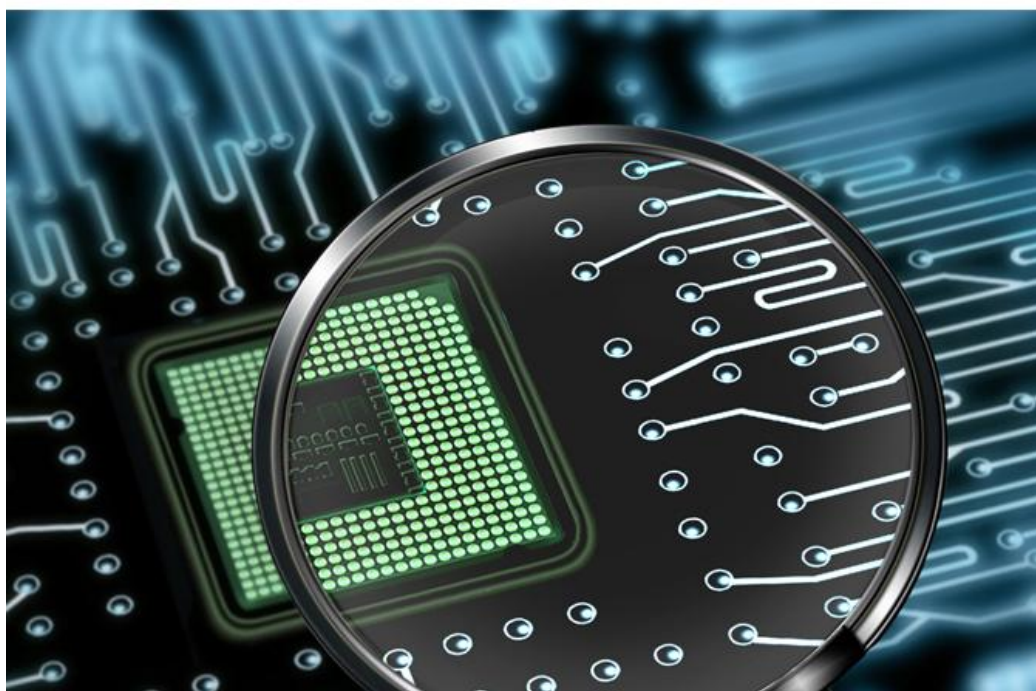

似光速传输 畅通无阻

采用多层结构电路板，工作稳定，数据传输平稳，抑制干扰能力强。

Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.
Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.
Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.




全新光模块 不卡顿

采用优质的光电一体化模块，提供良好的光特性和电特征，保证数据传输可靠工作灵敏度高，光衰少。

Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.
Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.
Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.

光功率-3db~-14db 灵敏度≤36db

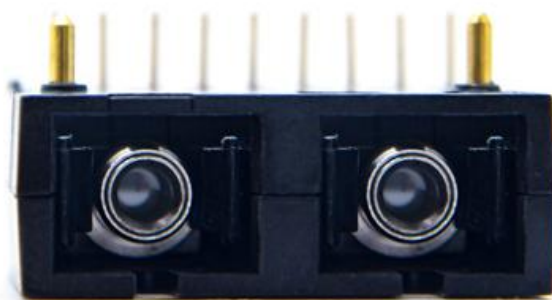

远距离传输 稳定可靠

在数据传输上打破了以太网电缆的百米局限性

Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.
Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.
Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.



全双工、半双工 转换自如

收发器可在全双工与半双工之间转换，数据即可以同时接收和发送
又可以单一发送或单一接收，为您的工作与生活提供更多便利。

Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.
Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.
Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.



双纤接口SC 配对适用

采用两根光纤，分别标明TX,RX,一个发送，一个接收，实现电信号转换为光信号之间的转换。

Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.
Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.
Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.



原装标配 5V1A/2A电源

电源适配器全长1.2米，稳定输入电源保护，耐高温，耐磨损，寿命更长。

Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.
Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.
Using high-performance machine core, cache, to ensure the stability of the photoelectric signal transmission.



产品包装

PRODUCT FITTING

