
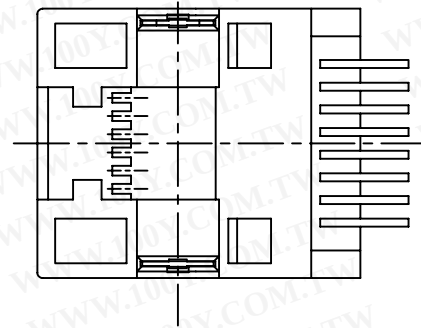
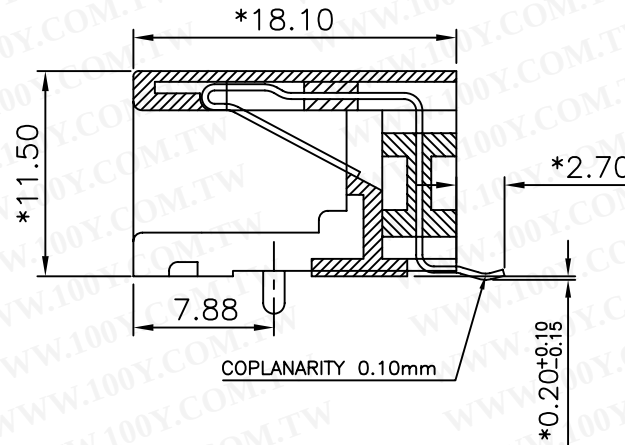
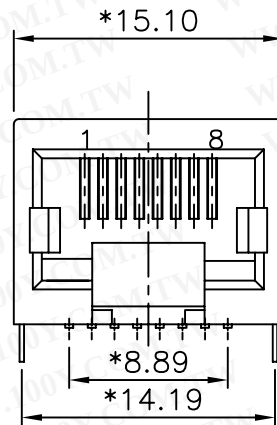


RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

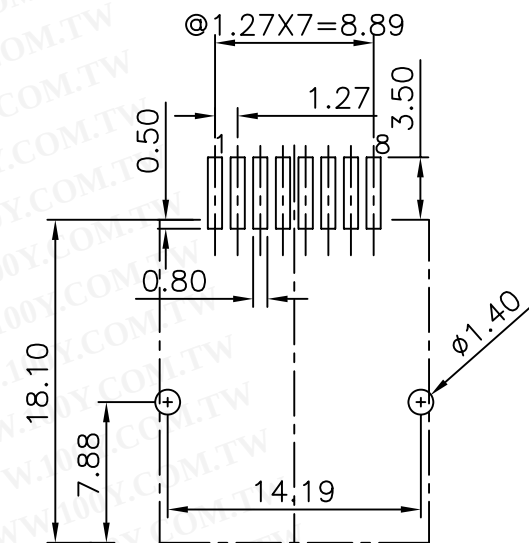

PC BOARD LAYOUT COMPONENT SIDE SHOWN

NOTES:**ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : HIGH TEMP. UL94V-0 BK.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
 2. OPERATION: -40°C TO +85°C.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

UL FILE NO.: E306994

PART NUMBER: N331X-002-01

1-3u" 2-6u" 3-15u"
4-30u" 5-50u"

X0	0000000	NEW DESIGN			LINGER	102706	
MARK	ECN-NO.	REVISION RECORD			DRAWN	DATE	
		UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED		
		Dimension Range	Tolerance	1:1	UNIT		
		X.X	±0.20	mm			
		X.XX	±0.15	SIZE	APPROVED		
		X.XXX	±0.10				
		ANGLE	±5°	A3		SHEET	1/1
Material/Plated/Notes		NAME					
SEE NOTE		SIDE ENTRY 8P8C SMT JACK					
Tooling No.		PART NO.				REV.	
		SEE NOTE				A	
		DOC. NO.					
		NN330A002					