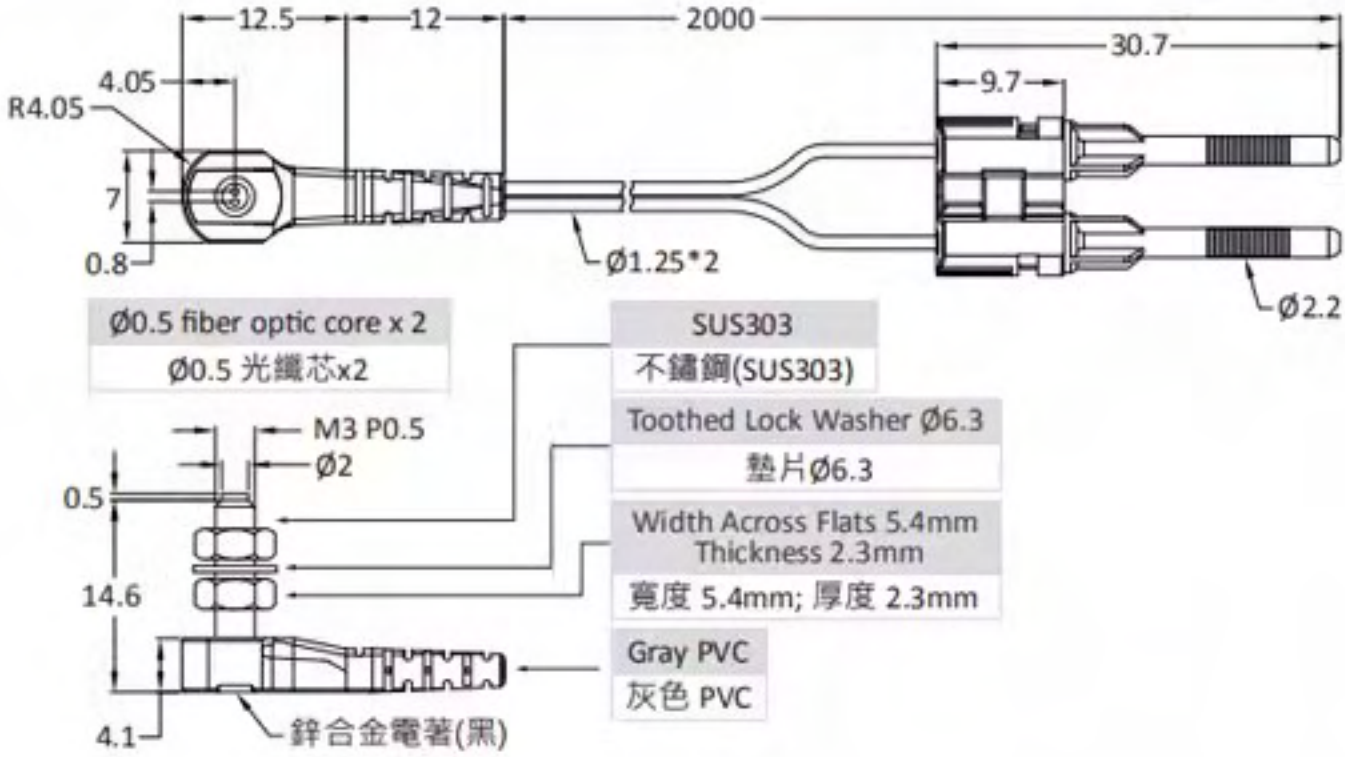
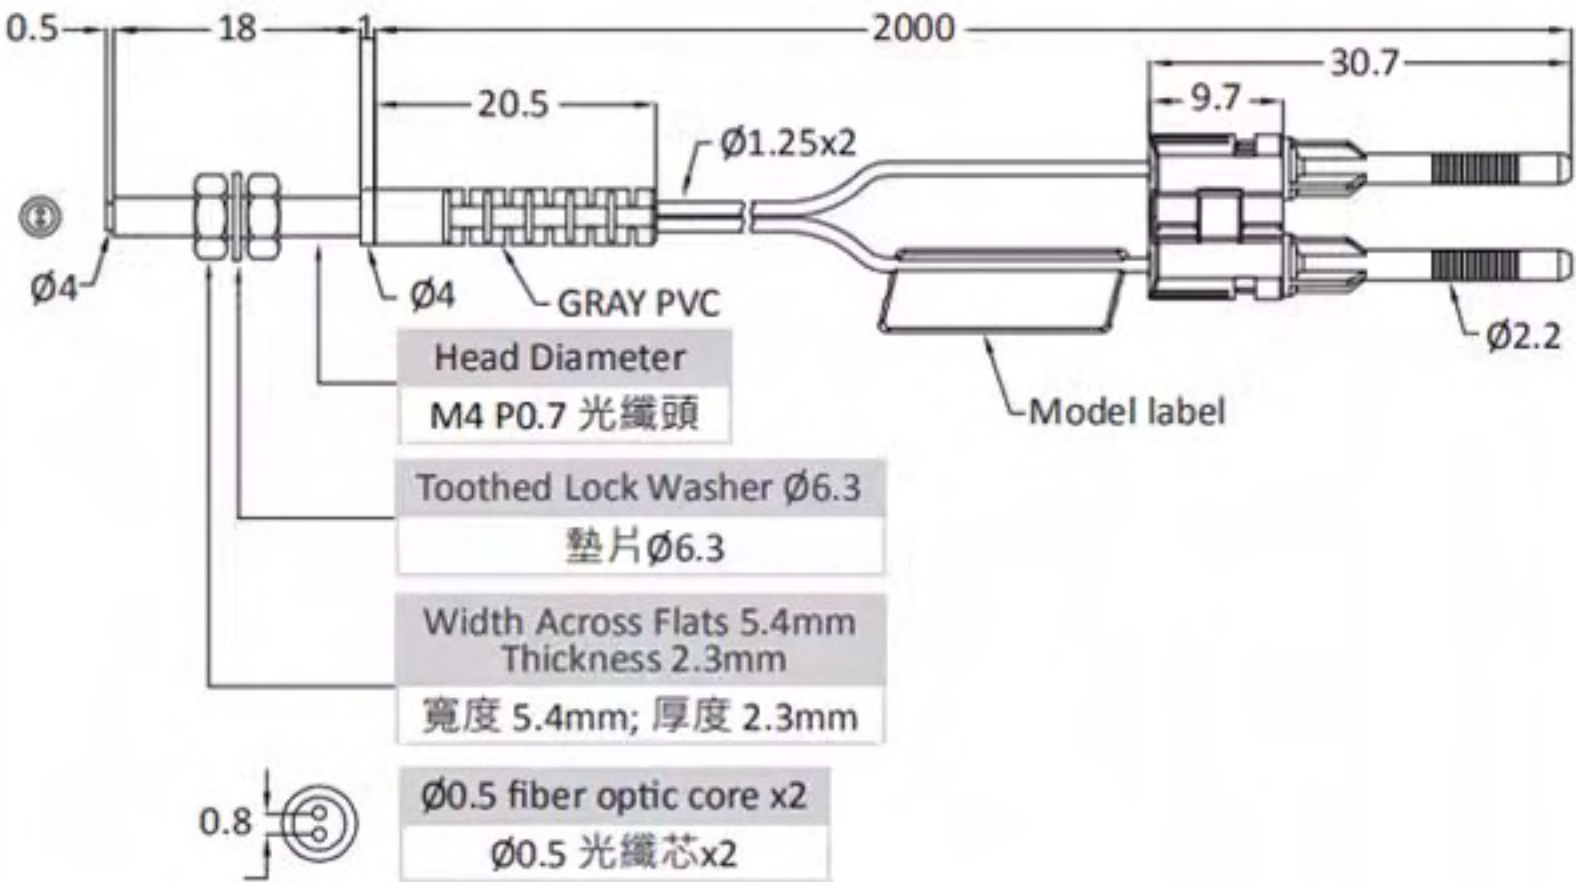
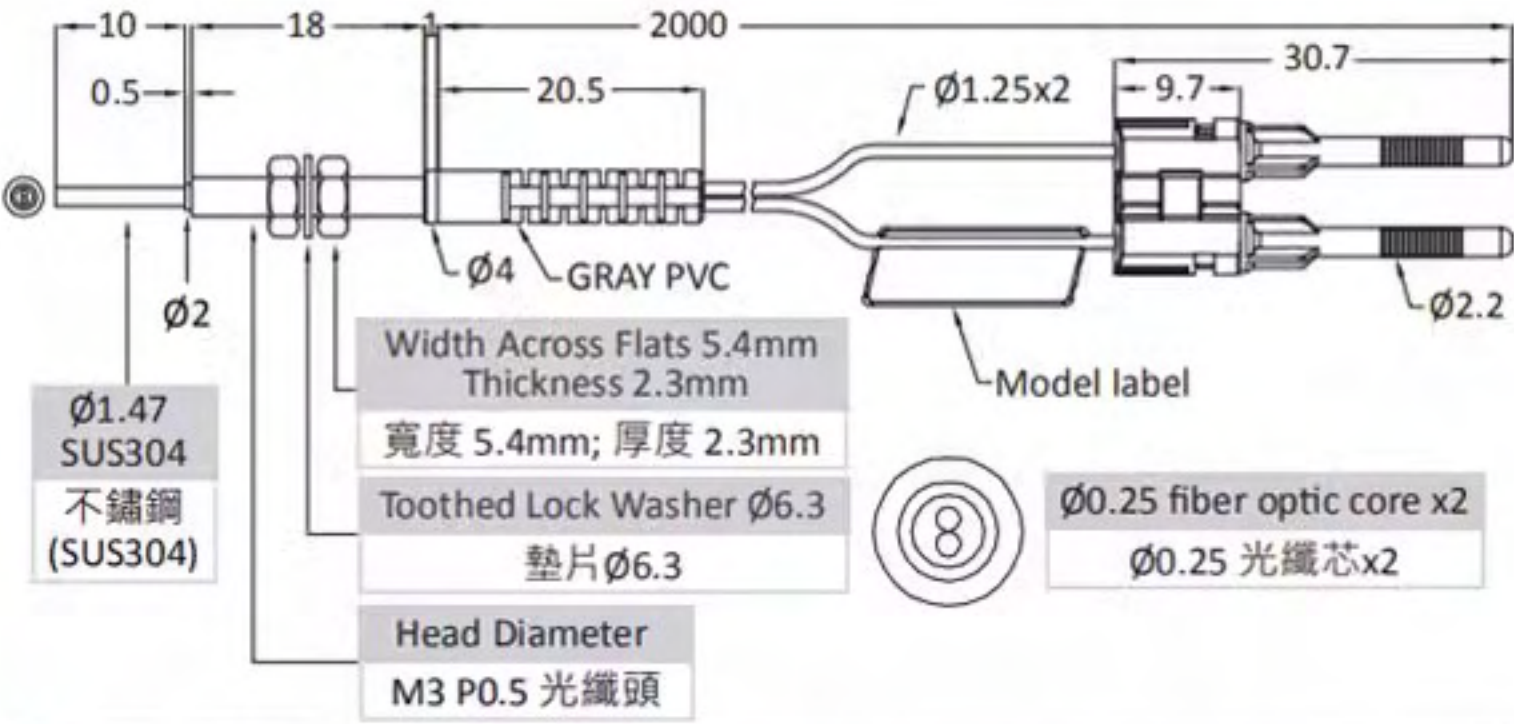
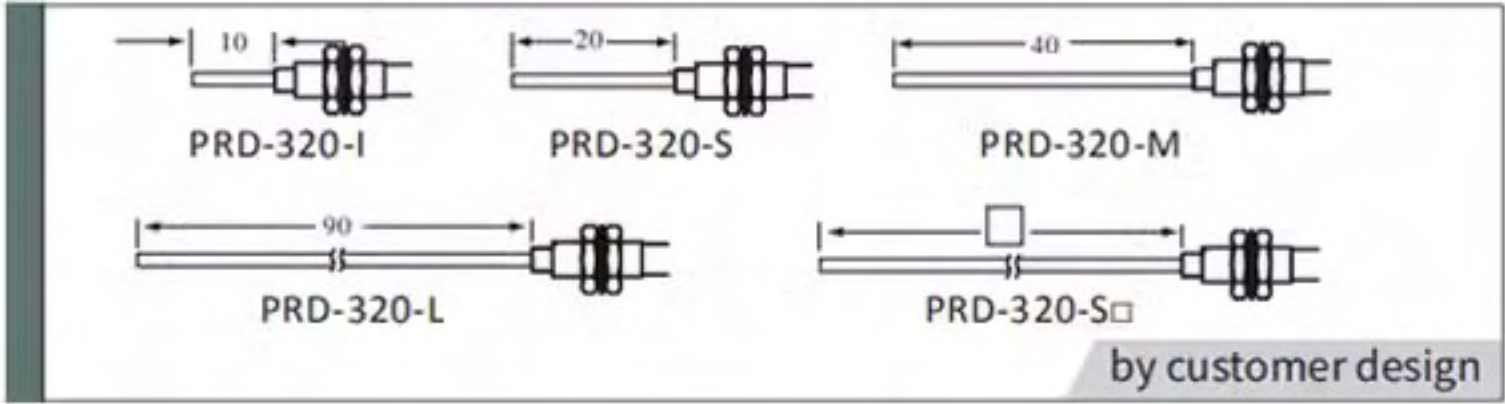


型號 / Model	尺寸 / Dimensions	規格 / Datasheet
PRD-320-T01 	 12.5 12 2000 30.7 9.7 4.05 R4.05 7 0.8 Ø1.25*2 Ø2.2 Ø0.5 fiber optic core x 2 Ø0.5 光纖芯x2 SUS303 不鏽鋼(SUS303) Toothed Lock Washer Ø6.3 墊片Ø6.3 Width Across Flats 5.4mm Thickness 2.3mm 寬度 5.4mm; 厚度 2.3mm Gray PVC 灰色 PVC Ø2 M3 P0.5 14.6 0.5 4.1 鍍合金電鍍(黑)	- 光纖直徑 / Fiber diameter OD=Ø1.25 ; ID=Ø0.5 - 感應距離 / SD : 25mm※ - 工作溫度 / Operate temperature : -55°C~+70°C - 最小彎曲半徑 / Mini. bending radius: R15 - 出光角度 / Light angle : 60° 勝特力材料 886-3-5753170 胜特力电子(上海) 86-21-34970699 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw
PRD-320-B1 	 0.5 18 1 2000 30.7 9.7 20.5 Ø1.25x2 Ø2.2 Ø4 GRAY PVC Head Diameter M4 P0.7 光纖頭 Toothed Lock Washer Ø6.3 墊片Ø6.3 Width Across Flats 5.4mm Thickness 2.3mm 寬度 5.4mm; 厚度 2.3mm Model label Ø4 0.8 Ø0.5 fiber optic core x2 Ø0.5 光纖芯x2	- 光纖直徑 / Fiber diameter OD=Ø1.25 ; ID=Ø0.5 - 感應距離 / SD : 30mm※ - 工作溫度 / Operate temperature : -55°C~+70°C - 最小彎曲半徑 / Mini. bending radius: R15 - 出光角度 / Light angle : 60°
PRD-320-I 	 10 18 1 2000 30.7 9.7 20.5 Ø1.25x2 Ø2.2 Ø4 GRAY PVC Width Across Flats 5.4mm Thickness 2.3mm 寬度 5.4mm; 厚度 2.3mm Model label Ø2 Ø1.47 SUS304 不鏽鋼 (SUS304) Toothed Lock Washer Ø6.3 墊片Ø6.3 Head Diameter M3 P0.5 光纖頭 Ø0.25 fiber optic core x2 Ø0.25 光纖芯x2	- 光纖直徑 / Fiber diameter OD=Ø1.25 ; ID=Ø0.5 - 感應距離 / SD : 30mm※ - 工作溫度 / Operate temperature : -55°C~+70°C - 最小彎曲半徑 / Mini. bending radius: R15 - 出光角度 / Light angle : 60°
PRD-320-M	 10 20 40 90 PRD-320-I PRD-320-S PRD-320-M PRD-320-L PRD-320-S□ by customer design	