


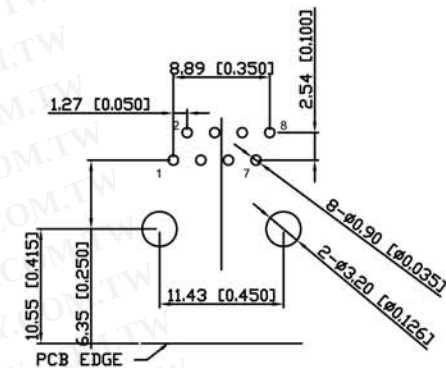
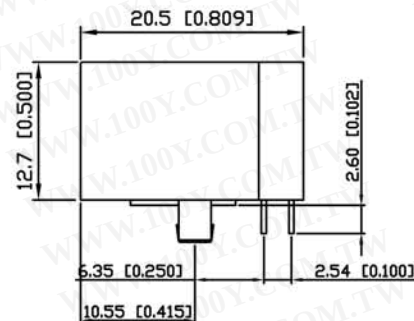





SUGGESTED PCB LAYOUT
(TOP VIEW)
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

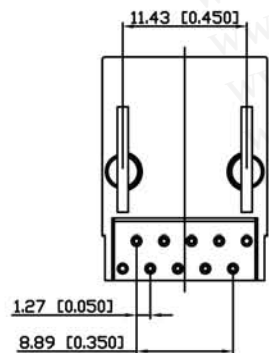

RECOMMENDED
PANEL CUTOUT DIMENSION

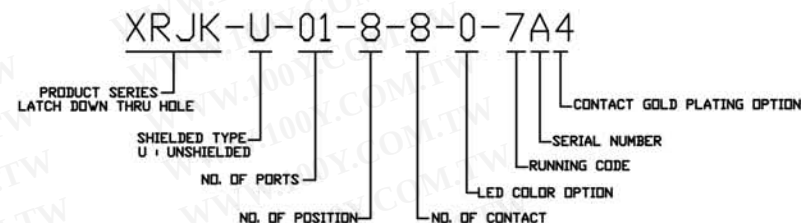

NOTES:

- MATERIALS:
HOUSING-PBT POLYESTER UL-94V-0 MIXED GLASS FIBER.
STANDARD COLOR-BLACK
CONTACTS-0.45mm DIA. ROUND PHOS-BRONZE PLATED WITH 6u" GOLD.
- OPERATING TEMPERATURE: -40°C ~ +85°C
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

RoHS Compliant

CONNECTING THE INFORMATION AGE				
G/NO:				82
DWG NO:				XRJK-U-01-8-8-0-7A4
TITLE:				RJ45 Connectors, W/O LED, 8P,8C, Unshielded, Thru-Hole
PART NO:				XRJK-U-01-8-8-0-7A4
UNIT		SHEET	REV	DATE:
mm[Inch]		1 of 1	A	