




AD4010 SERIES



External Dimensions

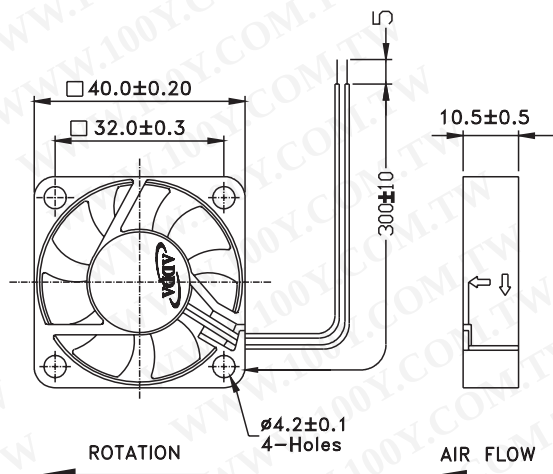

Frame: Plastic (UL:94V-0)
Impeller: Plastic (UL:94V-0)
Bearing: Ball, Sleeve, 1B1S, Hypro bearing
Lead wire: UL1007AWG26
VOLTAGE AVAILABLE: 5V, 12V, 24V


Specifications (Nominal)

*Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Rated Current (A)	Actual Current (A)	Rated Power (W)	Actual Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	*Noise Level (dB/A)	Weight (g)
40x40x10	AD0405LB-G70(T)	◎ ※ ○ ●	5	0.08	0.07	0.40	0.35	4200	0.132	4.70	0.61	2.53	14.0	24.0
	AD0405MB-G70(T)	◎ ※ ○ ●	5	0.11	0.11	0.55	0.55	4800	0.161	5.70	0.78	1.98	20.0	
	AD0405HB-G70(T)	◎ ※ ○ ●	5	0.19	0.16	0.95	0.80	6000	0.189	6.70	0.102	2.54	25.0	
	AD0412LB-G70(T)	◎ ※ ○ ●	12	0.07	0.06	0.84	0.72	4200	0.132	4.70	0.61	1.52	14.0	
	AD0412MB-G70(T)	◎ ※ ○ ●	12	0.08	0.06	0.96	0.72	4800	0.161	5.70	0.079	1.98	20.0	
	AD0412HB-G70(T)	◎ ※ ○ ●	12	0.10	0.09	1.20	1.08	6000	0.189	6.70	0.102	2.54	25.0	
	AD0424LB-G70(T)	◎ ※ ○ ●	24	0.07	0.03	1.68	0.72	4200	0.132	4.70	0.31	1.52	14.0	
	AD0424MB-G70(T)	◎ ※ ○ ●	24	0.08	0.04	1.92	0.96	4800	0.161	5.70	0.079	1.98	20.0	
	AD0424HB-G70(T)	◎ ※ ○ ●	24	0.09	0.06	2.16	1.44	6000	0.189	6.70	0.102	2.54	25.0	

Specifications subject to change without notice.

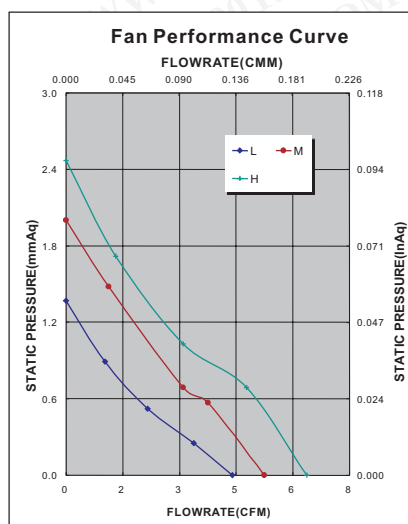

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓	✓	✓		✓					✓

*Safety approvals

✓	✓		✓	✓