

FD9232 SERIES



92x92x32mm

- Airflow: 42.6~86.8 CFM
- Static Pressure: 3.5~14.3 mm-H₂O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #22 AWG
- Weight: 183.0 g

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Model No.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Max. Airflow CFM	Max. Static Pressure mm-H ₂ O	Current mA	Power Consumption W	Life at 40°C L10 Hour	P-Q Curve	Noise Level dB(A)
FD129232LB	2B	12	7~13.2	2300	42.6	3.5	130	1.56	80000	4	34.0
FD129232MB	2B		7~13.2	3200	58.7	6.9	270	3.24	80000	3	42.5
FD129232HB	2B		7~13.2	4000	73.3	10.7	490	5.88	75000	2	47.0
FD129232EB	2B		7~13.2	4700	86.8	14.3	800	9.60	65000	1	51.0
FD249232LB	2B	24	12~26.4	2300	42.6	3.5	90	2.16	80000	4	34.0
FD249232MB	2B		12~26.4	3200	58.7	6.9	170	4.08	80000	3	42.5
FD249232HB	2B		12~26.4	4000	73.3	10.7	260	6.24	75000	2	47.0
FD249232EB	2B		12~26.4	4700	86.8	14.3	420	10.08	65000	1	51.0
FD489232LB	2B	48	24~56.0	2300	42.6	3.5	70	3.36	80000	4	34.0
FD489232MB	2B		24~56.0	3200	58.7	6.9	120	5.76	80000	3	42.5
FD489232HB	2B		24~56.0	4000	73.3	10.7	210	10.08	75000	2	47.0
FD489232EB	2B		24~56.0	4700	86.8	14.3	280	13.44	65000	1	51.0


2B: 2-ball bearing BS: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

Voltage Available
 05 12 24 48

Bearing System Available
 2B L S

Function Available
 N A I F R Q S T M V C P D W U

PERFORMANCE P-Q CURVE

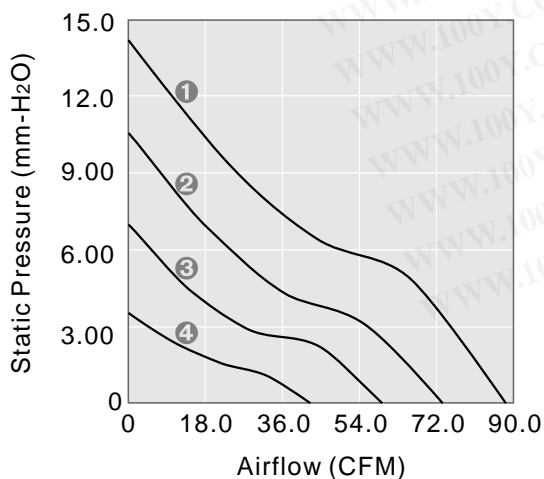

OUTLINE DIMENSIONS

