
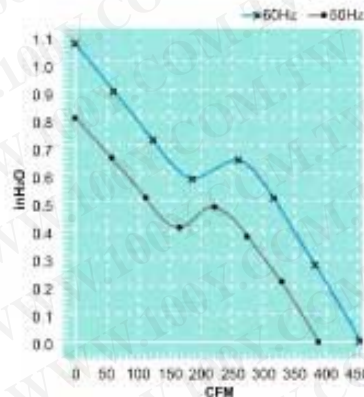


UF18J(C) Series

Size : 180 x 180 x 90
Unit : mm

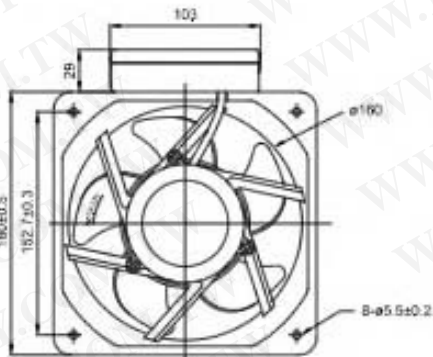

Thermal Protection

Terminal

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Spec.	Rated Voltage	Frequency	Input Power	Rated Current	Locked Current	Speed	Maximum Air Flow	Maximum Air Flow	Maximum Pressure	Maximum Pressure	Noise	Weight
Model	V	Hz	W	A	A	RPM	m ³ /min.	CFM	mmH ₂ O	InchH ₂ O	dB	kg
UF18JC10-H	100V	50	78	1.05	2.05	2850	11	390	20	0.78	54	2.2
		60	72	0.77	2.30	3400	13	460	27	1.06	59	
UF18JC11-H	115V	50	78	0.88	2.00	2850	11	390	20	0.78	54	2.2
		60	72	0.63	2.01	3400	13	460	27	1.06	59	
UF18JC20-H	200V	50	75	0.48	0.97	2850	11	390	20	0.78	54	2.2
		60	72	0.38	0.98	3400	13	460	27	1.06	59	
UF18JC23-H	230V	50	75	0.42	1.00	2850	11	390	20	0.78	54	2.2
		60	72	0.31	1.01	3400	13	460	27	1.06	59	

GENERAL DATA

General Data:

- Frame/Housing : Aluminum die-casting
- Impeller : Plastic PBT PC, nylon or metal.
- Bearing System : Ball bearing or sleeve bearing
- Motor : Shaded pole or capacitor start-run
- Connection : Lead wire or terminal type
- Protection : Impedance protection or thermal protection
- Insulation Resistance : Above 100M Ω , DC500V.
- Dielectric withstand voltage : AC 1500V (50/60Hz) one minute
- Operating Temperature : Ball bearing: -40°C~70°C
Sleeve bearing: -20°C~70°C
- Life Expectancy : Ball bearing: over 40,000 hr. (At 40°C)
Sleeve bearing: over 15,000 hr. (At 40°C)
- Safety Approval : UL, CUL, CE, TUV or ETL.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



● Description of Model No.

UF	12	A	(R)	11	B	T	H	N
1	2	3	4	5	6	7	8	9

1. UF:

Fulltech

2. Size:

12 : 120 x 120mm

13 : 127 x 127mm

92 : 92 x 92mm

80 : 80 x 80mm

15 : 150 x 172mm

17 : 172 x 172mm

25 : 254 x 254mm

60 : 60 x 60mm

16 : 160 x 160mm

18 : 180 x 180mm

3. Thickness:

A : 38mm

B : 25mm

D : 30mm

G : 89mm

K : 55mm

P : 51mm

F : 62mm

J : 90mm

H : 107mm

4. Special Design:

C : Capacitor Start-run

R : Reverse Air

M : Metal Impeller

CR : Capacitor Induction Motor
+ Reverse Air

MR: Metal Impeller + Reverse Air

E : Without Frame

A : 3 Phases

5. Input Voltage:

11 : 115V

23 : 230V

10 : 100V

20 : 200V

6. Bearing:

B : Ball

S : Sleeve

7. Electrical Connection:

T : Terminal Type

W : Lead Wire

8. Speed:

H : High

M : Medium

L : Low

9. Feature:

N : Motor Sealed

D : Stator

Painted

Any customer's design are welcome, Example: 120V/230V Dual Voltage, HI/LO Double Speed and AC 24V, 48V, 380V, 440V are acceptable.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)