

GA-1063


60x60x30

DESIGN FEATURES


- *BEARING SYSTEM: BALL BEARING
- *IMPELLER: STEEL WITH FIBER GLASS FILLED UL 94V-0
- *HOUSING: DIE CAST ALUMINUM PAINTED BLACK OR NATURAL COLOR
- *MOTOR: SHADED POLE, IMPEDANCE PROTECTED
- *CONNECTING: TERMINAL & WIRE LEADS
- *SPEED: S-1 HIGH SPEED TYPE
- *OTHER VOLTAGE: 24, 48, 100, 380AC (50/60Hz) ARE AVAILABLE



DIMENSIONS:MM

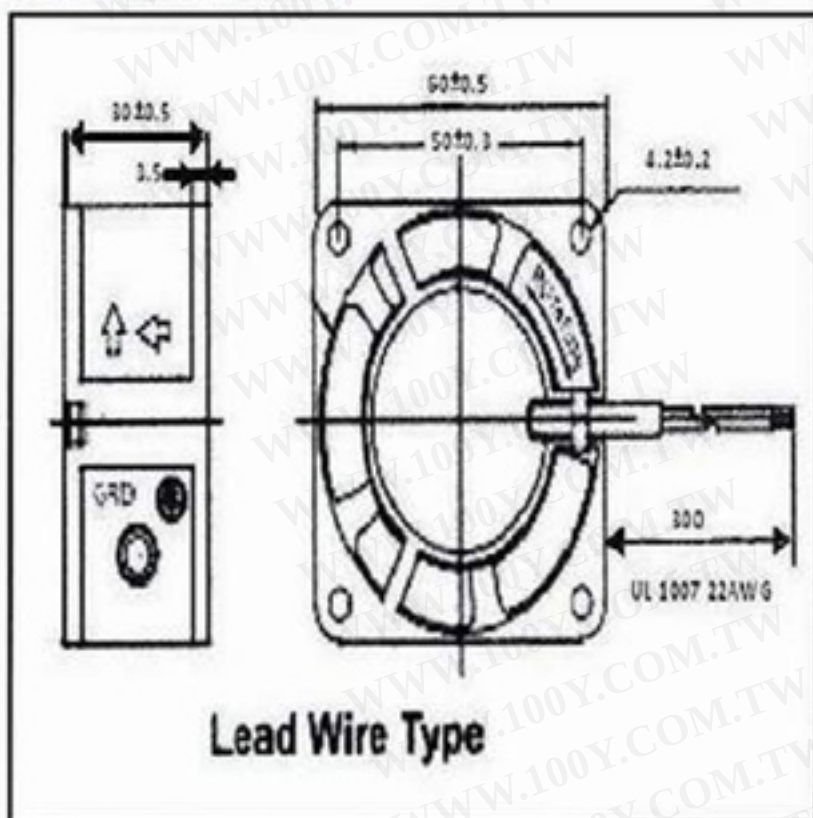

PERFORMANCE

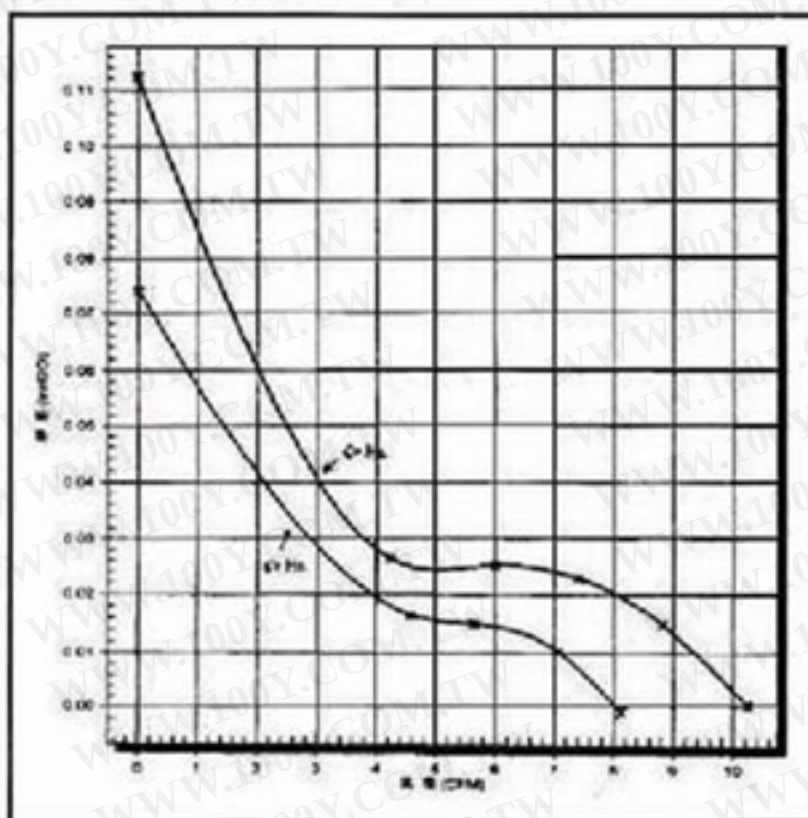

SPECIFICATIONS

MODEL NO.	VOLT (VAC)	FREQUENCY (HZ)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
GA1063HBL	110/120	50/60	8.1/10.24	0.23/0.29	0.042/0.035	6/5	2550/3100	0.07/0.11	27/28
GA2063HBL	220/240	50/60	8.1/10.24	0.23/0.29	0.022/0.016	6/5	2550/3100	0.07/0.11	27/28

Specifications are subject to change without notice

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

