
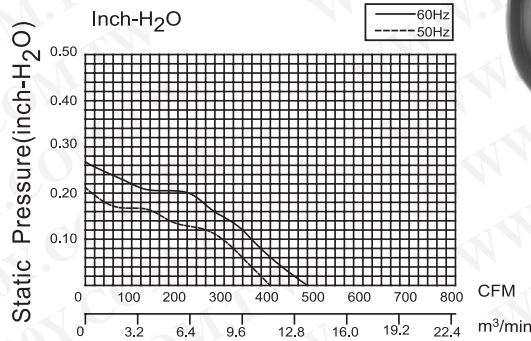


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



222 × 80 mm 四極三葉

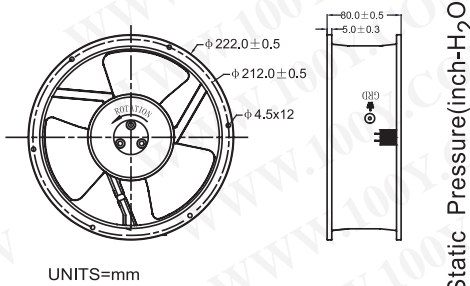

Model (型號)	Part No. Terminal	Bearing System (培林)	Rated Voltage(V) (電壓)	Freq (Hz) (頻率)	Current (A) (電流)	Input Power(w) (功率)	Speed (rpm) (轉速)	Air Flow (CFM) (風量)	Static Pressure (inch-H ₂ O) (靜壓)	Noise Level(dB-A) (噪音值)	Weight (g) (重量)
KA2208HA1-4	2208HA1BMT	Ball	110/120	50/60	0.19/0.20	20/24	1400/1700	400/480	0.21/0.27	40/50	1550
KA2208HA2-4	2208HA2BMT	Ball	220/240	50/60	0.15/0.13	31/30	1400/1700	400/480	0.21/0.27	40/50	1550
KA2208HA3-4	2208HA3BMT	Ball	380/400	50/60	0.15/0.12	39/33	1400/1700	400/480	0.21/0.27	40/50	1550

以上參考數據，如有變更恕不另行通知。 Specifications subject to change without notice.

222 × 80 mm 二極五葉

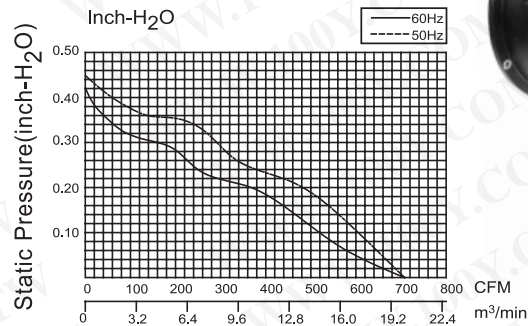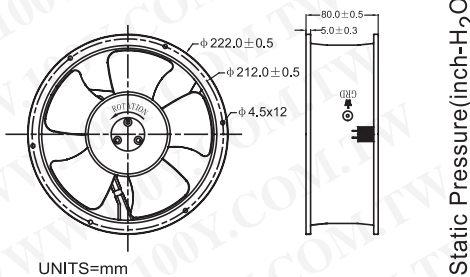

Model (型號)	Part No. Terminal	Bearing System (培林)	Rated Voltage(V) (電壓)	Freq (Hz) (頻率)	Current (A) (電流)	Input Power(w) (功率)	Speed (rpm) (轉速)	Air Flow (CFM) (風量)	Static Pressure (inch-H ₂ O) (靜壓)	Noise Level(dB-A) (噪音值)	Weight (g) (重量)
KA2208HA1-2	2208HA1BMT	Ball	110/120	50/60	0.5/0.6	54/67	2500/2500	710/710	0.45/0.43	60/60	1605
KA2208HA2-2	2208HA2BMT	Ball	220/240	50/60	0.22/0.29	49/64	2500/2500	710/710	0.45/0.43	60/60	1605
KA2208HA3-2	2208HA3BMT	Ball	380/400	50/60	0.13/0.16	50/63	2500/2500	710/710	0.45/0.43	60/60	1605

以上參考數據，如有變更恕不另行通知。 Specifications subject to change without notice.