


PMP-P-300 之 PMP-P-300A

Soft Thermal Conductivity Silicone

1.PMP-P-300A 剖面結構圖



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

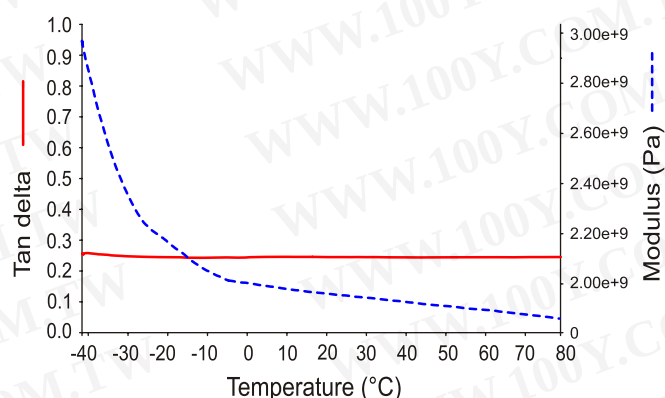

2.PMP-P-300A 物理特性表

PROPERTY		PMP-P-300A	Test Method
Thickness(mm)		0.2~6.0	ASTM D374
Specific Gravity		2.2	ASTM D792
Hardness(Shore A)		20±5	ASTM D2240
Tensile Strength(Kgf/cm ²)		2	ASTM D412
Elongation(%)		60	ASTM D412
Continuous Use Temp(°C)		-40~180	----
Thermal Conductivity(W/mK)		1.3	ASTM E1530
Volume Resistance(Ω-cm)		10 ¹⁵ ↑	ASTM D257
Dielectric Constant(ε)	60 Hz	6.3	ASTM D150
	1K Hz	5.7	
	1M Hz	5.3	
UL File Number		94V-0	E153203
RoHS		PASS	SGS ICP Test
Halogens free		PASS	SGS Test