

SPECIFICATION FOR APPROVAL

TO: _____

REF.No. _____

MODEL No. SA9225B1HT

DESCRIPTION: AC FAN (RoHs)

CONFIRMATION SIGNATURE

THIS OFFER IS MADE ACCORDING TO YOUR CURRENT INQUIRY.
UNLESS OTHERWISE REVISED, THIS SPECIFICATION WILL BE FINAL FOR
ALL FUTURE PRODUCTION ORDERS FROM YOUR RESPECTED COMPANY

KINDLY STUDY IN DETAILS AND RETURN TO US THE DUPLICATE DULY
SIGNED AS YOUR CONFIRMATION OF SAME.



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

AC AXIAL FAN

Customer	:	
Model No.	:	SA9225B1HT
SPECIFICATION		

Item	Specification / Condition	
Dimension 尺寸	:	92x92x25 mm
Bearing System 軸承	:	Dual Ball Bearing
Rated Voltage 額定電壓	:	115 VAC
Operating Voltage 工作電壓	:	100 VAC — 125 VAC
Start-up Voltage 啟動電壓	:	80 VAC Normally
Operating Frequency 操作頻率	:	50 / 60 HZ
Rated Current 額定電流	:	0.19 / 0.18 Amp Normally
Operating Frequency 消耗功率	:	19 / 18 Watt Normally
Rated Speed 轉速	:	2550 / 2900 RPM $\pm$ 10%
Air Flow 風量	:	0.85 / 1.05 m ³ / min (30 / 37 CFM)
Static Air Pressure 靜壓	:	3.30 / 4.83 mmH ₂ O
Noise Level 噪音	:	32 / 37 dBA
Motor Protection Type 馬達保護形式	:	By Impedance
Life Expectancy 壽命	:	50000 Hours at 40°C
Operation Temperature 操作溫度	:	-20°C to + 75°C
Net Weight 淨重	:	260 Grams
Packing 包裝	:	50 Pcs Per Export Carton
Safety Approval 安規	:	☒ UL ☐ TUV ☐ CE

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

A:MECHANICAL


- A-1 Dimension -----See Attached
- A-2) Frame----- Die Cast Aluminum Painted Black
- A-3) Fan Blade -----Plastic With Fiber Glass UL 94V-0

B:ENVIRONMENTAL

- B-1) Operating Temperature ---- -10°C TO+70°C
- B-2) Storage Temperature----- -40°C TO+80°C
- B-3) Drop Test:
In Minimum Packaging Condition Fans Withstands Each One Drop Of Three Faces From 30cm Distance Height Onto 10mm Thickness Of Wooden Board
- B-4) Vibration Test:
Frequency:10-50HZ Amplitude
X.Y.X Direction Each For 1HR
- B-5) Shock Test:
Apply Peak Acceleration 50g and Keep Duration of The Pulse For 11ms (Half Sine Wave)
- B-6) Insulation Resistance:
100M Ohm minimum at DC 500V.
- B-7) Dielectric Strength:
1500VAC For 01sec(<0.5mA ALLOWABLE,BETWEEN LEAD AND HOUSING.)


C:ACOUSTICAL NOISE:

- C-1) Measurement Ste-up

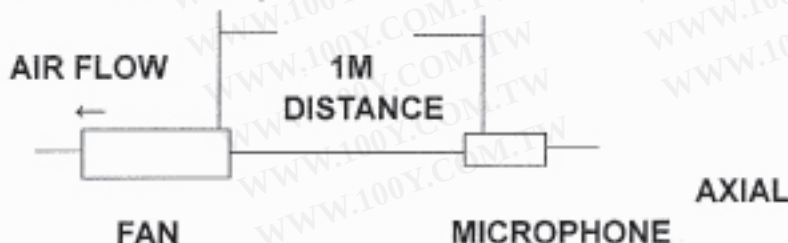

- C-2) Measurement Performed In Anechoic Est Chamber Under Free Air Condition
- C-3) Chamber Back Ground NOISE 17dB Max.
- C-4) Reading Taken From Spectroun Analyzer.


D: STATICS PRESSURE VS AIR FLOW CURVE :

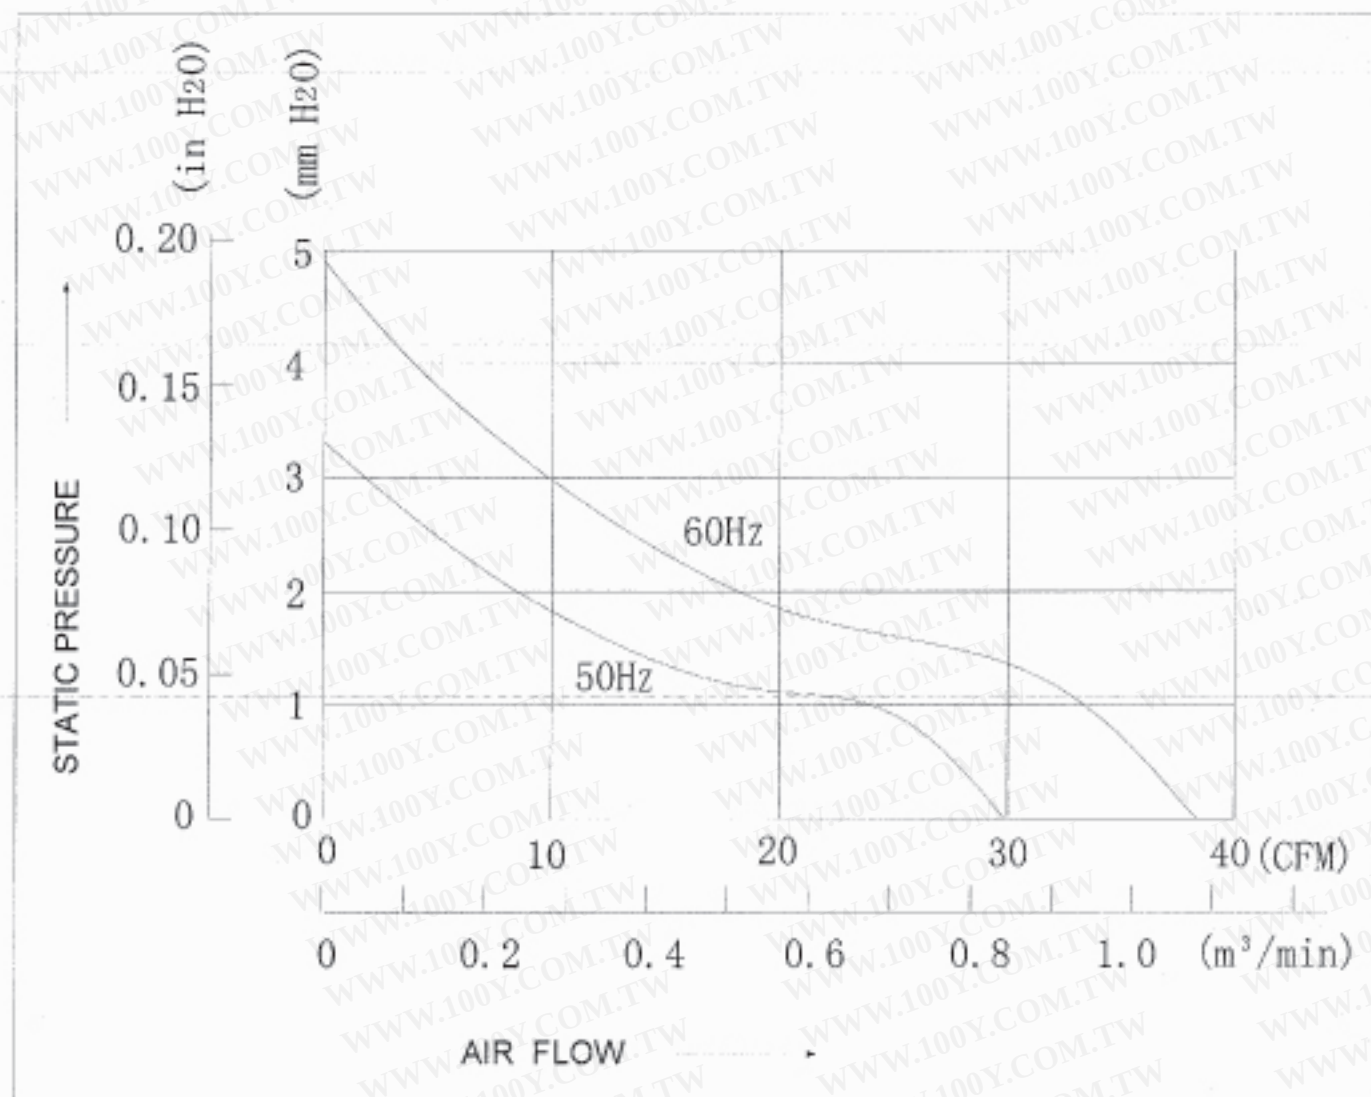

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

E:OUTLINE STYLING & DIMENSIONS :

Unit: MM

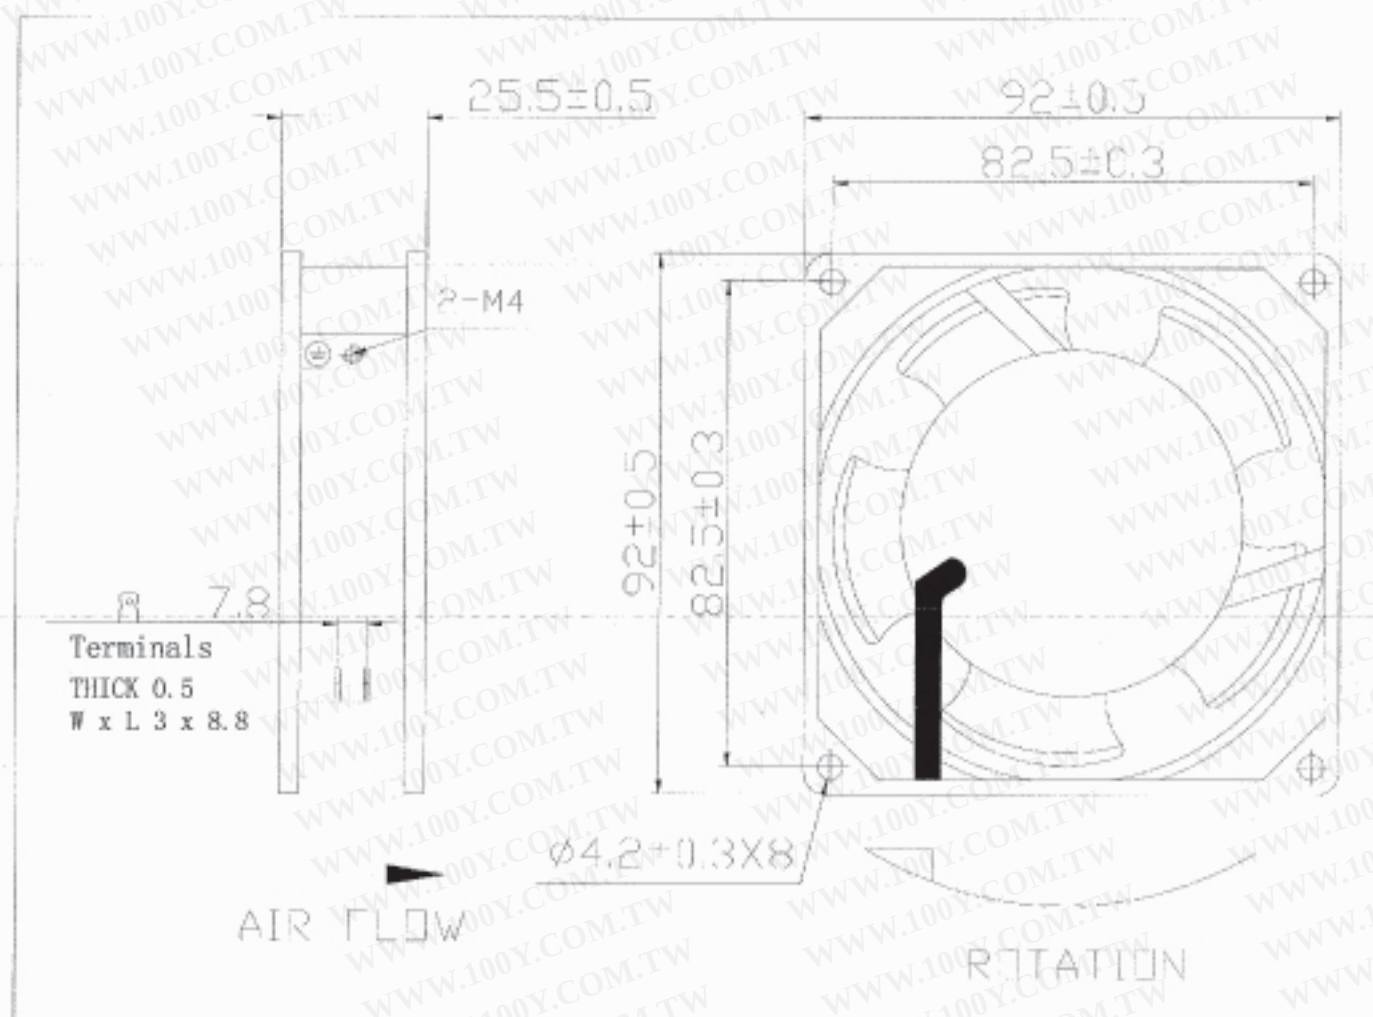

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



GPWV2.E350026
Fans, Electric - Component

[Page Bottom](#)

Fans, Electric - Component

[See General Information for Fans, Electric - Component](#)

E350026

AC fans, Models SA8025(A)1H(Y) (@), SA8038(A)1H(Y) (@), SA9225(A)1H(B)(Y) (@), SA12025(A)1H(B)(Y) (@), SA12038(A)1H(B)(Y) (@), SA15050(A)1H(B)(Y) (@).

Models SA8025(A)2(B)(C)(Y) (#), SA8038(A)2(B)(C)(Y) (#), SA9225(A)2(B)(C)(Y) (#), SA12025(A)2(B)(C)(Y) (#), SA12038(A)2(B)(C)(Y) (#), SA15050(A)2(B)(C)(Y) (#).

Note: (@) (A) may be S or B, (B) may be L or T, (Y) may be letter A through Z and/or 0 through 9, or blank

(#) (A) may be S or B, (B) may be X, H, M or L, (C) may be T or L, (Y) may be letter A through Z and/or 0 through 9, or blank

Marking: Company name and model designation.

Last Updated on 2011-09-26

[Questions?](#)

[Print this page](#)

[Notice of Disclaimer](#)

[Page Top](#)

[Copyright](#)

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be listed and covered under UL Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright 2011 Underwriters Laboratories Inc."

An independent organization working for a safer world with integrity, justice and knowledge



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)