
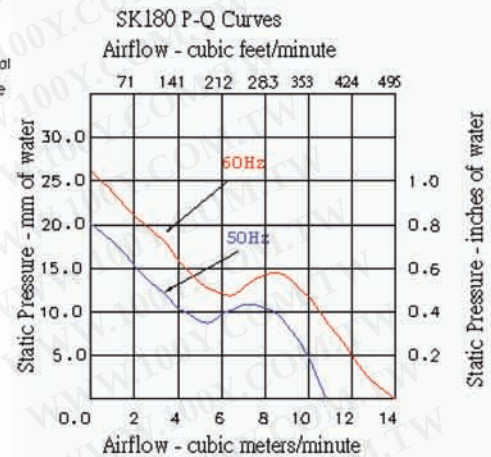


AC FAN SK180AP

180×180×65mm (7")

450~380 CFM

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

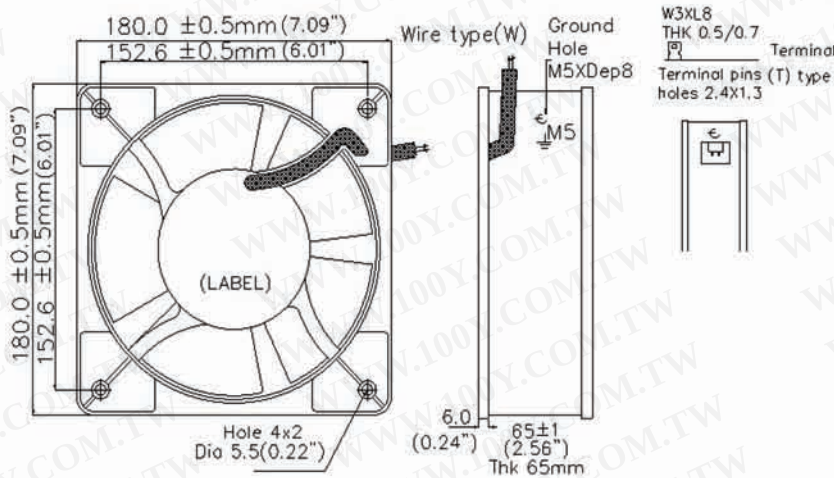

- 馬達 Motor : Single phase induction capacitor motor, thermally protected
- 外殼 Housing / Frame : Die-cast aluminum, Painted black(AP) or Plated(AN)
- 風葉 Impeller : Glass reinforced thermoplastic, UL 94V-0
- 軸承 Bearing System : Two-ball bearing
- 接電方式 Connections : T-Terminal push-on or W-Lead wire type
- 耐壓 Dielectric Strength : 1 min. at 1,500 VAC, 50/60Hz
- 溫度範圍 Operating Temp. : Recommended ambient range -20°C ~+75°C
- 壽命 Life Expectancy : 60,000 hours at 25°C
 40,000 hours at 65°C
- 淨重 Net Weight : 1.8 kg (3.97 pounds) ± 10%
- 檢定 Safety Approvals : UL E202962 and cUL E202962 and CE and TUV R3-50007468



型號 Model No.	電壓 Rated VAC	電壓範圍 Voltage Range VAC	頻率 Freq. Hz	電流 Rated Input AMP	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM		最大風壓 Max. Static Pressure mm-H₂O inch-H₂O		噪音 Noise (dB)
SK180AP-11-1	100	70-110	50/60	0.557/0.480	51.6/55.5	2800/3250	10.8/13.0	355/405	20/26	0.66/0.83	60±2
	115	80-130									
SK180AP-22-1	200	150-210	50/60	0.196/0.220	43.5/53	2800/3250	10.8/13.0	355/405	20/26	0.66/0.83	60±2
	220	150-240									
	240	160-260									