

產品資訊：57GS 防震型多功能警示燈



產品圖片放大

57GS 防震型多功能警示燈

57GS 防震型多功能警示燈

57GS MULTI-FUNCTIONAL ANTI-VIBRATION SIGNAL LIGHT

• 57LG



分離防震系統

本公司所研發之分離防震是將燈塔與燈身區隔，中間採取吸震柱墊結合(圖一)，使工作母機運轉時所產生的震波能有效被消除，確保燈塔內各項零組件使用壽命更加延長。

OVDS-Obstructed Vibration Dampening System

This OVDS (Obstructed Vibration Dampening System) is peculiarly designed and connected with a vibration



dampener (as structured and indicated) that goes between the light and its holding racks. This dampener efficiently absorbs and deletes the vibrating wave during operation, and incredibly extends the service life of internal accessories as long as can be.

省空間功能

為配合工作母機運送、封箱等等之情形須卸下警示燈之不便，特別研發可折疊式燈塔(圖二)使空間、時間得到充分的運用，更使工作更加方便，也可確保警示燈避免不必要的傷害，而增加警示燈之壽命。

Space Saving


Foldable holding structure has it even more economical and practical to make good use of the space and timing in packaging the main machines. It is also helpful to protect the signal lights from unnecessary damage during transportation, which also helps extending the service time of such equipment.

支架種類說明


由於目前加工母機種類、型式、規格眾多，為使裝配更方便而設計 A~G 型支架型式搭配各母機之需求。

Instructions of The Choice of Holding Arms

Since there are various sorts of machines with different specifications that exist in the machine market, we have therefore developed following holding arms for the purpose of fitting such machines.



圖一



圖二

57GS防震型多功能LED 警示燈 57GS MULTI-FUNCTIONAL ANTI-VIBRATION LED SIGNAL LIGHT

57GS SERIES

燈塔高度對照表	高度(A)
一層	78 mm
二層	144 mm
三層	210 mm
四層	276 mm
五層	342 mm

註：可使用之燈塔顏色為紅、綠、藍、白五種

Height Scale Of Holding Racks

Number Of Racks	Height(A)
1	78 mm
2	144 mm
3	210 mm
4	276 mm
5	342 mm

Remark: Available colors for racks: Red, Green, Blue, Orange, transparent only.

警示燈系列代碼說明 Part No. For Signal Light Series

GSL-24-3GRY-A

配合配件種類A-G
Accessory No. (A~G)

第三層的顏色
Color of third layer

第二層的顏色
Color of second layer

第一層的顏色
Color of first layer

層數
Quantity of color layers

1. AC/DC:24V/10W
2. AC:110V/10W
3. AC:230V/10W

GSL ... 燈亮 Flashless
GSE ... 閃爍 Flashing
GSS ... 蜂鳴 Buzzer
GSES ... 閃爍+蜂鳴 Flash+Buzzer


規格 Specifications

型號 Type	瓦特數 Watts	本體直徑	電源·電壓 Supply Voltage	防水規格 Enclosure IP	採購代號 Order No.
LGL	10W	57mm	24V 110V / 220V	IP-23	
LGE	10W			IP-23	
LGS	10W			IP-20	
LGES	10W			IP-20	

固定座 Mount

A 型 (TYPE)	B 型 (TYPE)	C 型 (TYPE)	D 型 (TYPE)	E 型 (TYPE)	F 型 (TYPE)	G 型 (TYPE)
加長型尺寸高度 1.長300mm 2.短150mm Longer length and height (as structured and indicated below) 1. Length:300mm 2. Height:150mm						
A AI A2	B BI B2	C CI C2	D DI D2	E EI	F FI	G

■ 尺寸規格 Specifications

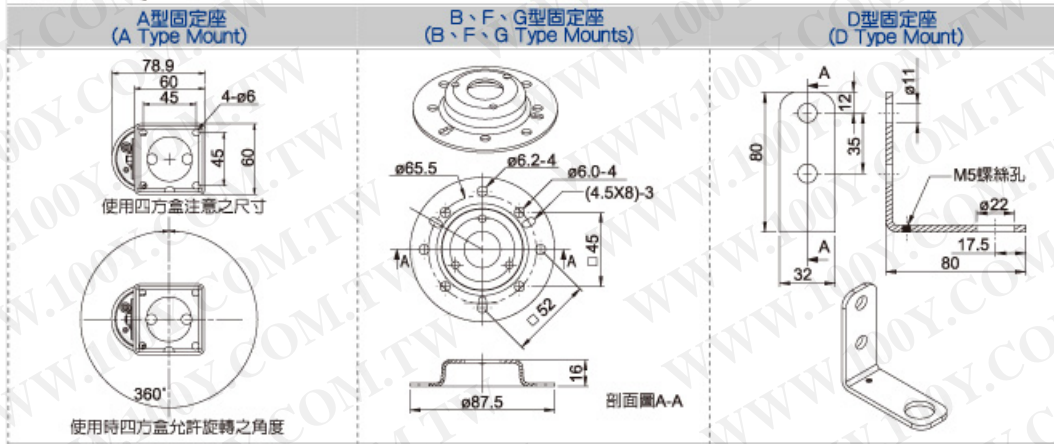

■ 接線圖 wiring diagram

