勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

PCE

Connection
to the future

POWER TWIST

63A/125A

Safety

POWER TWIST

Lamellar spring

- low insertion and extraction forces
- minimum contact resistance
- self-cleaning
- optimum contact - at least 10 contact points

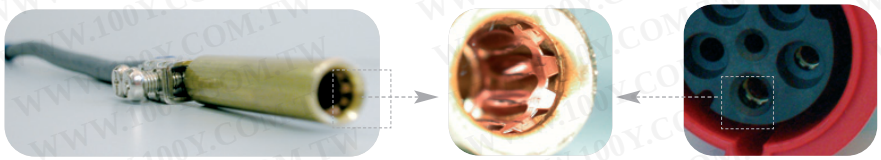

TWIST-cable gland

- secures the cable firmly in position
- protects from water and dust

Safety screw

- locks the screw cap in position

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw





Heavy Duty

POWER TWIST

- **For extreme environments**
- **Exceptional high impact resistance**
- **Extreme heat resistant contact carriers**
- **Anti-corrosion contacts**
  - ➤ offer protection in aggressive atmospheres, e.g. in chemical plants, food industries

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw



Time Saving

POWER TWIST

- **TWIST-cable gland**
  - ➤ quick and easy assembly
- **Optimum grip**
  - ➤ slim easy-grip shape - for ease of handling
- **Ample connection space**
  - ➤ fast cable installation
- **Open contact terminals, ready for assembly**

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

Order numbers

Amps	Poles	Order No. 110V~ 50/60Hz 4h	Order No. 230V~ 50/60Hz 3p=6h 4p+5p=9h	Order No. 400V~ 50/60Hz 3p=9h 4p+5p=6h	Order No. 500V~ 50/60Hz 7h	Order No. >50-500V~ 100-300Hz 10h
“Power Twist” plug						
- with Twist-cable gland - nickel-plated contacts with pilot contact						
IP66/67						
for waterproof cover see Accessories						
63	3	033-4	**033-6**	033-9	033-7	033-10
63	4	034-4	034-9	**034-6**	034-7	034-10
63	5	035-4	035-9	**035-6**	035-7	035-10
125	3	043-4	**043-6**	043-9	043-7	043-10
125	4	044-4	044-9	**044-6**	044-7	044-10
“Power Twist” wall mounted plug						
- cable entry from top, bottom or rear - nickel-plated contacts with pilot contact						
IP66/67						
for waterproof cover and cable-gland see Accessories						
			Basic unit HxWxL = 170x118x175: 1xM40, 2xM32			
63	3	533-4	**533-6**	533-9	533-7	533-10
63	4	534-4	534-9	**534-6**	534-7	534-10
63	5	535-4	535-9	**535-6**	535-7	535-10
			Basic unit HxWxL = 260x160x209: 1xM63, 2xø40			
125	3	543-4	**543-6**	543-9	543-7	543-10
125	4	544-4	544-9	**544-6**	544-7	544-10
125	5	545-4	545-9	**545-6**	545-7	545-10
“Power Twist” flanged plug, straight						
- nickel-plated contacts with pilot contact						
IP66/67						
for waterproof cover see Accessories						
			Flange: 100x100, fixing center: 80x80			
63	3	633-4	**633-6**	633-9	633-7	633-10
63	4	634-4	634-9	**634-6**	634-7	634-10
63	5	635-4	635-9	**635-6**	635-7	635-10
			Flange: 120x120, fixing center: 100x100			
125	3	643-4	**643-6**	643-9	643-7	643-10
125	4	644-4	644-9	**644-6**	644-7	644-10
125	5	645-4	645-9	**645-6**	645-7	645-10
“Power Twist” flanged plug, sloping/angle						
- nickel-plated contacts with pilot contact						
IP66/67						
for waterproof cover see Accessories						
			Flange: 112x100, fixing center: 88x80			
63	3	733-4	**733-6**	733-9	733-7	733-10
63	4	734-4	734-9	**734-6**	734-7	734-10
63	5	735-4	735-9	**735-6**	735-7	735-10
			Flange: 130x120, fixing center: 108x100			
125	3	743-4	**743-6**	743-9	743-7	743-10
125	4	744-4	744-9	**744-6**	744-7	744-10
“Power Twist” connector						
- with Twist-cable gland - with lamellar contact - for version with pilot contact insert a “5” in the order number, e.g. 233**5**-6						
IP66/67						
63	3	233-4	**233-6**	233-9	233-7	233-10
63	4	234-4	234-9	**234-6**	234-7	234-10
63	5	235-4	235-9	**235-6**	235-7	235-10
125	3	243-4	**243-6**	243-9	243-7	243-10
125	4	244-4	244-9	**244-6**	244-7	244-10
125	5	245-4	245-9	**245-6**	245-7	245-10

IP66/67 watertight

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

Order numbers

"Power Twist" wall socket

- cable entry from top, bottom or rear
- with lamellar contact
- for version with pilot contact insert a "5" in the order number, e.g. 133**5**-6

IP66/67



HxWxL = 170x118x172



HxWxL = 260x160x190

Amps	Poles	Order No. 110V~ 50/60Hz 4h	Order No. 230V~ 50/60Hz 3p=6h 4p+5p=9h	Order No. 400V~ 50/60Hz 3p=9h 4p+5p=6h	Order No. 500V~ 50/60Hz 7h	Order No. >50-500V~ 100-300Hz 10h
		Basic unit HxWxL = 170x118x172: 1xM40, 2xM32				
63	3	133-4	**133-6**	133-9	133-7	133-10
63	4	134-4	134-9	**134-6**	134-7	134-10
63	5	135-4	135-9	**135-6**	135-7	135-10
		Basic unit HxWxL = 260x160x190: 1xM40, 2xø40				
63	3	1337-4	**1337-6**	1337-9	1337-7	1337-10
63	4	1347-4	1347-9	**1347-6**	1347-7	1347-10
63	5	1357-4	1357-9	**1357-6**	1357-7	1357-10
		Basic unit HxWxL = 260x160x201: 1xø50, 2xø40				
125	3	143-4	**143-6**	143-9	143-7	143-10
		Basic unit HxWxL = 260x160x201: 1xM63, 2xø40				
125	4	144-4	144-9	**144-6**	144-7	144-10
125	5	145-4	145-9	**145-6**	145-7	145-10

"Power Twist" flanged socket, straight

- with lamellar contact
- for version with pilot contact insert a "5" in the order number, e.g. 333**5**-6

IP66/67



Amps	Poles	Order No. 110V~ 50/60Hz 4h	Order No. 230V~ 50/60Hz 3p=6h 4p+5p=9h	Order No. 400V~ 50/60Hz 3p=9h 4p+5p=6h	Order No. 500V~ 50/60Hz 7h	Order No. >50-500V~ 100-300Hz 10h
		Flange: 100x100, fixing center: 80x80				
63	3	333-4	**333-6**	333-9	333-7	333-10
63	4	334-4	334-9	**334-6**	334-7	334-10
63	5	335-4	335-9	**335-6**	335-7	335-10
		Flange: 107x100, fixing center: 85x77				
63	3	333-4fc	**333-6fc**	333-9fc	333-7fc	333-10fc
63	4	334-4fc	334-9fc	**334-6fc**	334-7fc	334-10fc
63	5	335-4fc	335-9fc	**335-6fc**	335-7fc	335-10fc
		Flange: 120x120, fixing center: 100x100				
125	3	343-4	**343-6**	343-9	343-7	343-10
125	4	344-4	344-9	**344-6**	344-7	344-10
125	5	345-4	345-9	**345-6**	345-7	345-10

"Power Twist" flanged socket, sloping/angle

- with lamellar contact
- for version with pilot contact insert a "5" in the order number, e.g. 433**5**-6

IP66/67

Amps	Poles	Order No. 110V~ 50/60Hz 4h	Order No. 230V~ 50/60Hz 3p=6h 4p+5p=9h	Order No. 400V~ 50/60Hz 3p=9h 4p+5p=6h	Order No. 500V~ 50/60Hz 7h	Order No. >50-500V~ 100-300Hz 10h
		Flange: 112x100, fixing center: 88x80				
63	3	433-4	**433-6**	433-9	433-7	433-10
63	4	434-4	434-9	**434-6**	434-7	434-10
63	5	435-4	435-9	**435-6**	435-7	435-10

IP66/67 watertight

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

Order numbers

"Power Twist" flanged socket, sloping/angle

- with lamellar contact
- for version with pilot contact insert a "5" in the order number, e.g. 433**5**-6

IP66/67

Amps	Poles	Order No. 110V~ 50/60Hz 4h	Order No. 230V~ 50/60Hz 3p=6h 4p+5p=9h	Order No. 400V~ 50/60Hz 3p=9h 4p+5p=6h	Order No. 500V~ 50/60Hz 7h	Order No. >50-500V~ 100-300Hz 10h
		Flange: 107x100, fixing center: 85x77				
63	3	433-4fc	**433-6fc**	433-9fc	433-7fc	433-10fc
63	4	434-4fc	434-9fc	**434-6fc**	434-7fc	434-10fc
63	5	435-4fc	435-9fc	**435-6fc**	435-7fc	435-10fc
		Flange: 110x106, fixing center: 90x90				
63	3	433-4fd	**433-6fd**	433-9fd	433-7fd	433-10fd
63	4	434-4fd	434-9fd	**434-6fd**	434-7fd	434-10fd
63	5	435-4fd	435-9fd	**435-6fd**	435-7fd	435-10fd
		Flange: 130x120, fixing center: 108x100				
125	3	443-4	**443-6**	443-9	443-7	443-10
125	4	444-4	444-9	**444-6**	444-7	444-10
125	5	445-4	445-9	**445-6**	445-7	445-10
		Flange: 114x114, fixing center: 90x90				
125	3	443-4fe	**443-6fe**	443-9fe	443-7fe	443-10fe
125	4	444-4fe	444-9fe	**444-6fe**	444-7fe	444-10fe
125	5	445-4fe	445-9fe	**445-6fe**	445-7fe	445-10fe

"Power Twist" Switched interlocked socket

- mechanical interlock
- cable entry from top, bottom or rear
- with lamellar contact
- for version with pilot contact insert a "5" in the order number, e.g. 75352**5**-6

IP66/67



Amps	Poles	Order No. 110V~ 50/60Hz 4h	Order No. 230V~ 50/60Hz 3p=6h 4p+5p=9h	Order No. 400V~ 50/60Hz 3p=9h 4p+5p=6h	Order No. 500V~ 50/60Hz 7h	Order No. >50-500V~ 100-300Hz 10h
		Basic unit HxWxL = 260x160x201: 1xM40, 2xø40				
63	3	75332-4	**75332-6**	75332-9	75332-7	
63	4	75342-4	75342-9	**75342-6**	75342-7	
63	5	75352-4	75352-9	**75352-6**	75352-7	

Accessories

Waterproof cover

s7632g	IP67 waterproof cover for 63A plugs and appliance plugs
s1252g	IP67 waterproof cover for 125A plugs and appliance plugs

23321515200	**IP68 M32x1.5 screw fitting - black**	(cable diameter 18-25 mm)
23401518260	**IP68 M40x1.5 screw fitting - black**	(cable diameter 22-32 mm)
23501518310	**IP68 M50x1.5 screw fitting - black**	(cable diameter 32-38 mm)
23631518350	**IP68 M63x1.5 screw fitting - black**	(cable diameter 34-44 mm)

264015009	**M40 x 1.5 lock nut** Nickel-coated brass
265015009	**M50 x 1.5 lock nut** Nickel-coated brass

Note: For entries without threads, marked by "ø", the appropriate lock nuts should be used.