

AUTOMOTIVE FUSE-BLADE TYPE

BLADE AUTO FUSE

RoHS

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)




Part No. : ATO series

- Fast Acting, Low Voltage For UP To 32V DC.
- Material : *Body : Plastic.
*Metal : Zinc Alloy Strip.
- Standard : According To SAE J1284.
- Circuit Protection To Replace Fusible Wire Or Fusible Link.
- Fuses Are Color-Coded For Easy Amperage Identification.

Ordering Information

Part Number	Ampere (A)	Voltage (VDC)	Body Color
ATO-1	1 A	32 V	Black
ATO-2	2 A	32 V	Gray
ATO-3	3 A	32 V	Violet
ATO-4	4 A	32 V	Pink
ATO-5	5 A	32 V	Tan
ATO-7.5	7.5 A	32 V	Brown
ATO-10	10 A	32 V	Red
ATO-15	15 A	32 V	Blue
ATO-20	20 A	32 V	Yellow
ATO-25	25 A	32 V	Natural
ATO-30	30 A	32 V	Green
ATO-35	35 A	32 V	Purple
ATO-40	40 A	32 V	Orange

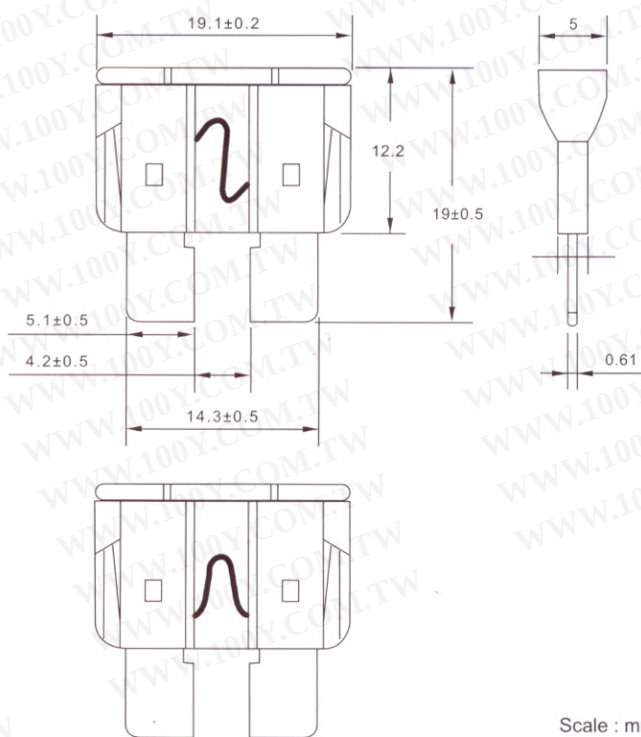

Specifications:

Opening Time / Pre-arcing Time :

In	1.1 In	1.35 In		2.0 In		3.5 In		6.0 In	
1-40 A	>100 Hours	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
		0.75 s	1800 s	0.15 s	5 s	0.04 s	0.5 s	0.02 s	0.1 s

Interruption Rating : 1000 Amperes @ 32V DC