

# 螺栓連接型保險絲

## BS88 FUSE LINK

本系列保險絲主要配為半導體設備的短路保護(aR)。

由銅製成的多截面熔體封裝於由高強度陶瓷製成的熔管內，熔管中充滿經化學處理過的高純度石英砂作為消弧介質。保險絲兩端採用點焊與連接板牢固電連接。

BS88 Series is designed to protect semiconductors (aR).

Copper-made multi-section element is encapsulated in a high-intensity ceramic body which filled with pure quartz sand as an arc extinguisher. The ends are point welded to the contact blades, the two ends of the enclosure are terminated by metal plates having high mechanical strength.

材質 陶瓷, 銅  
Material: Porcelain, Copper

電壓  
Voltage: AC240V, AC690V


特性  
Character: aR

短路容量  
Breaking Capacity: 100kA



額定電流 Amp.	型號 Part No.	電壓 Voltage	尺寸 Size	重量 Weight (g)
25	CT-Q2GS25	240	1	25
32	CT-Q2GS32			
35	CT-Q2GS35			
50	CT-Q2GS50			
63	CT-Q2GS63			
80	CT-Q2GS80			
100	CT-Q2GS100			
125	CT-Q2GS125			
160	CT-Q2GS160			
35	CT-Q6GS35	690	2	33.5
40	CT-Q6GS40			
45	CT-Q6GS45			
50	CT-Q6GS50			
63	CT-Q6GS63			
71	CT-Q6GS71			
80	CT-Q6GS80			
90	CT-Q6GS90			
100	CT-Q6GS100			
125	CT-Q6GS125			
160	CT-Q2GM160	240	3	24
200	CT-Q2GM200			
250	CT-Q2GM250			
315	CT-Q2GM315			
355	CT-Q2GM355			
400	CT-Q2GM400			
450	CT-Q2GM450			
180	CT-Q6GM180			
200	CT-Q6GM200			
225	CT-Q6GM225			
250	CT-Q6GM250			
280	CT-Q6GM280			
315	CT-Q6GM315			
350	CT-Q6GM350			

Size	A	B	C	D	E	F	H	ød
1	27.5	42	53	16.5	12.5	2	17.5	6.5x9
2	48	62	77	16.5	12.5	2	18	6.5x9
3	31	59	84	38	25.5	2.8	41	13.5
4	46	79	108	38	25.5	2.8	41	13.5

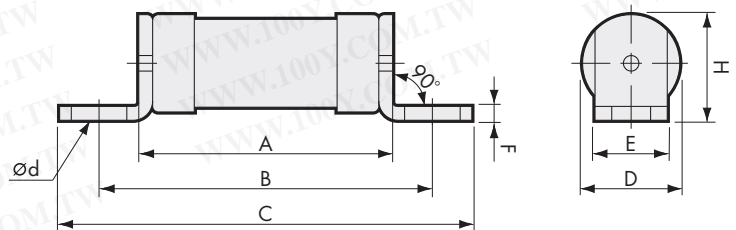

Unit: mm

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)