


# LOW-PEAK® Dual-Element Time-Delay Fuses Class J – 600 Volt

# LPJ\_SPI 6-60 Amps

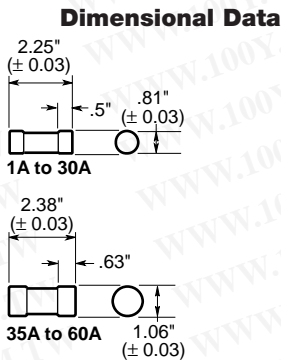

**Catalog Symbol:** LPJ\_SPI

Dual-Element, Time-Delay – 10 seconds (minimum) at 500% rated current

Current-Limiting

**Ampere Rating:** 6 to 60A

**Voltage Rating:** 600Vac (or less)  
300Vdc (or less): 35-60A

**Interrupting Rating:** 300,000A RMS Sym. (UL)  
100,000A dc

**Agency Information:**

UL Listed — Special Purpose\*, Guide JFHR, File E56412  
CSA Certified, 200,000 AIR, Class J per CSA 22.2 No. 248.8  
Class 1422-02, File 53787

\*Meets all performance requirements of UL Standard 248-8 for Class J fuses.

**Catalog Symbol and Ampere Ratings**

LPJ-6SPI	LPJ-10SPI	LPJ-20SPI	LPJ-40SPI
LPJ-7SPI	LPJ-12SPI	LPJ-25SPI	LPJ-45SPI
LPJ-8SPI	LPJ-15SPI	LPJ-30SPI	LPJ-50SPI
LPJ-9SPI	LPJ-17½SPI	LPJ-35SPI	LPJ-60SPI

**Carton Quantity and Weight**


Ampere Ratings	Carton Qty.	Weight**	
		Lbs.	Kg.
6-30	10	1.09	0.494
35-60	10	1.78	0.808

\*\*Weight per carton.

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.


**General Information:**

- Permanent fuse Indication.
- True dual-element fuses with a minimum 10 second time-delay at 500% overload.
- Long time-delay minimizes needless fuse openings due to temporary overloads and transient surges.
- Can often be sized for back-up protection against motor burnout from overload or single-phasing if other overload protective devices fail.
- High interrupting rating to safely interrupt overcurrents up to 300,000A.
- High degree of current limitation due to the fast speed-of-response to short-circuits.
- Faster response to damaging short-circuit currents than mechanical overcurrent protective devices.
- Reduces let-through thermal and magnetic forces in order to protect low withstand rated components.
- Proper sizing provides “no damage” Type “2” coordinated protection for NEMA and IEC motor control in accordance with IEC Standard 947-4-1.
- Dual-element fuses have lower resistance than ordinary fuses so they run cooler.
- Lower watts loss reduces power consumption.
- Unique dimensions assure that another class of fuse with a lesser voltage rating, interrupting rating or current-limiting ability cannot be substituted.
- Space-saving package for equipment down sizing.



**Recommended fuseblocks/fuseholders for Class J 600V fuses**  
**See Data Sheets listed below**

- Finger-safe fuseholders - 1152
- Open fuseblocks - 1114
- Open pyramid fuseblocks - 1108



**For non-indicating version, the LPJ\_SP is available. See Data Sheet: 1006**


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw

# LOW-PEAK® Dual-Element Time-Delay Fuses Class J – 600 Volt

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## LPJ\_SPI 6-60 Amps

Time-Current Characteristic Curves—Average Melt

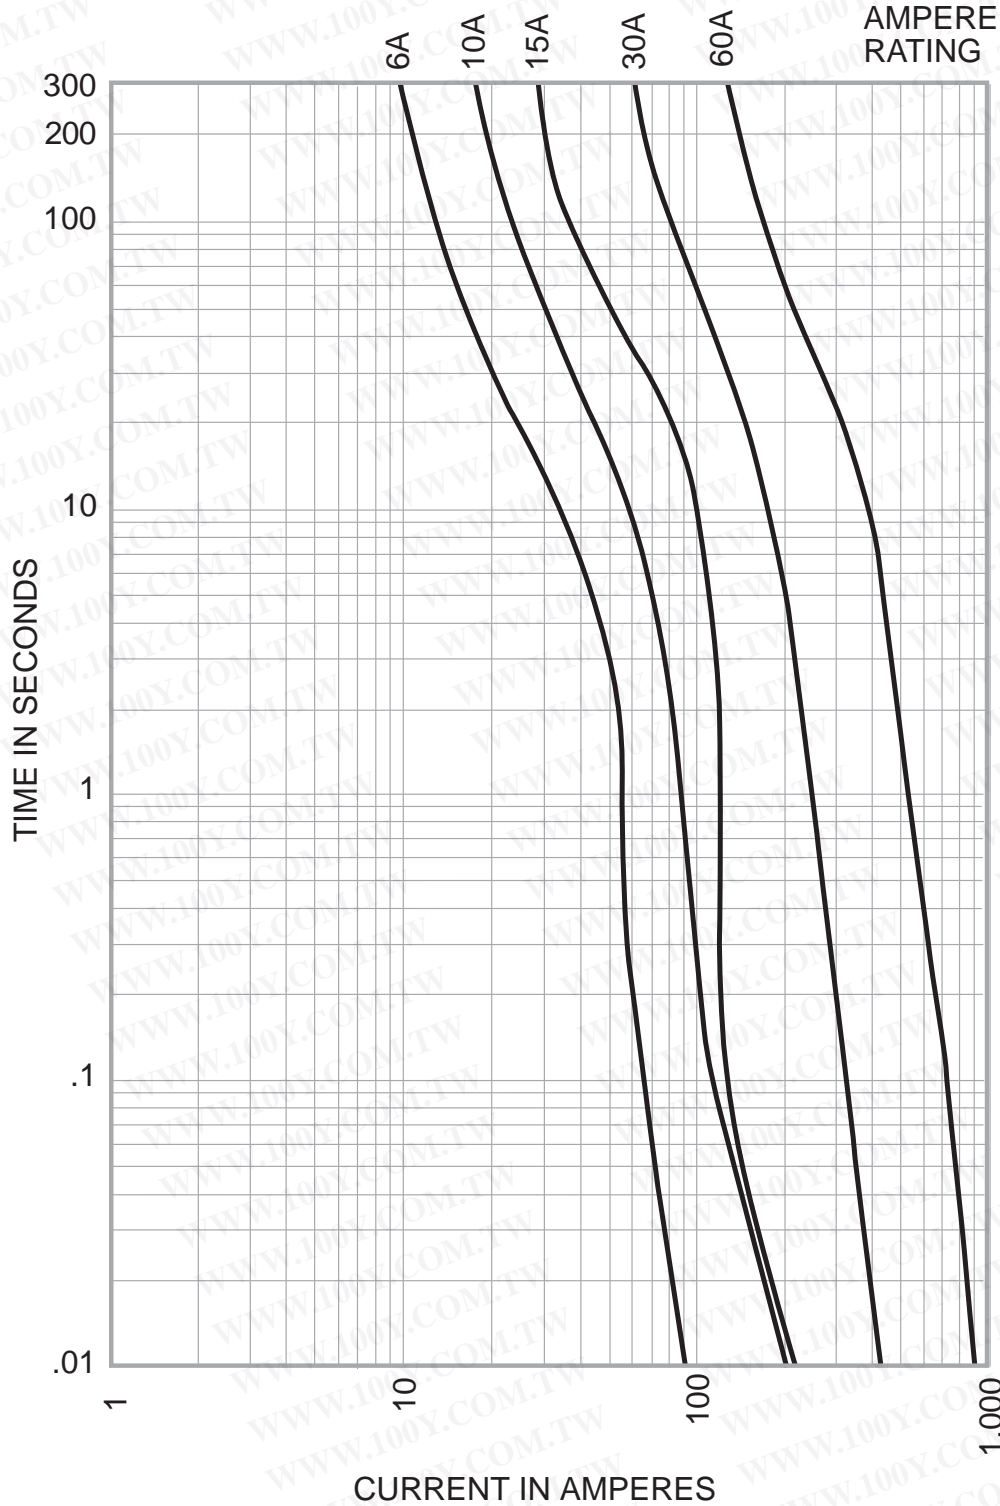


**LOW-PEAK®**  
**Dual-Element Time-Delay Fuses**  
**Class J – 600 Volt**

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**LPJ\_SPI**  
**6-60 Amps**

**Current Limitation Curves**

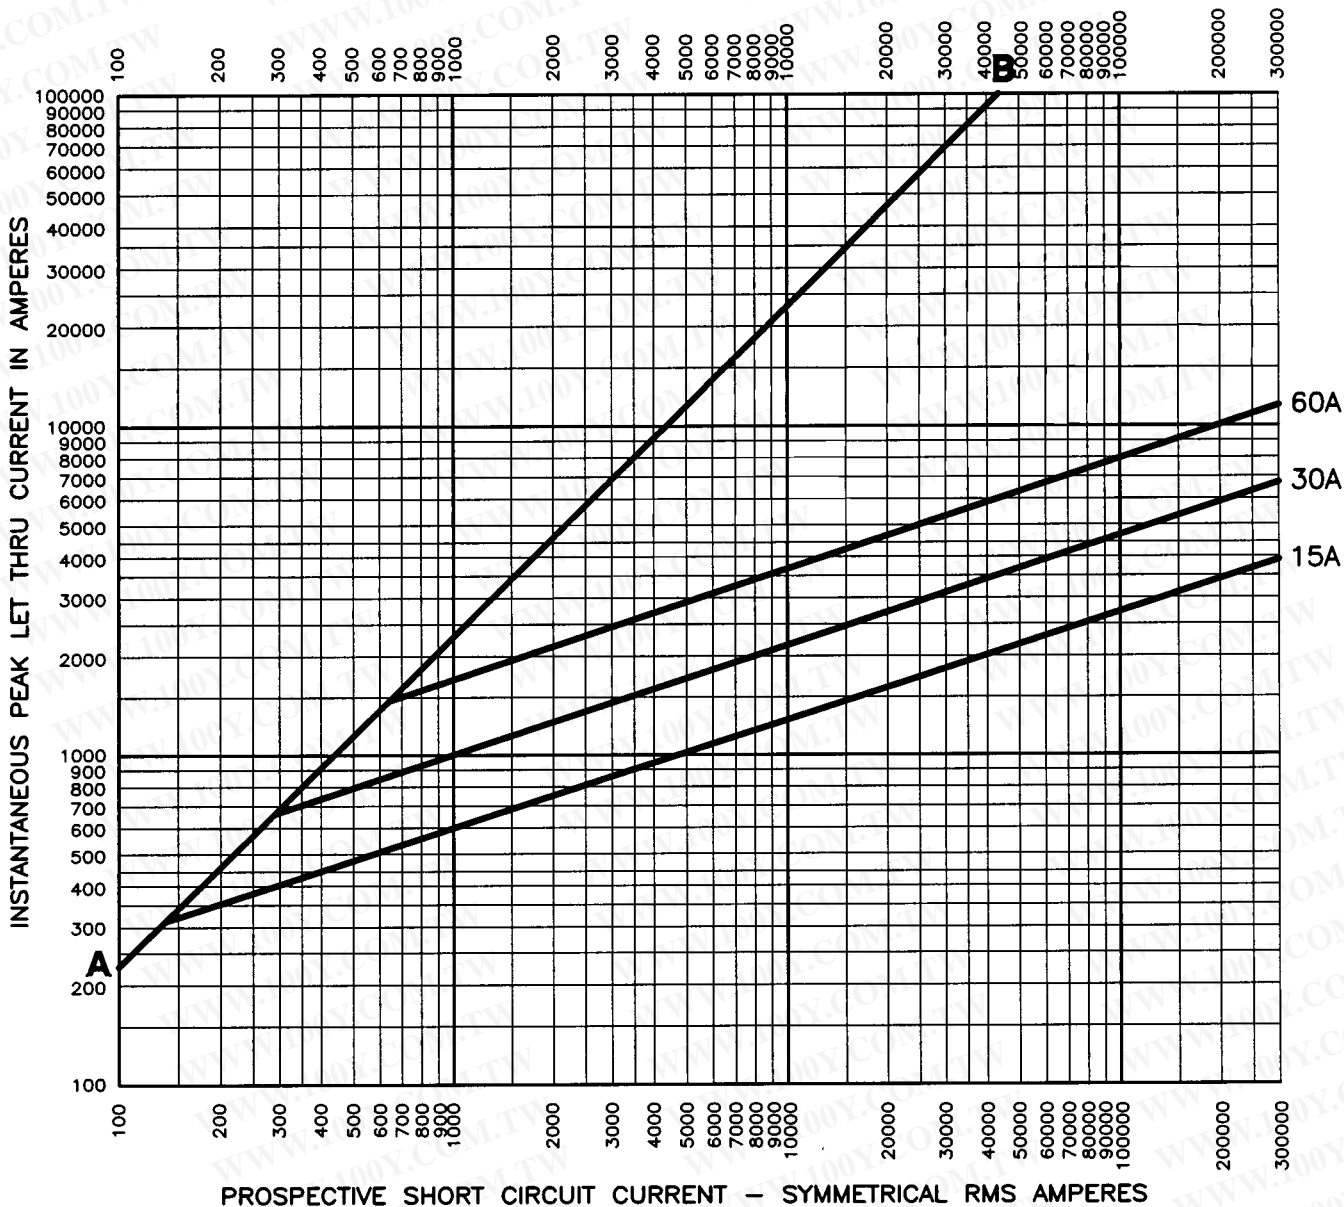

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

# LOW-PEAK®

## Dual-Element, Time-Delay Fuses

### Class J – 600 Volt

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# LPJ\_SPI

## 70 to 600A



**Catalog Symbol:** LPJ\_SPI

Dual-Element, Time-Delay – 10 seconds (minimum) at 500% rated current

**Current-Limiting**

**Ampere Rating:** 70 to 600A

**Voltage Rating:**

ac: 600V (or less)

dc: 300V (or less)

**Interrupting Rating:**

ac: 300,000A RMS Sym.

dc: 100,000A

**Agency Information:**

UL Listed – Special Purpose†, Guide JFHR, File E56412

CSA Certified, Class J per CSA C22.2 No. 248.8,

Class 1422-02, File 53787

†Meets all performance requirements of UL Standard 248-8 for Class J fuses.


#### Catalog Symbol and Ampere Ratings

LPJ-70SPI	LPJ-125SPI	LPJ-250SPI	LPJ-500SPI
LPJ-80SPI	LPJ-150SPI	LPJ-300SPI	LPJ-600SPI
LPJ-90SPI	LPJ-175SPI	LPJ-350SPI	—
LPJ-100SPI	LPJ-200SPI	LPJ-400SPI	—
LPJ-110SPI	LPJ-225SPI	LPJ-450SPI	—

#### Carton Quantity and Weight

Ampere Ratings	Carton Qty.	Weight*	
		Lbs.	Kg.
70–100	5	1.69	0.767
110–200	5	4.21	1.910
225–400	1	1.67	0.758
450–600	1	2.80	1.270

\*Weight per carton.




**Recommended fuseblocks for Class J 600V fuses**  
 See Data Sheet: 1114




**For non-indicating version, the LPJ\_SPI is available. See Data Sheet: 1007.**


#### Dimensional Data




70A to 100A

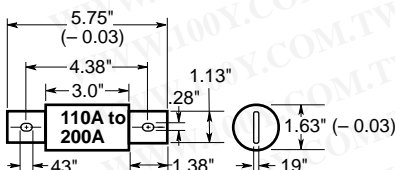

225A to 400A

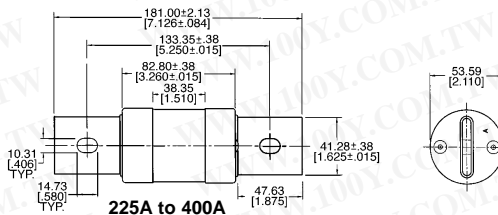

450A to 600A

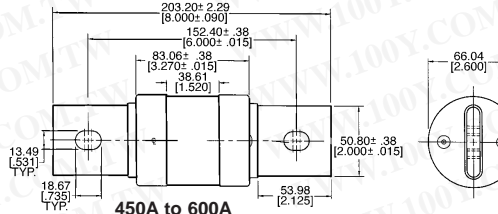


#### General Information:

- Permanent replacement fuse indication.
- True dual-element fuses with a minimum 10 second time-delay at 500% overload.
- Long time-delay minimizes needless fuse openings due to temporary overloads and transient surges.
- Can often be sized for back-up protection against motor burnout from overload or single-phasing if other overload protective devices fail.
- High interrupting rating to safely interrupt overcurrents up to 300,000A.
- High degree of current-limitation due to the fast speed-of-response to short-circuits.
- Faster response to damaging short-circuit currents than mechanical overcurrent protective devices.
- Reduces let-through thermal and magnetic forces in order to protect low withstand rated components.
- Proper sizing provides “no damage” Type “2” coordinated protection for NEMA and IEC motor control in accordance with IEC Standard 947-4-1.
- Dual-element fuses have lower resistance than ordinary fuses, hence they run cooler.
- Lower watts loss reduces power consumption.
- Unique dimensions assure that another class of fuse with a lesser voltage rating, interrupting rating or current-limiting ability cannot be substituted.
- Space-saving package for equipment down sizing.

# LOW-PEAK® Dual-Element, Time-Delay Fuses Class J - 600 Volt

## LPJ\_SPI 70-600A

Time-Current Characteristic Curves—Average Melt

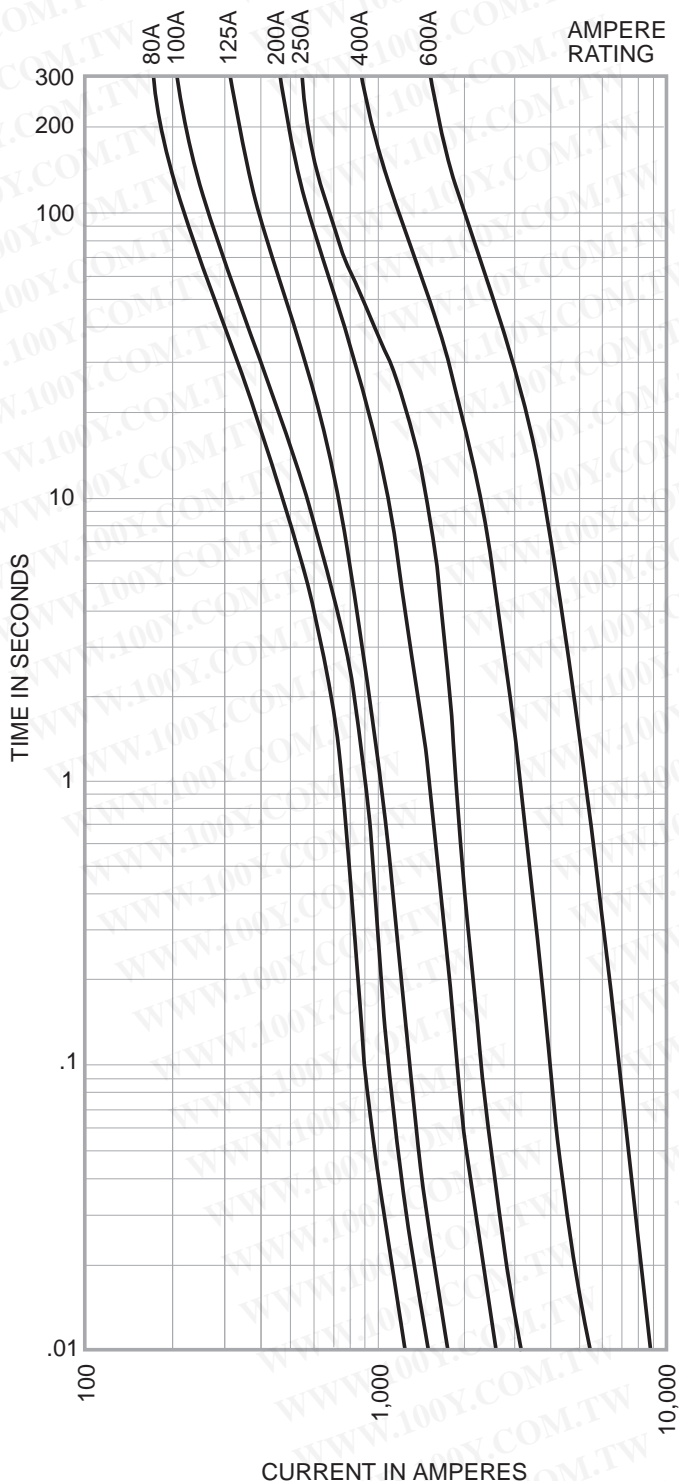


勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**LOW-PEAK®**  
**Dual-Element, Time-Delay Fuses**  
**Class J - 600 Volt**

**LPJ\_SPI**  
**70-600A**

**Current-Limitation Curves**

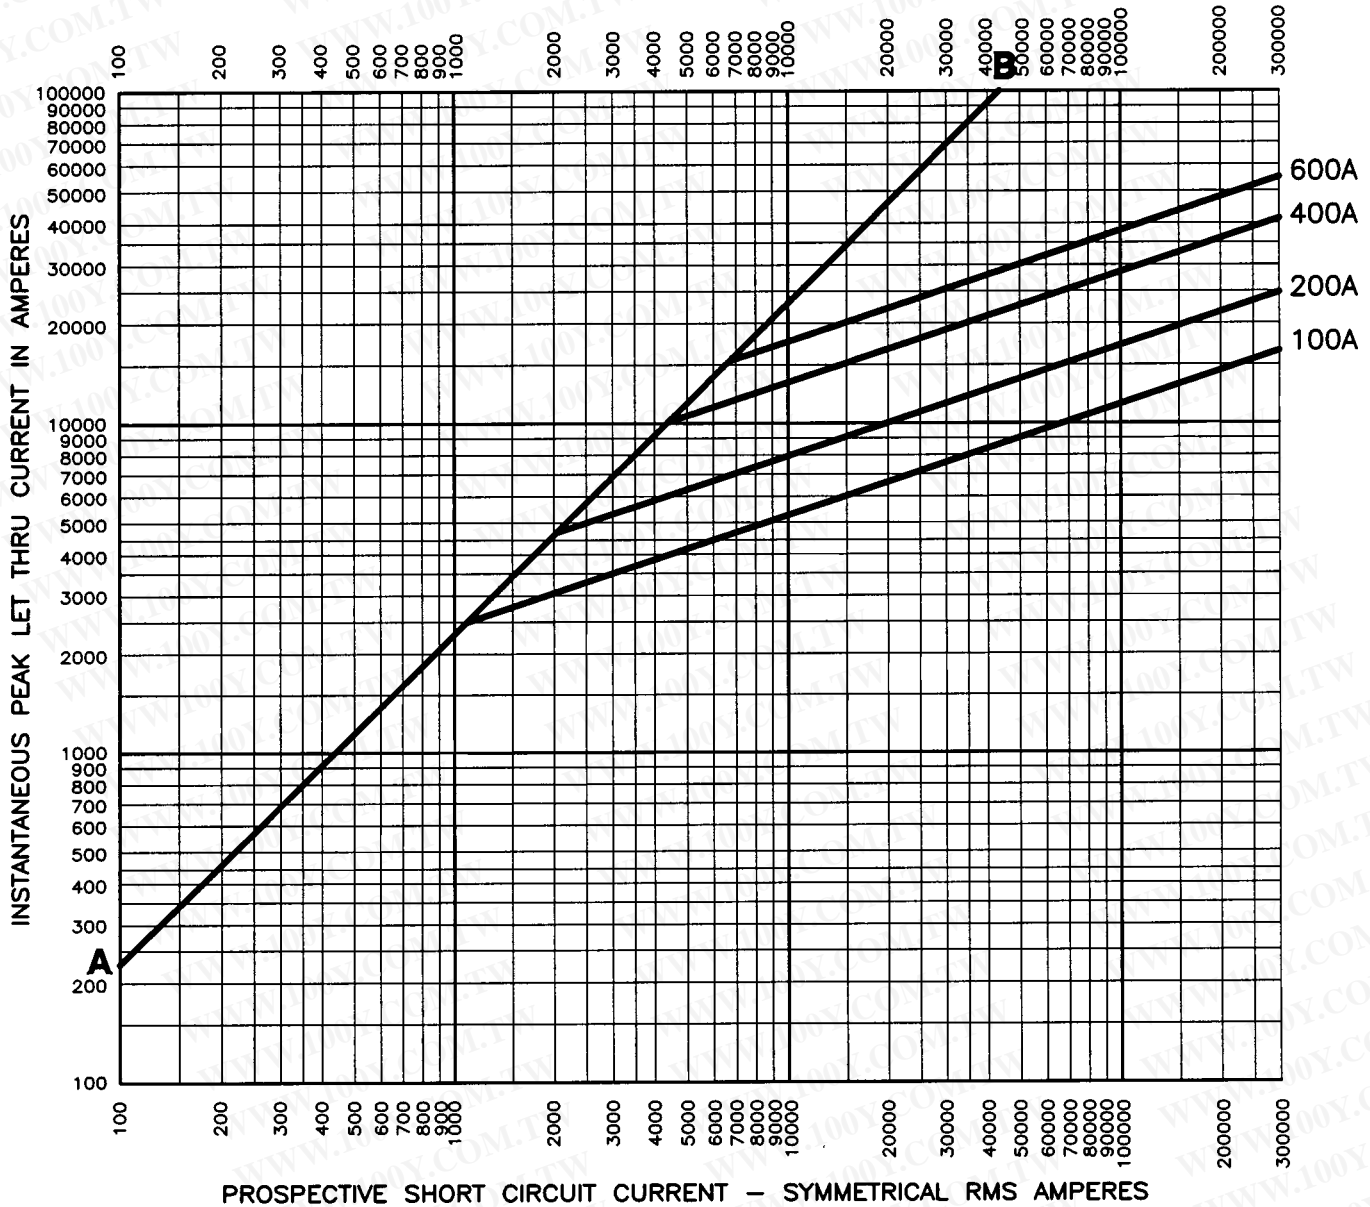

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.