

RT18 Fuse

Standard: IEC 60269

Function

RT18 fuse provide:

- Protection of circuits against overload current
- Protection of circuits against short-circuit current

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Order Information



Cylindrical Fuse	Rate current In(A)	Weight(g)	Reference
RT18-32	2	8	RT1810382
	4		RT1810384
	6		RT1810386
	8		RT1810388
	10		RT18103810
	12		RT18103812
	16		RT18103816
	20		RT18103820
	25		RT18103825
	32		RT18103832
	RT18-63		2
4		RT1814514	
6		RT1814516	
8		RT1814518	
10		RT18145110	
12		RT18145112	
16		RT18145116	
20		RT18145120	
25		RT18145125	
32		RT18145132	
40		RT18145140	
50		RT18145150	
63		RT18145163	

RT18 Fuse

Standard: IEC 60269

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Order Information



Holder of fuse	Pole	Rate current In(A)	Note	Weight (g)	Reference
RT18-32X	1P	32	Material:Resin	82	RT1832ZXB
	2P		With Indicator		RT1832Z2XB
	3P				RT1832Z3XB
RT18-32	1P	32	Material:Resin	82	RT1832ZB
	2P		Without Indicator		RT1832Z2B
	3P				RT1832Z3B
RT18-32X	1P	32	Material:Nylon	82	RT1832ZX
	2P		With Indicator		RT1832Z2X
	3P				RT1832Z3X
RT18-32	1P	32	Material:Nylon	82	RT1832Z
	2P		Without Indicator		RT1832Z2
	3P				RT1832Z3
RT18-63X	1P	63	Material:Resin	206	RT1863ZXB
	2P		With Indicator		RT1863Z2XB
	3P				RT1863Z3XB
RT18-63	1P	63	Material:Resin	206	RT1863ZB
	2P		Without Indicator		RT1863Z2B
	3P				RT1863Z3B

Technical Data

Rated working current	2-63A
Rated operation voltage	380V
Rated breaking capacity	100KA


RT18 Fuse

Standard: IEC 60269

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Overall Dimensions

Unit: mm

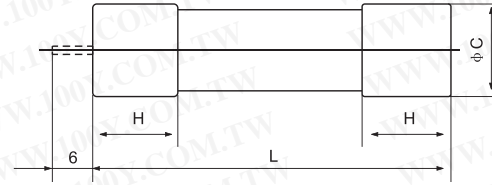

Cylindrical Fuse

Type	Size	L	C	Hmax
RT18-32	10×38	38±0.6	10.3±0.1	10.5
RT18-63	14×51	51 ^{+0.6} _{-1.0}	14.3±0.1	13.8

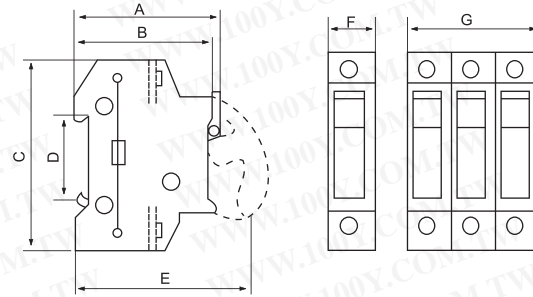

Holder of fuse

Type	A	B	C	D	E	F	G
RT18-32	63	60	79	35	80	18	54
RT18-63	78	76	103	35	110	25	75