
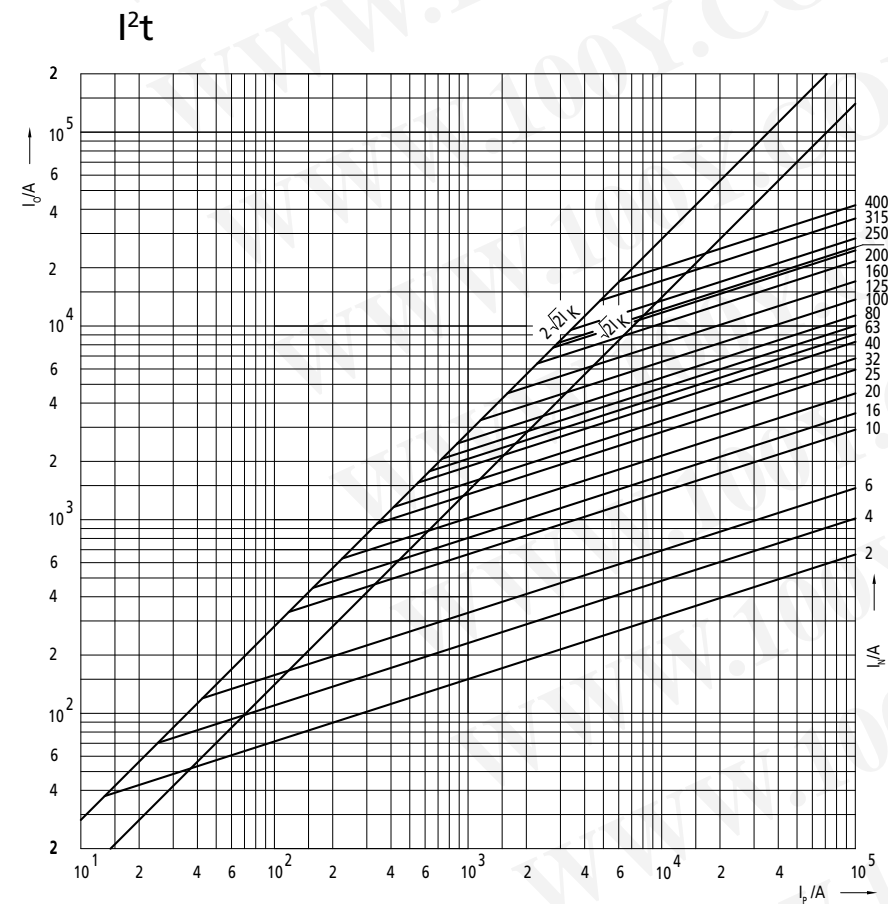


● **Talilne karakteristike / Rastalne karakteristike / Melting characteristics** gL-gG


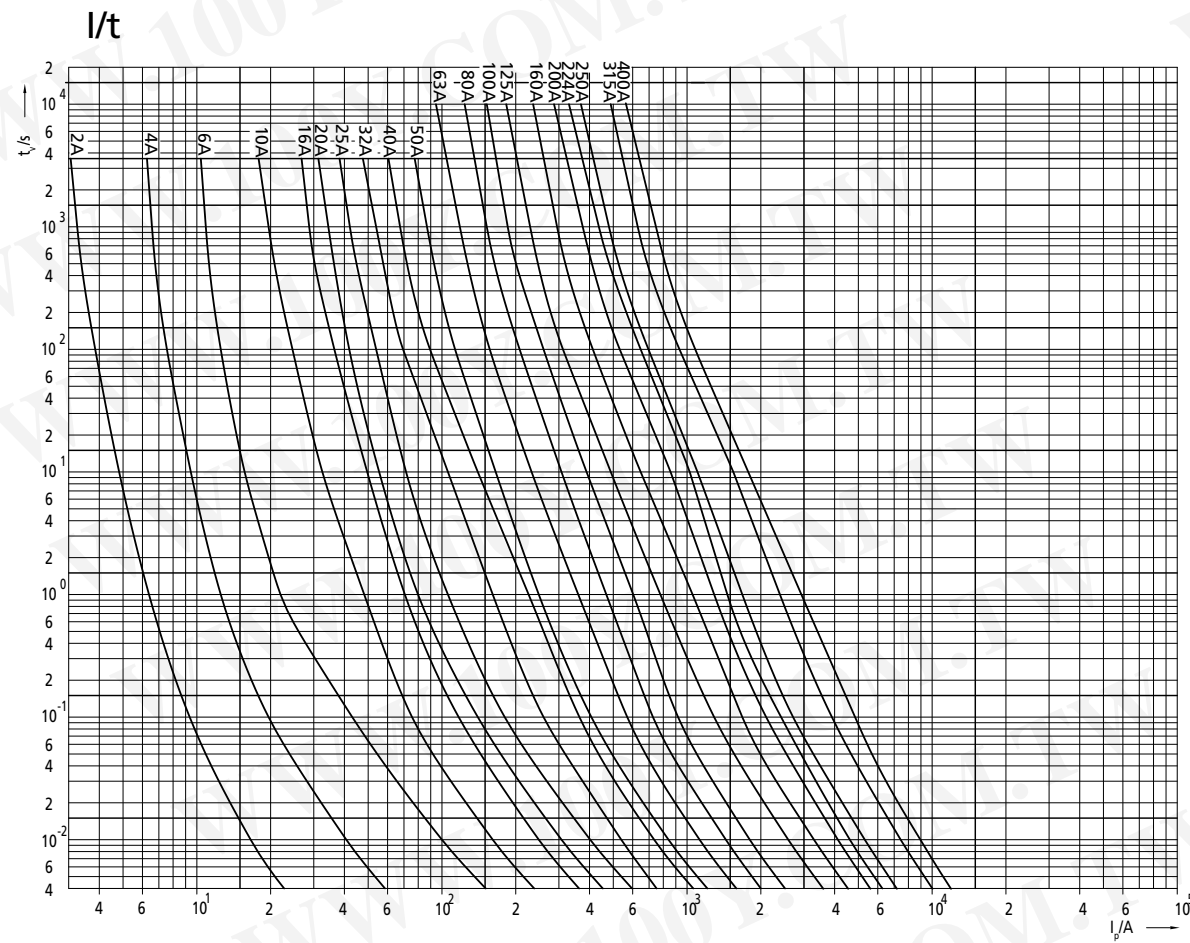


Tehnični podatki / Tehnički podaci / Technical data

Nazivna napetost U_n / Nazivni napon U_n / Rated voltage U_n	400V a.c., 500V a.c., 690V a.c.
Nazivni tok I_n / Nazivna struja I_n / Rated current I_n	2 - 400A
Nazivna izklopna zmogljivost / Nazivna izklopna moč / Breaking capacity	120kA
Talilna karakteristika / Rastalna karakteristika / Melting characteristic	gL-gG, aM*
Certificirani po / Certificirani prema / Certified according to	IEC 60269-1 Ed. 3.0:1998+Corr.1:2000+A1:2005 / EN 60269-1:1998+A1:2005 IEC 60269-2 Ed. 2.0:1986+Corr.1:1996+A1:1995+A2:2001 / EN 60269-2:1995+A1:1998+A2:2002 IEC 60269-2-1 Ed. 4.0:2004 / HD 630.2.1 S6:2003
Dimenzije ustrezajo standardu / Dimenzije odgovaraju standardu / Dimensions comply with the standard	DIN 43620 Teil 1 - 4
Dve izvedbi pokrovov / Dvije izvedbe poklopaca / Two versions of covers	Aluminjasti, plastični z izoliranim rogljem / aluminjski, plastični sa izoliranim zubcem / aluminium, plastic with insulated removal tag
* Vse velikosti v KOMBI izvedbi z izjemo 1 C, so dobavljive tudi z aM karakteristiko. / Sve veličine u KOMBI izvedbi osim 1 C, su dobavljive sa aM karakteristikom. / All sizes in KOMBI version except 1 C are available with aM characteristics.	

Dimenzije / Dimenzije / Dimensions

(mm)

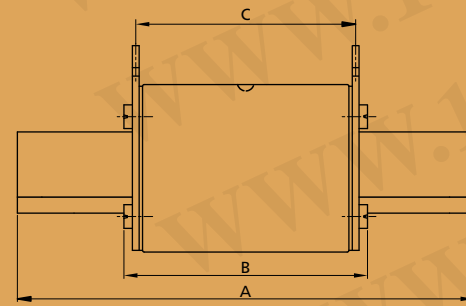


Type	A	B	C	D	E	F	G	H
00 C	79	53	49,5	35	15	21	52	7,5
00	79	53	49,5	35	15	28	55	11,5
0	125	68	62	35	15	28	55	11,5
1 C	135	68	62	40	15	28	61	11,5
1	135	72	65	40	20	46	65	14
2 C	150	72	65	48	20	46	65	14
2	150	72	65	48	26	54	73	14

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

Novo! New!

● **NV/NH KOMBI**

TALILNI VLOŽEK Z DVOJNO INDIKACIJO
 RASTALNI ULOŽAK S DVOSTRUKOM INDIKACIJOM
 FUSE-LINK WITH DUAL INDICATION

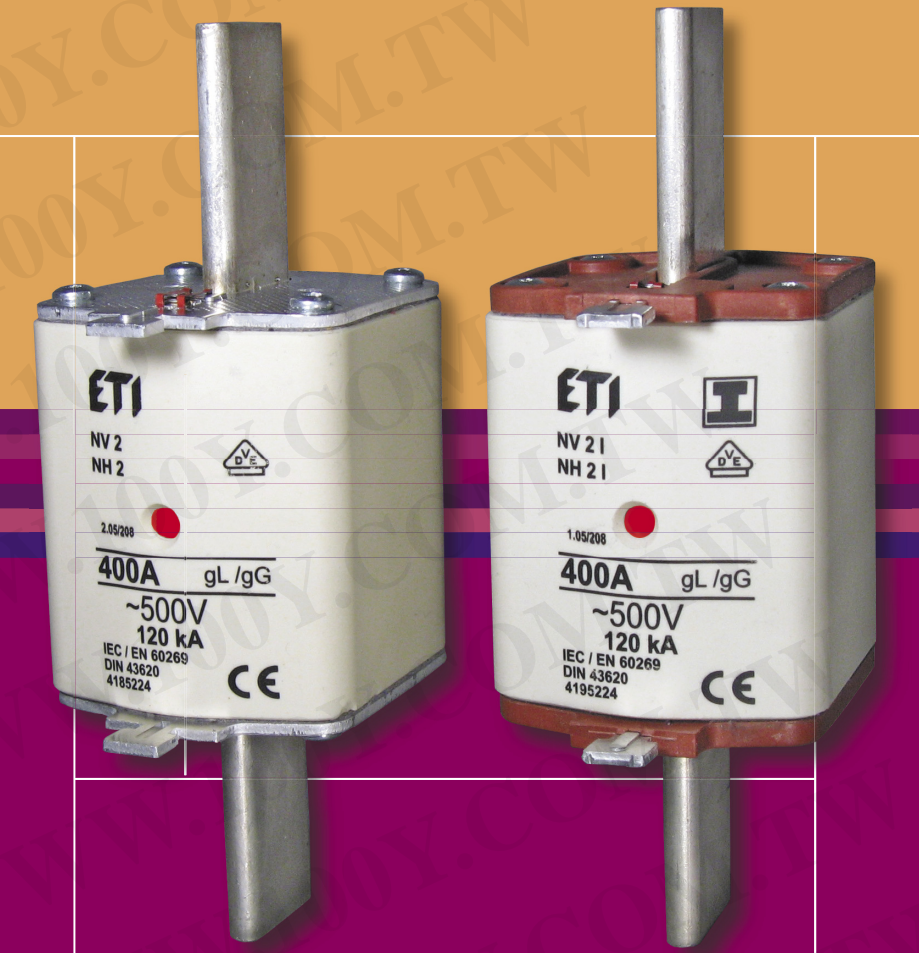

ETI Elektroelement d.d.
 Obrezija 5, SI - 1411 Izlake
 Slovenija
 Tel. + 386 03 56 57 570
 Faks + 386 03 56 74 077
 eti@eti.si

Talilni vložek NV 2-400A KOMBI - zanesljiva kombinacija zgornjega in središnjega indikatorja

Rastalni uložak NV 2-400A KOMBI - pouzdana kombinacija gornjeg i središnjeg indikatora

Knife-blade NV/NH fuse-link 2-400A KOMBI - a reliable combination of top and center indicator

dvojna indikacija / dvostruka indikacija / dual indication

PREDNOSTI

ETI predstavlja novo serijo NV talilnih vložkov, ki bo nadomestila obstoječo serijo NV nizkonapetostnih talilnih vložkov. Najpomembnejša lastnost nove serije je dvojna indikacija pregoretega, ki jo imenujemo **KOMBI** (kombinirana). Le-ta na zelo zanesljiv način povezuje t.i. **zgornjo indikacijo** (klasična pozicija indikatorja pregoretega na zgornjem pokrovu) in **srednjo indikacijo** (pozicija indikatorja na sredini keramičnega telesa). Uporabljena izvedba indikatorskega mehanizma je zelo napredna in zagotavlja dobro vidnost indikatorja v vseh aplikacijah talilnega vložka – podnožja, izolirane varovalčne letve in stikalne letve.

Najpomembnejše prednosti NV KOMBI talilnih vložkov:

- Dimenzije ustrezajo standardu DIN 43620 Teil 1 - 4
- Visoka izklopna zmogljivost
- Tri različne nazivne napetosti: 400V a.c., 500V a.c. in 690V a.c.
- Dve izvedbi pokrovov: aluminijast, ko je roglj pod napetostjo in izoliran kovinski roglj vgrajen v pokrov iz plastične mase
- Kombiniran indikator pregoretega, ki zagotavlja dvojno indikacijo: na vrhnjem pokrovu in v sredini keramičnega telesa

PRIJEDNOSTI

ETI predstavlja novo serijo NV rastalnih uložakov, koji će nadomjestiti postojeću seriju NV niskonaponskih rastalnih uložaka. Najvažnija osobina nove serije je dvostruka indikacija pregorevanja, koju nazivamo **KOMBI** (kombiniranom). Nova serija na veoma pouzdan način združuje **gornju indikaciju** (klasična pozicija indikatora na gornjem poklopcu) i **srednju indikaciju** (pozicija indikatora u sredini keramičkog osnova). Upotrijebljena izvedba indikatorskog mehanizma je veoma naprijedna i garantuje dobru vidljivost indikatora u svim aplikacijama ugradnje rastalnih uložaka – osnove, izolirane letve i kontaktne letve (osigurač-rastavna sklopka).

Najvažnije prijednosti NV KOMBI rastalnih uložaka:

- Dimenzije odgovaraju standardu DIN 43620 Teil 1 - 4
- Visoka isklopna moć
- Tri različita nazivna napona: 400V a.c., 500V a.c. i 690V a.c.
- Dvije izvedbe poklopaca: aluminijanski, kad je zubac pod naponom i izolirani metalni zubac ugrađen u plastični poklopac
- Kombinirani indikator pregorevanja, koji garantira dvostruku indikaciju: na gornjem poklopcu i u sredini keramičke osnove.

ADVANTAGES

ETI introduces a new series of NV/NH low voltage knife-blade fuse-links, which will replace the existing series of NV/NH fuse-links. The most important characteristic of new series is dual indication, named **KOMBI** (combined), which in a very reliable combines the so-called **top indication** (traditional position of indicator on the top cover) and **center indication** (position of indicator in the center of ceramic body). The used version of the indicator mechanism is very advance and ensures good indicator visibility in all different applications of the fuse – fuse bases, strip-fuseways and strip-type fuse switch-disconnectors.

The most important advantages of NV/NH KOMBI fuse-links:

- Dimensions comply with the standard DIN 43620 Teil 1 - 4
- High breaking capacity
- Three available rated voltages: 400V a.c., 500V a.c. i 690V a.c.
- Two versions of covers: aluminium, when the removal tag is under voltage and plastic, when insulated metal removal tag is incorporated into the plastic cover
- Combined indicator, ensuring dual indication: on the top cover and in the center of ceramic body

dobra vidnost indikatorja v vseh aplikacijah talilnega vložka - podnožja, izolirane varovalčne letve, stikalne letve /

dobra vidljivost indikatora u svim aplikacijama ugradnje rastalnih uložaka - osnove, izolirane letve i kontaktne letve (osigurač-rastavna sklopka) /

good indicator visibility in all different applications of the fuse - fuse bases, strip-fuseways and strip-type fuse switch-disconnectors

Podatki za naročanje / Podaci za narudžbu / Order information

I _n [A]	NV/NH 00 C KOMBI gL-gG			NV/NH 00 CI KOMBI gL-gG		
	~ 400V Šifra/ No Code	~ 500V Šifra/ No Code	~ 690V Šifra/ No Code	~ 400V Šifra/ No Code	~ 500V Šifra/ No Code	~ 690V Šifra/ No Code
2	4181101	4181201	4181301	4191101	4191201	4191301
4	4181102	4181202	4181302	4191102	4191202	4191302
6	4181103	4181203	4181303	4191103	4191203	4191303
10	4181104	4181204	4181304	4191104	4191204	4191304
16	4181105	4181205	4181305	4191105	4191205	4191305
20	4181106	4181206	4181306	4191106	4191206	4191306
25	4181107	4181207	4181307	4191107	4191207	4191307
32	4181108	4181208	4181308	4191108	4191208	4191308
35	4181109	4181209	4181309	4191109	4191209	4191309
40	4181110	4181210	4181310	4191110	4191210	4191310
50	4181111	4181211	4181311	4191111	4191211	4191311
63	4181112	4181212		4191112	4191212	
80	4181113	4181213		4191113	4191213	
100	4181114	4181214		4191114	4191214	

Pakiranje / Pakiranje / Packaging: 3 / 120

I _n [A]	NV/NH 00 KOMBI gL-gG		
	~ 400V Šifra/ No Code	~ 500V Šifra/ No Code	~ 690V Šifra/ No Code
63			4182312
80			4182313
100			4182314
125	4182115	4182215	4182315
160	4182116	4182216	

Pakiranje / Pakiranje / Packaging: 3 / 90

I _n [A]	NV/NH 1 C KOMBI gL-gG		NV/NH 1 CI KOMBI gL-gG	
	~ 500V Šifra/ No Code	~ 690V Šifra/ No Code	~ 500V Šifra/ No Code	~ 690V Šifra/ No Code
25	4184207	4184307	4194207	4194307
32	4184208	4184308	4194208	4194308
35	4184209	4184309	4194209	4194309
40	4184210	4184310	4194210	4194310
50	4184211	4184311	4194211	4194311
63	4184212	4184312	4194212	4194312
80	4184213	4184313	4194213	4194313
100	4184214	4184314	4194214	4194314
125	4184215	4184315	4194215	4194315
160	4184216		4194216	

Pakiranje / Pakiranje / Packaging: 3 / 45

I _n [A]	NV/NH 0 KOMBI gL-gG	
	~ 500V Šifra/ No Code	~ 690V Šifra/ No Code
6	4183203	4183303
10	4183204	4183304
16	4183205	4183305
20	4183206	4183306
25	4183207	4183307
32	4183208	4183308
35	4183209	4183309
40	4183210	4183310
50	4183211	4183311
63	4183212	4183312
80	4183213	4183313
100	4183214	4183314
125	4183215	4183315
160	4183216	

Pakiranje / Pakiranje / Packaging: 3 / 45

I _n [A]	NV/NH 1 KOMBI gL-gG			NV/NH 1 I KOMBI gL-gG		
	~ 400 V Šifra/ No Code	~ 500 V Šifra/ No Code	~ 690 V Šifra/ No Code	~ 400 V Šifra/ No Code	~ 500 V Šifra/ No Code	~ 690 V Šifra/ No Code
63	4184120	4184220	4184320	4194120	4194220	4194320
80	4184121	4184221	4184321	4194121	4194221	4194321
100	4184122	4184222	4184322	4194122	4194222	4194322
125	4184123	4184223	4184323	4194123	4194223	4194323
160	4184124	4184224	4184324	4194124	4194224	4194324
200	4184117	4184217	4184317	4194117	4194217	4194317
224	4184118	4184218	4184318	4194118	4194218	4194318
250	4184119	4184219	4184319	4194119	4194219	4194319

Pakiranje / Pakiranje / Packaging: 3 / 24

I _n [A]	NV/NH 2 C KOMBI gL-gG			NV/NH 2 CI KOMBI gL-gG		
	~ 400 V Šifra/ No Code	~ 500 V Šifra/ No Code	~ 690 V Šifra/ No Code	~ 400 V Šifra/ No Code	~ 500 V Šifra/ No Code	~ 690 V Šifra/ No Code
63	4185112	4185212	4185312	4195112	4195212	4195312
80	4185113	4185213	4185313	4195113	4195213	4195313
100	4185114	4185214	4185314	4195114	4195214	4195314
125	4185115	4185215	4185315	4195115	4195215	4195315
160	4185116	4185216	4185316	4195116	4195216	4195316
200	4185117	4185217	4185317	4195117	4195217	4195317
224	4185118	4185218	4185318	4195118	4195218	4195318
250	4185119	4185219	4185319	4195119	4195219	4195319

Pakiranje / Pakiranje / Packaging: 3 / 15

I _n [A]	NV/NH 2 KOMBI gL-gG			NV/NH 2 I KOMBI gL-gG		
	~ 400V Šifra/ No Code	~ 500V Šifra/ No Code	~ 690V Šifra/ No Code	~ 400V Šifra/ No Code	~ 500V Šifra/ No Code	~ 690V Šifra/ No Code
280	4185120	4185220	4185320	4195120	4195220	4195320
300	4185121	4185221	4185321	4195121	4195221	4195321
315	4185122	4185222	4185322	4195122	4195222	4195322
355	4185123	4185223		4195123	4195223	
400	4185124	4185224		4195124	4195224	

Pakiranje / Pakiranje / Packaging: 3 / 15

Velikosti NV 3 C in 3 v KOMBI izvedbi bosta dobavljivi v maju 2006.
Veličine NV 3 C i 3 v KOMBI izvedbi će biti dostupne u svibnju 2006.
Sizes NV/NH 3 C and 3 in KOMBI version will be available in May 2006.

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

