




**Limiter** Komponenten für Temperatur - Strom - Zeit

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Thermal Switch P8...- (sealed housing)

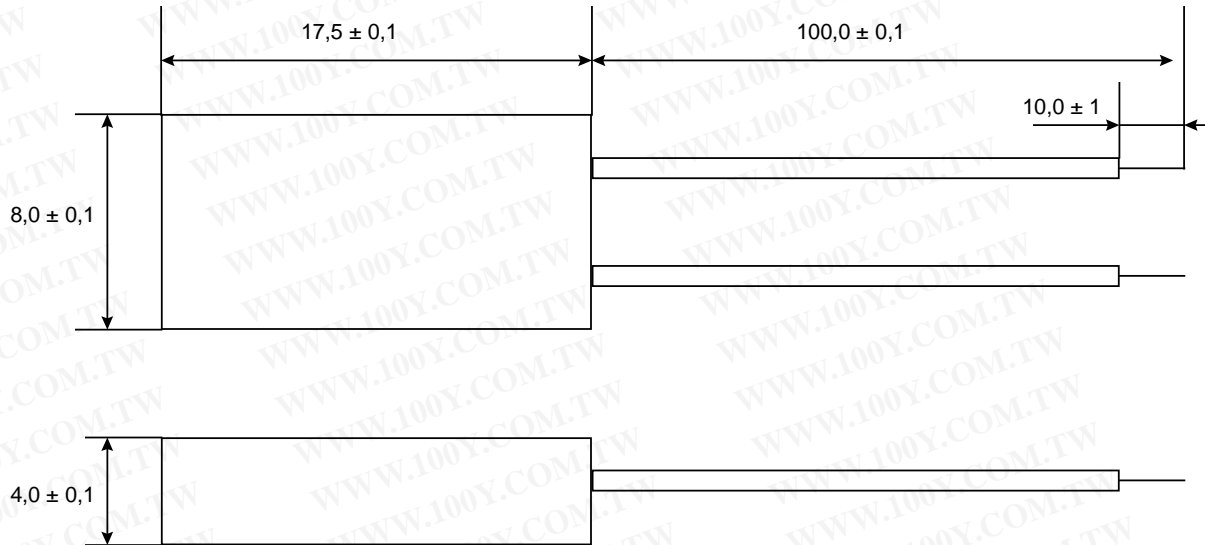


Connection type:

solder flags  
 insulated stranded tin plated wire  
 insulated solid wire  
 insulated stranded untinned wire

AWG 24  
 AWG 24 yellow  
 AWG 24

Circuit diagram:

normally closed

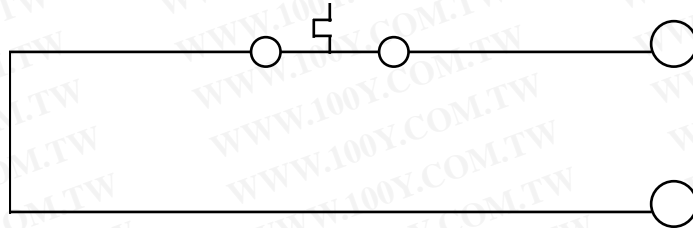

switching capacity:	250 V; 2,5 A (1,6) A/ 50Hz
min./ max. current:	50 mA/ 9,6 A (20 x )
temperature range:	50°C - 150°C
tolerance:	± 5 K oder ± 10 K
peak temperature:	160°C/ 200°C 1 Minute
approvals	VDE, UL

Additional wire length and/ or connections upon request.