


cylindrical cartridge fuses



cylindrical cartridge fuses (continued)

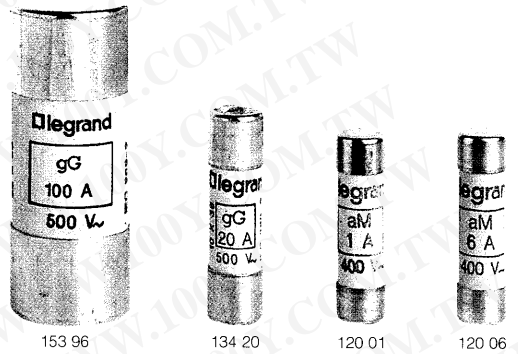

Pack Cat. Nos.

Miniature

HBC (high breaking capacity)
Conform to IEC 60127, VDE 0820-1

Sand filled, fast acting (type F)
For use with dimmers, terminal blocks and emergency lighting

Pack	Cat. Nos.	Rating (Amps)	Voltage~ (Volts)	Breaking capacity (Amps)
		5 x 20		
10	102 02	0.2	250	1 500
10	102 05	0.5		
10	102 06	0.63		
10	102 10	1		
10	102 12	1.25		
10	102 16	1.6		
10	102 20	2		
10/100	102 25	2.5		
10	102 30	3.15		
10	102 50	5		
10	102 63	6.3	250	500
10	102 96 ⁽¹⁾	10		

Dimensions (p. 162)

Cylindrical type gG

Conform to BS EN 60269-1, IEC 60269-1

Without indicator	With indicator	Rating (Amps)	Voltage~ (Volts)	Breaking capacity (Amps)		
		8.5 x 31.5				
10/100	123 01	1	400	20 000		
10/100	123 02	2				
10/100	123 04	4				
10/100	123 06	6				
10/100	123 08	8				
10/100	123 10	10				
10/100	123 12	12				
10/100	123 16	16				
10/100	133 32	32			400	20 000
10/100	134 32	32				

Neutral links

Pack	Cat. Nos.	Rating (Amps)
10/100	123 00	8.5 x 31.5
10/100	133 00	10 x 38
10/100	143 00	14 x 51
10/250	153 00	22 x 58

Note : Numbers refer to physical size of fuse i.e. 8.5 x 31.5 means Ø 8.5 mm x 31.5 mm length

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

(1) Overrating not described by standards

Pack Cat. Nos.

Dimensions (p. 162)

Type gG industrial

HBC (high breaking capacity)
Conform to BS EN 60269-1 and 2 (BS 88) IEC 60269-1, 2 and 2-1
Bureau Veritas approved

	Without indicator	With indicator	Rating (Amps)	Voltage~ (Volts)	Breaking capacity (Amps)		
			10 x 38				
10/100	133 94		0.5	500	100 000		
10/100	133 01		1				
10/100	133 02	134 02	2				
10/100	133 04	134 04	4				
10/100	133 06	134 06	6				
10/100	133 08	134 08	8				
10/100	133 10	134 10	10				
10/100	133 12	134 12	12				
10/100	133 16	134 16	16				
10/100	133 20	134 20	20				
10/100	133 25	134 25	25	500	100 000		
			14 x 51				
10/100	143 02		2				
10/600	143 04	145 04	4				
10/100	143 06	145 06	6				
10/100	143 10	145 10	10				
10/600	143 16	145 16	16				
10/600	143 20	145 20	20				
10/100	143 25	145 25	25				
10/100	143 32	145 32	32				
10/100	143 40	145 40	40				
10/100	143 50	145 50	50	500	100 000		
			22 x 58				
10/100	153 04		4				
10/250	153 06		6				
10	10/250	153 10	10				
10/250	153 16	155 16	16				
10/250	153 20	155 20	20				
10/250	153 25	155 25	25				
10/250	153 32	155 32	32				
10/250	153 40	155 40	40				
10/250	153 50	155 50	50				
10/250	153 63	155 63	63				
10/250	153 80	155 80	80				
10/250	153 96	155 96	100				
10	10/250	153 97	125	400			

Type aM (motor rated)

Conform to BS EN 60269-1 (BS 88) IEC 60269-1
Bureau Veritas approved

Pack	Cat. Nos.	Rating (Amps)	Voltage~ (Volts)	Breaking capacity (Amps)
		8.5 x 31.5		
10/100	120 01	1	400	20 000
10/100	120 02	2		
10/100	120 04	4		
10/100	120 06	6		
10/100	120 08	8		
10/100	120 10	10		