

Caps to Holder FUL (IP 67)



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

500 VAC · 4 W / 16 A (VDE) · 600 VAC/DC · 30 A (UL/CSA)



Standards

- IEC 60127-6
- UL 4248-1 / UL 512
- CSA 4248-1 / no. 39

Approvals

- VDE Certificate Number: 40010391
- UL File Number: E39328

References

Mating Cap to FUL

Weblinks


pdf-datasheet, html-datasheet, General Product Information, Packaging details, Approvals, CE declaration of conformity, RoHS, CHINA-RoHS, REACH, Distributor-Stock-Check, Detailed request for product

Technical Data

Fuse-Link	5 x 20 or 6.3 x 32mm
Rated Voltage	500VAC (VDE), 600VAC/DC (UL/CSA)
Rated current	16 A (VDE), 30 A (UL/CSA)
Rated Power Acceptance IEC	4 W / 16 A @ Ta 23°C
Degree of Protection	IP 67
Admissible Ambient Air Temp.	-40°C to 85°C
Material: Cap	Thermoset
Storage Conditions	0°C to 60°C, max. 70% r.h.
Product Marking	☐

Contact Resistance	< mΩ at 20 mV
--------------------	---------------

Dimension

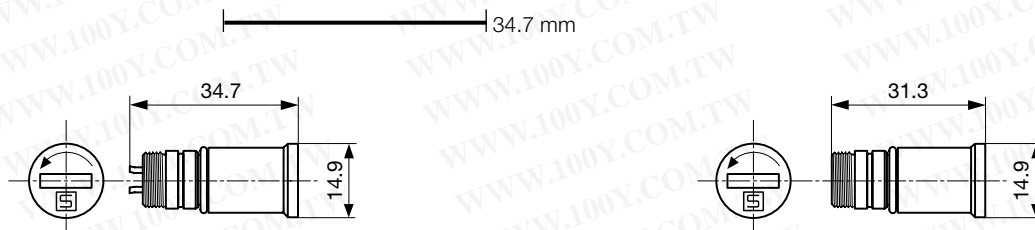

0031.2322

0031.2320

All Variants

Cap	Fuse-Link	Degree of Protection	Order Number
slotted	6.3 x 32mm	IP 67	0031.2320
slotted	5 x 20mm	IP 67	0031.2322

Most Popular.

Availability for all products can be searched real-time:<http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit

Plastic Bag (25 pcs.)