

14F-1Z-C2




Features :


- Rated voltage : 300VAC
- Rated current : 12A(per pole)
- Insulation voltage : >5KV
- Socket material : Flame reatardance-PA66+GF(V0)
- Contacts spring material : QSn6.5-0.1
- Hold down spring(on request) : Plastic

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

安裝尺寸 · Mounting Dimension

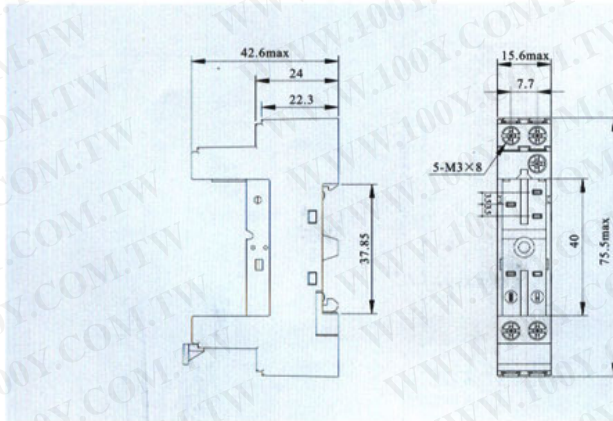

线路图 · Inter connection



14F-2Z-C2




Features :

- Rated voltage : 300VAC
- Rated current : 10A(per pole)
- Insulation voltage : >5KV
- Socket material : Flame reatardance-PA66+GF(V0)
- Contacts spring material : QSn6.5-0.1
- Hold down spring(on request) : Plastic
- Fixed card : 自带

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

安装尺寸 · Mounting Dimension

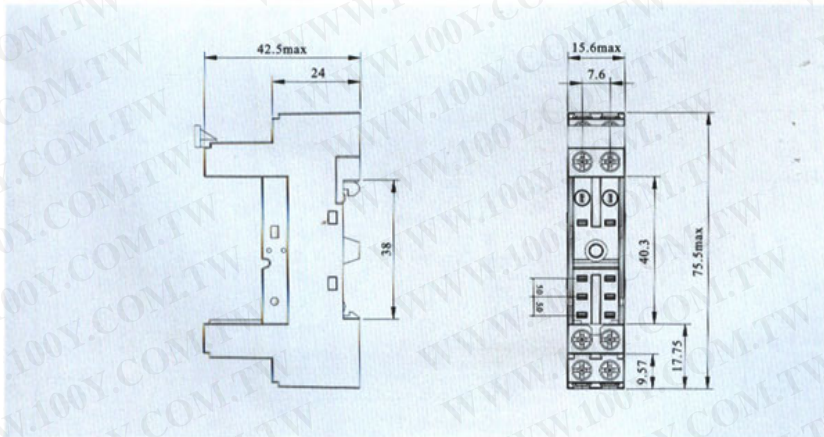

线路图 · Inter connection

