

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Bulletin PD-20266 rev.B 02/01

# International Rectifier

## 19TQ015 19TQ015S

SCHOTTKY RECTIFIER

19 Amp

$I_{F(AV)} = 19\text{Amp}$   
 $V_R = 15\text{V}$

### Major Ratings and Characteristics

Characteristics	19TQ015	Units
$I_{F(AV)}$ Rectangular waveform	19	A
$V_{RRM}$	15	V
$I_{FSM}$ @tp = 5 $\mu$ s sine	700	A
$V_F$ @19Apk, $T_J = 75^\circ\text{C}$	0.32	V
$T_J$ range	-55 to 125	$^\circ\text{C}$

### Description/Features

The 19TQ015 Schottky rectifier has been optimized for ultra low forward voltage drop specifically for the OR-ing of parallel power supplies. The proprietary barrier technology allows for reliable operation up to 125 $^\circ\text{C}$  junction temperature. Typical applications are in parallel switching power supplies, converters, reverse battery protection, and redundant power subsystems.

- 125 $^\circ\text{C}$   $T_J$  operation ( $V_R < 5\text{V}$ )
- Optimized for OR-ing applications
- Ultra low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance

### Case Styles



勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## 19TQ015/ 19TQ015S

Bulletin PD-20266 rev. B 02/01

International  
**IRF** Rectifier

### Voltage Ratings

Part number	19TQ015
$V_R$ Max. DC Reverse Voltage (V)	15
$V_{RSM}$ Max. Working Peak Reverse Voltage (V)	

### Absolute Maximum Ratings

Parameters	19TQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	19	A	50% duty cycle @ $T_C = 80^\circ\text{C}$ , rectangular wave form
$I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7	700	A	Following any rated load condition and with rated $V_{RSM}$ applied
	330		
$E_{AS}$ Non-Repetitive Avalanche Energy	6.75	mJ	$T_J = 25^\circ\text{C}$ , $I_{AS} = 1.50$ Amps, $L = 6$ mH
$I_{AR}$ Repetitive Avalanche Current	1.50	A	Current decaying linearly to zero in 1 $\mu\text{sec}$ Frequency limited by $T_J$ max. $V_A = 3 \times V_R$ typical

### Electrical Specifications

Parameters	19TQ	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop (1) * See Fig. 1	0.36	V	@ 19A
	0.46	V	@ 38A
	0.32	V	@ 19A
	0.43	V	@ 38A
$I_{RM}$ Max. Reverse Leakage Current (1) * See Fig. 2	10.5	mA	$T_J = 25^\circ\text{C}$
	522	mA	$T_J = 100^\circ\text{C}$
	465	mA	$T_J = 100^\circ\text{C}$ , $V_R = 12\text{V}$
	285	mA	$T_J = 100^\circ\text{C}$ , $V_R = 5\text{V}$
$C_T$ Max. Junction Capacitance	2000	pF	$V_R = 5V_{DC}$ , (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$
$L_S$ Typical Series Inductance	8.0	nH	Measured lead to lead 5mm from package body
$dv/dt$ Max. Voltage Rate of Change (Rated $V_R$ )	10,000	V/ $\mu\text{s}$	

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

### Thermal-Mechanical Specifications

Parameters	19TQ	Units	Conditions
$T_J$ Max. Junction Temperature Range	-55 to 125	$^\circ\text{C}$	
$T_{stg}$ Max. Storage Temperature Range	-55 to 150	$^\circ\text{C}$	
$R_{thJC}$ Max. Thermal Resistance Junction to Case	1.50	$^\circ\text{C/W}$	DC operation * See Fig. 4
$R_{thCS}$ Typical Thermal Resistance, Case to Heatsink	0.50	$^\circ\text{C/W}$	Mounting surface, smooth and greased
wt Approximate Weight	2(0.07)	g(oz.)	
T Mounting Torque	Min.	6(5)	Kg-cm (lbf-in)
	Max.	12(10)	

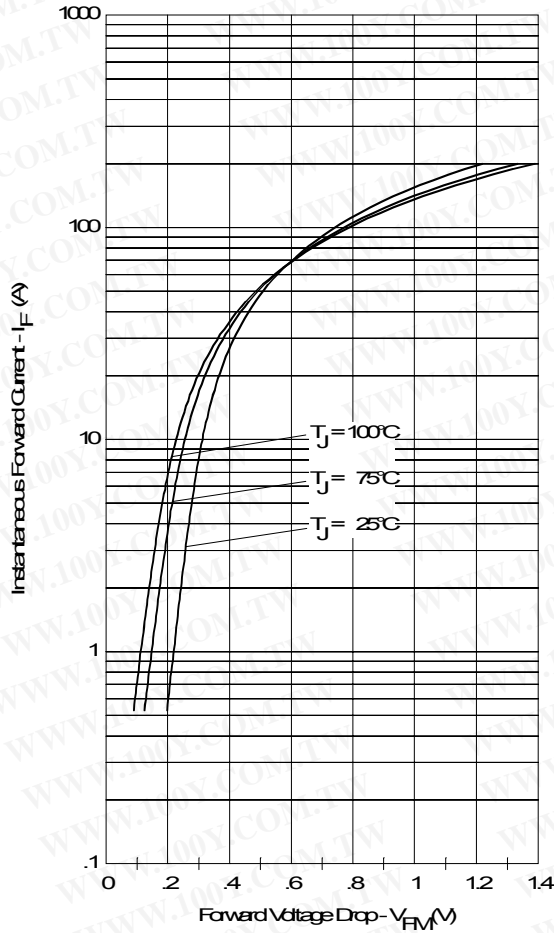


Fig. 1 - Maximum Forward Voltage Drop Characteristics

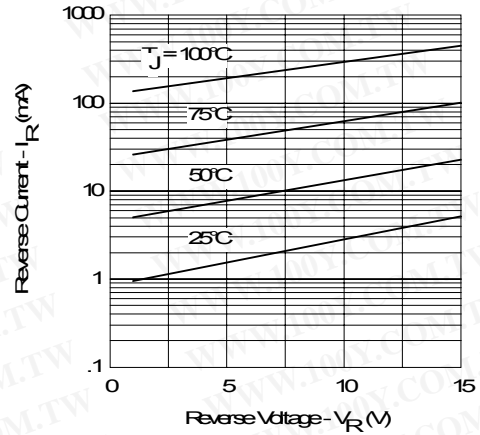


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

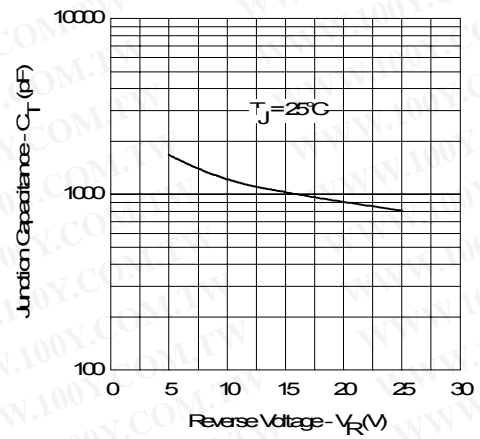


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

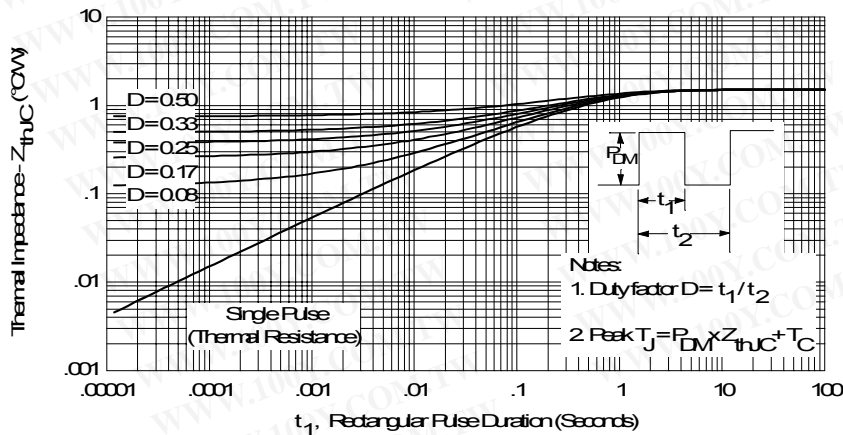


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics

19TQ015/ 19TQ015S

Bulletin PD-20266 rev. B 02/01

International  
**IR** Rectifier

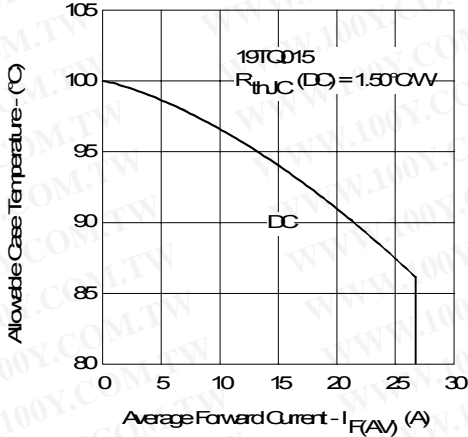


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

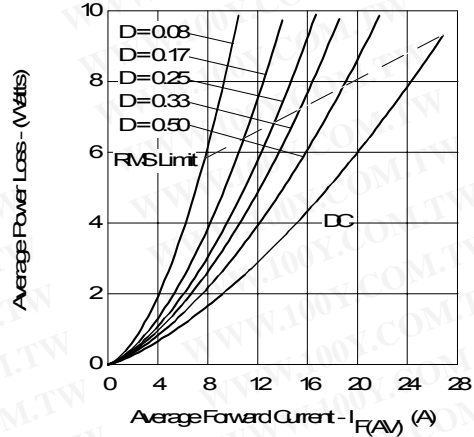


Fig. 6 - Forward Power Loss Characteristics

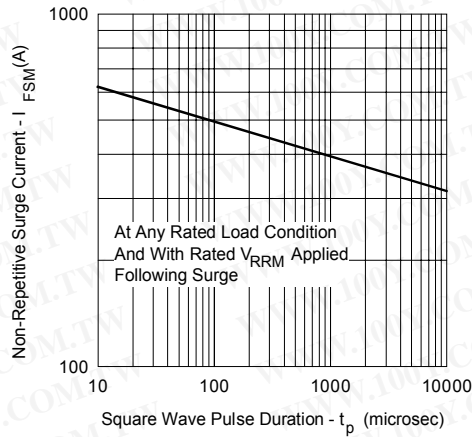


Fig. 7 - Maximum Non-Repitative Surge Current



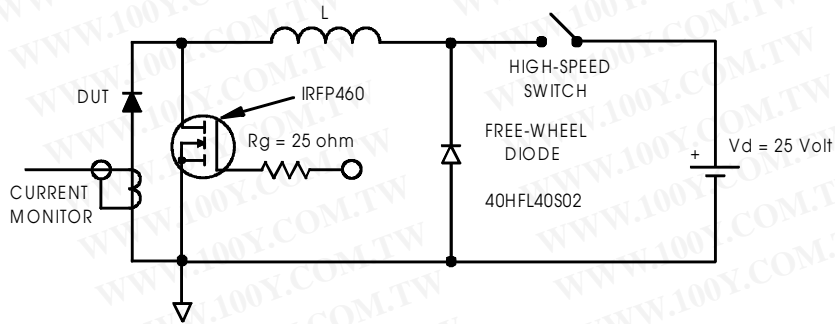


Fig. 8 - Unclamped Inductive Test Circuit

Outline Table

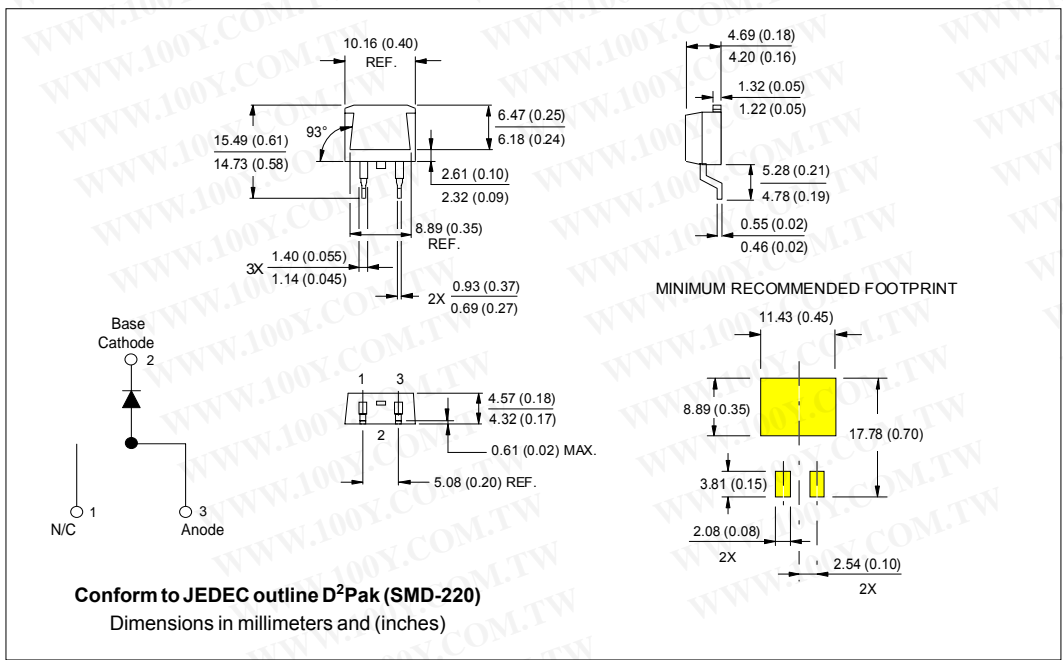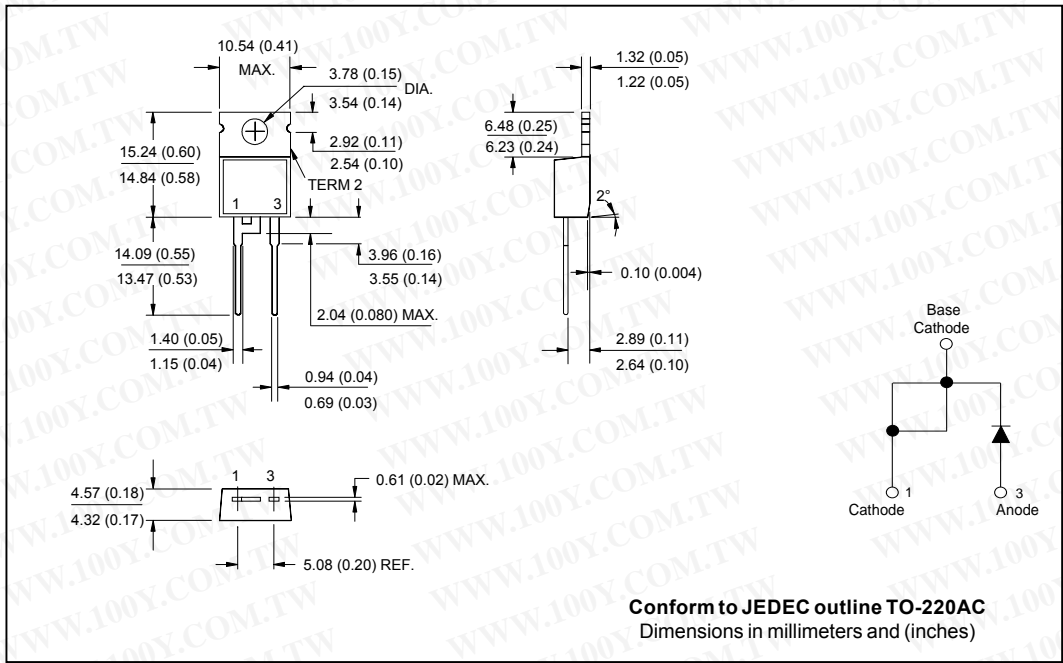


勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

19TQ015/ 19TQ015S

Bulletin PD-20266 rev. B 02/01

International  
**IR** Rectifier

### Ordering Information Table

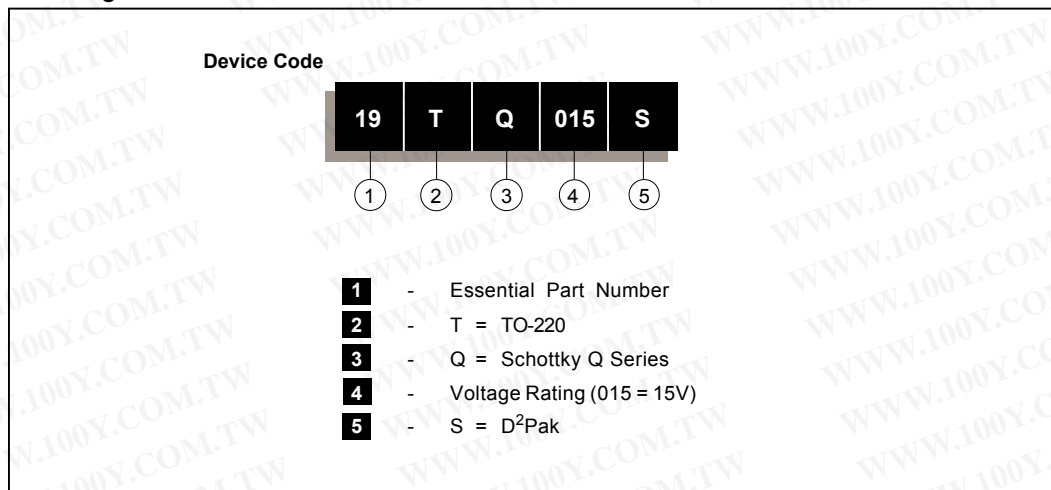

International  
**IR** Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 02/01