

# MSR Hot Restrike

MSR 575 HR 1CT



Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Product data

### • General Characteristics

System Description	Hot Restrike
Cap-Base	G22
Cap-Base Information	-
Execution	-
Operating Position	any
Main Application	Studio/Theatre
Life to 50% failures	1000 hr
EM	

### • Light Technical Characteristics

Color Code	-
Color Rendering Index	90 Ra8
Color Temperature	6000 K
Color Temperature Technical	6025 K
Chromaticity Coordinate X	323 -
Chromaticity Coordinate Y	328 -
Luminous Flux Lamp EM	40000 (min), 49000 (nom) Lm
Luminous Efficacy Lamp EM	85 Lm/W

### • Electrical Characteristics

Lamp Wattage	575 W
Lamp Wattage Technical	575 W
Lamp Current	6.95 A
Ignition Supply Voltage	207 (min) V

Dimmable Yes

### • Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	700 (max) C

### • Product Dimensions

Overall Length C	145 (max) mm
Diameter D	30 (max) mm
Width F	41 (min), 42 (nom), 43 (max) mm
Light Center Length L	69 (min), 70 (nom), 71 (max) mm
Arc Length O	7.0 mm


### • Product Data

Order code	928097705108
Full product code	928097705108
Full product name	MSR 575 HR 1CT
Order product name	MSR 575 HR 1CT/4
Pieces per pack	1
Packing configuration	4
Packs per outerbox	4
Bar code on pack - EAN1	8711500190246
Bar code on outerbox - EAN3	8711500190253
Logistic code(s) - 12NC	928097705108
Net weight per piece	0.100 kg

**PHILIPS**  
sense and simplicity

# MSR Hot Restrike

## Dimensional drawing



### G22


Product	A (Min)	A (Norm)	A (Max)	C (Max)	D (Max)	D1 (Norm)	F (Min)	F (Norm)	F (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
MSR 575 HR	-	-	-	145	30	-	41	42	43	69	70	71	7.0



勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## MSR Hot Restrike

### Photometric data

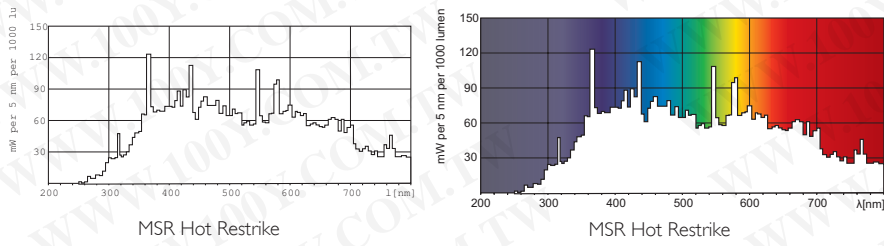

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



© 2011 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2011, October 4  
data subject to change