

Lamps > FLUORESCENT > TL > TL-E Standard Colours



Features

Available in standard and /80 colours and varying colour designations

Symmetrical, omni-directional light distribution

*TL'EM RS 40W has external ignition strip connected via a high-ohmic resistor to one of the electrodes

Description

Low-pressure mercury discharge lamps with a circular 26 mm tube

Application

Suitable for use in a wide range of luminaires for various purposes, including many decorative luminaires

Ideal for `human' applications such as schools, offices, shops, theatres etc.

Benefits

/80 colours have good colour rendering (R a > 80) and high efficacy compared with standard colours (R a 50 - 70)

Create atmospheres from warm white to cool daylight

*TL'EM RS 40W offers fast, easy ignition at low temperatures (down to -18)

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Philips Lighting Product Catalogue Family

Packaging Information

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Consumer Unit (EAN1)						Box (EAN3)		
Commercial Code	Product Description	Unit	EAN Code 1	Pieces Per	Dimensions in cm (L x H x W)	EAN Code 3	Pieces Per	Dimensions in cm (L x H x W)
TLE22W33	TL-E 22W/33 1CT/20	PCE	8711500559425	1	22.0 x 22.0 x 3.5	8711500559432	20	75.5 x 23.0 x 23.0
TLE22W33	TL-E 22W/33 1CT/20	PCE	8711500559425	1	22.0 x 22.0 x 3.5	8711500559432	20	75.5 x 23.0 x 23.0
TLE22W33	TL-E 22W/33 1CT/20	PCE	8711500559425	1	22.0 x 22.0 x 3.5	8711500559432	20	76.0 x 24.0 x 23.0
TLE22W54	TL-E 22W/54 1CT/20	PCE	8711500633903	1	22.0 x 22.0 x 3.5	8711500633910	20	75.5 x 23.0 x 23.0
TLE22W54	TL-E 22W/54 1CT/20	PCE	8711500633903	1	22.0 x 22.0 x 3.5	8711500633910	20	75.5 x 23.0 x 23.0
TLE22W54	TL-E 22W/54 1CT/20	PCE	8711500633903	1	22.0 x 22.0 x 3.5	8711500633910	20	75.5 x 23.0 x 23.0
TLE22W54	TL-E 22W/54 1CT/20	PCE	8711500633903	1	22.0 x 22.0 x 3.5	8711500633910	20	76.0 x 24.0 x 23.0
TLE30W54	TL-E 30W/54 1CT/20	PCE	8711500640345	1	23.0 x 23.0 x 3.5	8711500640352	20	75.0 x 24.0 x 24.0
TLE32W33	TL-E 32W/33 1CT/20	PCE	8711500559562	1	31.0 x 31.0 x 3.5	8711500559593	20	75.5 x 32.0 x 32.0
TLE32W33	TL-E 32W/33 1CT/20	PCE	8711500559562	1	31.0 x 31.0 x 3.5	8711500559593	20	75.5 x 32.0 x 32.0
TLE32W33	TL-E 32W/33 1CT/20	PCE	8711500559562	1	31.0 x 31.0 x 3.5	8711500559593	20	76.0 x 34.0 x 34.0
TLE32W54	TL-E 32W/54 1CT/20	PCE	8711500633873	1	31.0 x 31.0 x 3.5	8711500633880	20	75.5 x 32.0 x 32.0
TLE32W54	TL-E 32W/54 1CT/20	PCE	8711500633873	1	31.0 x 31.0 x 3.5	8711500633880	20	76.0 x 34.0 x 34.0
TLE32W54	TL-E 32W/54 1CT/20	PCE	8711500633873	1	31.0 x 31.0 x 3.5	8711500633880	20	75.5 x 32.0 x 32.0
TLE32W54	TL-E 32W/54 2CT/10	PK	8711500633873	2	31.0 x 31.0 x 7.0	8711500633958	20	74.5 x 32.0 x 32.0
TLE32W54	TL-E 32W/54 1CT/20	PCE	8711500633873	1	31.0 x 31.0 x 3.5	8711500633880	20	74.5 x 32.0 x 32.0
TLE40W33	TL-E 40W/33 1CT/20	PCE	8711500284549	1	40.0 x 40.0 x 3.5	8711500284518	20	76.0 x 43.0 x 43.0
TLE40W33	TL-E 40W/33 1CT/20	PCE	8711500284549	1	40.0 x 40.0 x 3.5	8711500284518	20	75.0 x 42.0 x 42.0
TLE40W33	TL-E 40W/33 1CT/20	PCE	8711500284549	1	40.0 x 40.0 x 3.5	8711500284518	20	75.0 x 42.0 x 42.0
TLE40W54	TL-E 40W/54 1CT/20	PCE	8711500559913	1	40.0 x 40.0 x 3.5	8711500284501	20	75.0 x 42.0 x 42.0
TLE40W54	TL-E 40W/54 1CT/20	PCE	8711500559913	1	40.0 x 40.0 x 3.5	8711500284501	20	75.0 x 42.0 x 42.0
TLE40W54	TL-E 40W/54 1CT/20	PCE	8711500559913	1	40.0 x 40.0 x 3.5	8711500284501	20	75.0 x 42.0 x 42.0

Philips Lighting Product Catalogue Family


Technical Product Information

Commercial Code	Product Description	Volt (V)	Watt (W)	Finish	Cap	Color Temp. (K)	Color Descriptions	Lumen (Lm)	Beam Angle (°)	CRI (Ra)	Avg. Life Hours
TLE22W33	TL-E 22W/33 1CT/20	220	22			4100	33 COOL WHITE	1250		63	
TLE22W33	TL-E 22W/33 1CT/20	220	22			4100	33 COOL WHITE	1250		63	
TLE22W33	TL-E 22W/33 1CT/20	220	22			4100	33 COOL WHITE	1250		63	
TLE22W54	TL-E 22W/54 1CT/20	220	22			6200	54 COOL DAYLIGHT	1105		72	
TLE22W54	TL-E 22W/54 1CT/20	220	22			6200	54 COOL DAYLIGHT	1105		72	
TLE22W54	TL-E 22W/54 1CT/20	220	22			6200	54 COOL DAYLIGHT	1105		72	
TLE22W54	TL-E 22W/54 1CT/20	220	22			6200	54 COOL DAYLIGHT	1105		72	
TLE30W54	TL-E 30W/54 1CT/20	220	30			6200	54 COOL DAYLIGHT	1410		72	
TLE32W33	TL-E 32W/33 1CT/20	220	32			4100	33 COOL WHITE	2050		63	
TLE32W33	TL-E 32W/33 1CT/20	220	32			4100	33 COOL WHITE	2050		63	
TLE32W33	TL-E 32W/33 1CT/20	220	32			4100	33 COOL WHITE	2050		63	
TLE32W54	TL-E 32W/54 1CT/20	220	32			6200	54 COOL DAYLIGHT	1810		72	
TLE32W54	TL-E 32W/54 1CT/20	220	32			6200	54 COOL DAYLIGHT	1810		72	
TLE32W54	TL-E 32W/54 1CT/20	220	32			6200	54 COOL DAYLIGHT	1810		72	
TLE32W54	TL-E 32W/54 1CT/20	220	32			6200	54 COOL DAYLIGHT	1810		72	
TLE32W54	TL-E 32W/54 2CT/10	220	32			6200	54 COOL DAYLIGHT	1810		72	
TLE32W54	TL-E 32W/54 1CT/20	220	32			6200	54 COOL DAYLIGHT	1810		72	
TLE40W33	TL-E 40W/33 1CT/20	220	40			4100	33 COOL WHITE	2850		63	
TLE40W33	TL-E 40W/33 1CT/20	220	40			4100	33 COOL WHITE	2850		63	
TLE40W33	TL-E 40W/33 1CT/20	220	40			4100	33 COOL WHITE	2850		63	
TLE40W54	TL-E 40W/54 1CT/20	220	40			6200	54 COOL DAYLIGHT	2470		72	
TLE40W54	TL-E 40W/54 1CT/20	220	40			6200	54 COOL DAYLIGHT	2470		72	
TLE40W54	TL-E 40W/54 1CT/20	220	40			6200	54 COOL DAYLIGHT	2470		72	

Dimension Diagram

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Philips Lighting Product Catalogue Family

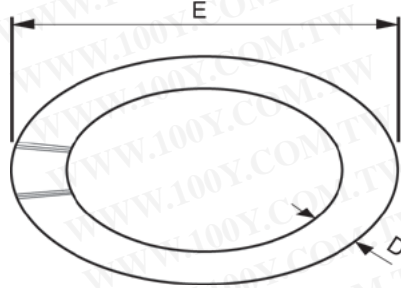

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Type	D NOM
TLE22W33	26
TLE22W33	26
TLE22W33	26
TLE22W54	26
TLE22W54	26
TLE22W54	26
TLE22W54	26
TLE32W33	26
TLE32W33	26
TLE32W33	26
TLE32W54	26
TLE32W54	26
TLE32W54	26
TLE32W54	26
TLE32W54	26
TLE40W33	26
TLE40W33	26
TLE40W33	26
TLE40W54	26
TLE40W54	26
TLE40W54	26

Philips Lighting Product Catalogue Family

Type	D NOM	C NOM
TLE30W54	26	209

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)