

## TUV T5

### TUV 64T5 4P SE UNP

TUV T5 lamps are single- or double-ended UVC (germicidal) lamps used in professional water and air disinfection units. The small 16 mm diameter of the lamp allows for a small system design and design flexibility. TUV T5 lamps offer constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Product data

#### • General Characteristics

System Description	High Efficiency
Cap-Base	4 Pins Single Ended
Cap-Base Information	4 Pins Single Ended
Bulb	T5 [T5]
Main Application	Disinfection
Useful Life	9000 hr

#### • Electrical Characteristics

Lamp Wattage	75 W
Lamp Wattage Technical	75 W
Lamp Voltage	176 V
Lamp Current	0.425 A

#### • Light Technical Characteristics

Color Code	-
Color Designation (text)	-

#### • UV-related Characteristics

UV-C Radiation	31 W
----------------	------

#### • Product Dimensions


Reference Length A	1556.6 (max) mm
Overall Length C	1564.5 (max) mm
Diameter D	19 (max) mm

#### • Product Data

Order code	927970804099
Full product code	927970804099
Full product name	TUV 64T5 HE 4P SE UNP
Order product name	TUV 64T5 HE 4P SE UNP
Pieces per pack	1
Packing configuration	32
Packs per outerbox	32
Bar code on pack - EAN1	8711500642813
Bar code on outerbox - EAN3	8711500642820
Logistic code(s) - 12NC	927970804099
Net weight per piece	156.000 gr

**PHILIPS**  
sense and simplicity

Dimensional drawing




4 pins single ended

Product	A (Min)	A (Norm)	A (Max)	B (Min)	B (Norm)	B (Max)	C (Min)	C (Norm)	C (Max)	D (Max)	O (Norm)
TUV 64T5 HE 4P SE	-	-	1556.6	-	-	-	-	-	1564.5	19.3	-



# TUV T5

## Photometric data

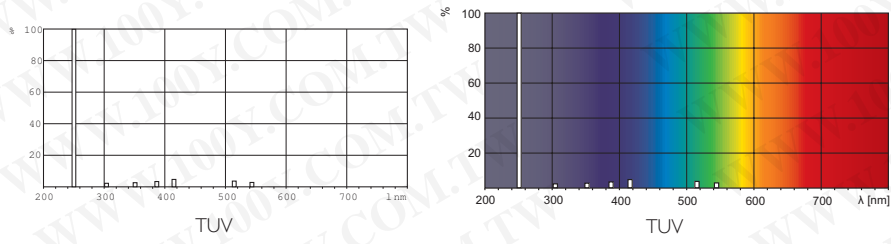

© 2011 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2011, May 17  
data subject to change