

J	ANSI Code	Volts V	Watts W	Initial Lumens Lm	Average Life Hrs.	Max. Overall Length mm L ₁	Contact to Contact mm L ₂	Max. Bulb Dia. mm D	Base	Bulb Finish	Fila-ment	Socket	Fig. No.
J 120V-250W		120	250	4,000	2,000	119.6	114.2	9.4	R7S-12	Clear	C-8	J-1, J-3	1
J 120V-300W	EHM	120	300	5,900	2,000	119.6	114.2	9.4	R7S-12	Clear	C-8	J-1, J-3	1
J 120V-300WF	EHZ	120	300	5,770	2,000	119.6	114.2	9.4	R7S-12	Frosted	C-8	J-1, J-3	1
J 120V-500W	FCL	120	500	11,000	2,000	119.6	114.2	12.0	R7S-12	Clear	C-8	J-1, J-3	1
J 120V-500WF	FCZ	120	500	10,700	2,000	119.6	114.2	12.0	R7S-12	Frosted	C-8	J-1, J-3	1
J 120V-1000WB		120	1,000	22,000	2,000	191.1	185.7	12.0	R7S-12	Clear	C-8	J-3	1
J 120V-1500WB		120	1,500	35,000	2,000	256.1	250.7	12.0	R7S-12	Clear	C-8	J-3	1
J 130V-300W		130	300	5,900	2,000	119.6	114.2	9.4	R7S-12	Clear	C-8	J-1, J-3	1
J 130V-500WB	DVS	130	500	10,500	2,000	119.6	114.2	12.0	R7S-12	Clear	C-8	J-1, J-3	1
J 208V-1500WB		208	1,500	31,500	2,000	256.1	250.7	12.0	R7S-12	Clear	C-8	J-3	1
✓ J 220V-500W		220	500	9,500	2,000	119.6	114.2	12.0	R7S-12	Clear	C-8	J-1, J-3	1
J 225V-750WB		225	750	15,000	2,000	191.1	185.7	12.0	R7S-12	Clear	C-8	J-3	1
J 225V-1000WB		225	1,000	21,500	2,000	191.1	185.7	12.0	R7S-12	Clear	C-8	J-3	1
J 225V-1000WB ₁		225	1,000	21,500	2,000	256.1	250.7	12.0	R7S-12	Clear	C-8	J-3	1
J 225V-1500WB		225	1,500	33,000	2,000	256.1	250.7	12.0	R7S-12	Clear	C-8	J-3	1
J 225V-2000WB		225	2,000	44,000	2,000	332.8	327.4	12.0	R7S-12	Clear	C-8	J-3	1
J 225V-2000WG		225	2,000	44,000	2,000	334.4	322.0	12.0	Fa-4	Clear	C-8	—	2
J 230V-300W		230	300	5,000	2,000	119.6	114.2	9.4	R7S-12	Clear	CC-8	J-1, J-3	1
J 240V-300W		240	300	5,000	2,000	119.6	114.2	9.4	R7S-12	Clear	CC-8	J-1, J-3	1
✓ J 240V-500W	BSH	240	500	9,500	2,000	119.6	114.2	12.0	R7S-12	Clear	C-8	J-1, J-3	1
J 240V-750WB		240	750	15,000	2,000	191.1	185.7	12.0	R7S-12	Clear	C-8	J-3	1
J 240V-1000WB	DZX	240	1,000	21,500	2,000	191.1	185.7	12.0	R7S-12	Clear	C-8	J-3	1
J 240V-1000WB ₁		240	1,000	21,500	2,000	256.1	250.7	12.0	R7S-12	Clear	C-8	J-3	1
J 240V-1000WB ₂		240	1,000	20,000	2,000	211.4	206.0	12.0	R7S-12	Clear	C-8	J-3	1
J 240V-1000WB ₄		240	1,000	22,000	1,500	119.6	114.2	12.0	R7S-12	Clear	C-8	—	1
J 240V-1500WB	DYD	240	1,500	33,000	2,000	256.1	250.7	12.0	R7S-12	Clear	C-8	J-3	1
J 240V-2000WB		240	2,000	44,000	2,000	332.8	327.4	12.0	R7S-12	Clear	C-8	J-3	1
J 240V-2000WG		240	2,000	44,000	2,000	334.4	322.0	12.0	Fa-4	Clear	C-8	—	2
J 277V-1500WB		277	1,500	31,500	2,000	256.1	250.7	12.0	R7S-12	Clear	C-8	J-3	1

Fig. 1


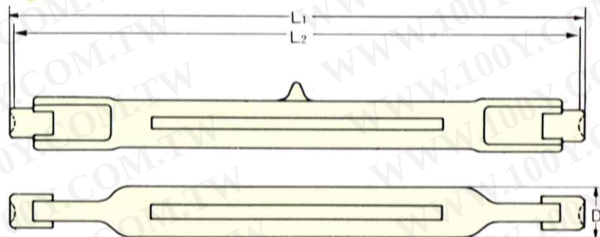


Fig. 2



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)