

# 6N135/6, HCNW135/6, HCNW4502/3

## HCPL-2502/0452/0453/0500/0501/4502/4503

### Single Channel, High Speed Optocouplers



## Data Sheet



Lead (Pb) Free  
RoHS 6 fully  
compliant

RoHS 6 fully compliant options available;  
-xxxE denotes a lead-free product

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Description


These diode-transistor optocouplers use an insulating layer between a LED and an integrated photodetector to provide electrical insulation between input and output. Separate connections for the photodiode bias and output-transistor collector increase the speed up to a hundred times that of a conventional phototransistor coupler by reducing the base-collector capacitance.

These single channel optocouplers are available in 8-Pin DIP, SO-8 and Widebody package configurations.

The 6N135, HCPL-0500, and HCNW135 are for use in TTL/CMOS, TTL/LSTTL or wide bandwidth analog applications. Current transfer ratio (CTR) for these devices is 7% minimum at  $I_F = 16$  mA.

The 6N136, HCPL-2502, HCPL-0501, and HCNW136 are designed for high speed TTL/TTL applications. A standard 16 mA TTL sink current through the input LED will provide enough output current for 1 TTL load and a 5.6 k $\Omega$  pull-up resistor. CTR for these devices is 19% minimum at  $I_F = 16$  mA.

### Functional Diagram

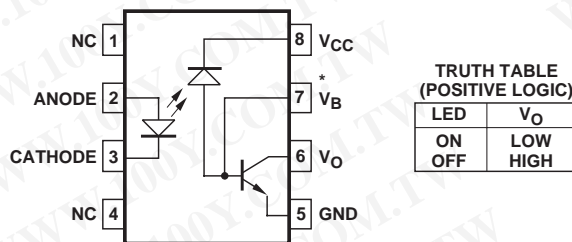

TRUTH TABLE  
(POSITIVE LOGIC)

| LED | V <sub>O</sub> |
|-----|----------------|
| ON  | LOW            |
| OFF | HIGH           |

\* NOTE: FOR 4502/3, 0452/3,  
PIN 7 IS NOT CONNECTED.

A 0.1  $\mu$ F bypass capacitor must be connected between pins 5 and 8.

### Features

- 15 kV/ $\mu$ s minimum common mode transient immunity at  $V_{CM} = 1500$  V (4503/0453)
- High speed: 1 Mb/s
- TTL compatible
- Available in 8-Pin DIP, SO-8, widebody packages
- Open collector output
- Guaranteed performance from temperature: 0°C to 70°C
- Safety approval  
UL Recognized – 3750 V<sub>rms</sub> for 1 minute (5000 V<sub>rms</sub> for 1 minute for HCNW and Option 020 devices) per UL1577  
CSA Approved  
IEC/EN/DIN EN 60747-5-2 Approved
  - V<sub>IORM</sub> = 630 V peak for HCPL-4503#060
  - V<sub>IORM</sub> = 1414 V peak for HCNW devices
- Dual channel version available (253X/4534/053X/0534)
- MIL-PRF-38534 hermetic version available (55XX/65XX/4N55)

### Applications


- High voltage insulation
- Video signal isolation
- Power transistor isolation in motor drives
- Line receivers
- Feedback element in switched mode power supplies
- High speed logic ground isolation – TTL/TTL, TTL/CMOS, TTL/LSTTL
- Replaces pulse transformers
- Replaces slow phototransistor isolators
- Analog signal ground isolation

**CAUTION:** It is advised that normal static precautions be taken in handling and assembly of this component to prevent damage and/or degradation which may be induced by ESD.

The HCPL-4502, HCPL-0452, and HCNW4502 provide the electrical and switching performance of the 6N136, HCPL-0501, and HCNW136 with increased ESD protection.

The HCPL-4503, HCPL-0453, and HCNW4503 are similar to the HCPL-4502, HCPL-0452, and HCNW4502 optocouplers but have increased common mode transient immunity of 15 kV/ $\mu$ s minimum at  $V_{CM} = 1500V$  guaranteed.

### Schematic

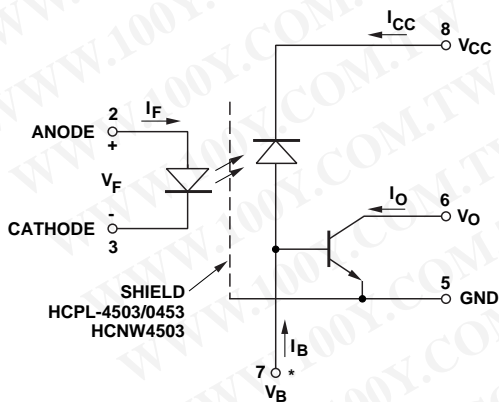

\* NOTE: FOR HCPL-4502/3, HCPL-0452/3, HCNW4502/3, PIN 7 IS NOT CONNECTED.

### Selection Guide

| Minimum CMR        |              | 8-Pin DIP (300 Mil)        |                        |                       | Small-Outline SO-8 (400 Mil) |                       | Widebody Hermetic      |                                   |
|--------------------|--------------|----------------------------|------------------------|-----------------------|------------------------------|-----------------------|------------------------|-----------------------------------|
| dV/dt (V/ $\mu$ s) | $V_{CM}$ (V) | Current Transfer Ratio (%) | Single Channel Package | Dual Channel Package* | Single Channel Package       | Dual Channel Package* | Single Channel Package | Single and Dual Channel Packages* |
| 1,000              | 10           | 7                          | 6N135                  | HCPL-2530             | HCPL-0500                    | HCPL-0530             | HCNW135                |                                   |
|                    |              | 19                         | 6N136<br>HCPL-4502†    | HCPL-2531             | HCPL-0501<br>HCPL-0452†      | HCPL-0531             | HCNW136<br>HCNW4502†   |                                   |
|                    |              | 15                         | HCPL-2502              |                       |                              |                       |                        |                                   |
| 15,000             | 1500         | 19                         | HCPL-4503†             | HCPL-4534             | HCPL-0453†                   | HCPL-0534             | HCNW4503†              |                                   |
| 1,000              | 10           | 9                          |                        |                       |                              |                       |                        | HCPL-55XX<br>HCPL-65XX<br>4N55    |

\*Technical data for these products are on separate Avago publications.

†Pin 7, transistor base, is not connected.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Ordering Information

6N135, 6N136, HCPL-2502, HCPL-4502 and HCPL-4503, HCPL-0452, HCPL-0453, HCPL-0500, HCPL-0501 are UL Recognized with 3750 Vrms for 1 minute per UL1577.

HCNW135, HCNW136, HCNW4502 and HCNW4503 are UL Recognized with 5000 Vrms for 1 minute per UL1577. All devices above listed are approved under CSA Component Acceptance Notice #5, File CA 88324.

| Part number   | Option         |                    | Package                       | Surface Mount | Gull Wing | Tape & Reel | UL 5000 Vrms/ 1 Minute rating | IEC/EN/DIN EN 60747-5-2 | Quantity      |
|---|----------------|--------------------|-------------------------------|---------------|-----------|-------------|-------------------------------|-------------------------|---------------|
|   | RoHS Compliant | Non RoHS Compliant |                               |               |           |             |                               |                         |               |
| 6N135<br>6N136<br>HCPL-2502<br>HCPL-4502<br>HCPL-4503 | -000E          | No option          | 300mil<br>DIP-8               |               |           |             |                               |                         | 50 per tube   |
|   | -300E          | #300               |                               | X             | X         |             |                               |                         | 50 per tube   |
|   | -500E          | #500               |                               | X             | X         | X           |                               |                         | 1000 per reel |
|   | -020E          | #020               |                               |               |           |             | X                             |                         | 50 per tube   |
|   | -320E          | #320               |                               | X             | X         |             | X                             |                         | 50 per tube   |
|   | -520E          | #520               |                               | X             | X         | X           | X                             |                         | 1000 per reel |
|   | -060E          | #060               |                               |               |           |             |                               | X                       | 50 per tube   |
|   | -360E          | #360               |                               | X             | X         |             |                               | X                       | 50 per tube   |
|   | -560E          | #560               |                               | X             | X         | X           |                               | X                       | 1000 per reel |
|   | HCPL-0452      | -000E              |                               | No option     | 50-8      |             |                               |                         |               |
| HCPL-0453   | -500E          | #500               | X                             | X             |           | X           |                               |                         | 1500 per reel |
| HCPL-0500   | -060E          | #060               |                               |               |           |             |                               | X                       | 100 per tube  |
| HCPL-0501   | -560E          | #560               | X                             | X             |           | X           |                               | X                       | 1500 per reel |
| HCNW135   | -000E          | No option          | 400mil Wide-<br>body<br>DIP-8 |               |           |             |                               |                         |               |
| HCNW136   | -300E          | #300               |                               | X             | X         |             |                               |                         | 42 per tube   |
| HCNW4502  | -500E          | #500               |                               | X             | X         | X           |                               |                         | 750 per reel  |
| HCNW4503  | -520E          | #520               |                               | X             | X         | X           | X                             |                         | 750 per reel  |

To order, choose a part number from the part number column and combine with the desired option from the option column to form an order entry.

Example 1:

HCPL-4502-560E to order product of 300mil DIP Gull Wing Surface Mount package in Tape and Reel packaging with IEC/EN/DIN EN 60747-5-2 Safety Approval in RoHS compliant.

Example 2:

HCPL-4502 to order product of 300mil DIP package in tube packaging and non RoHS compliant.

Option datasheets are available. Contact your Avago sales representative or authorized distributor for information.



Remarks: The notation '#XXX' is used for existing products, while (new) products launched since 15th July 2001 and RoHS compliant option will use '-XXXE'.

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-34970699**  
**勝特力电子(深圳) 86-755-83298787**  
**Http://www.100y.com.tw**

Package Outline Drawings

8-Pin DIP Package (6N135/6, HCPL-4502/3, HCPL-2502)


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

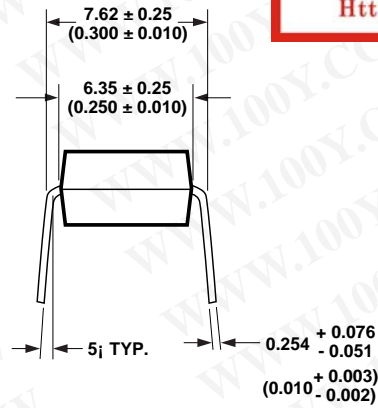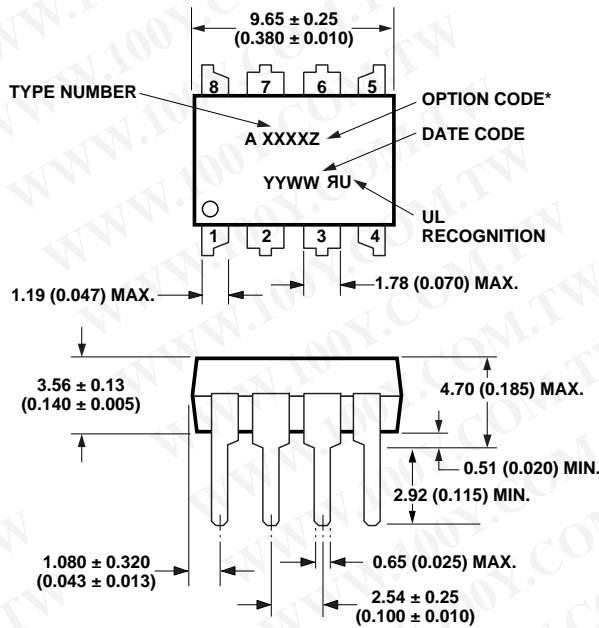

DIMENSIONS IN MILLIMETERS AND (INCHES).  
 \*MARKING CODE LETTER FOR OPTION NUMBERS  
 "L" = OPTION 020  
 "V" = OPTION 060  
 OPTION NUMBERS 300 AND 500 NOT MARKED.

NOTE: FLOATING LEAD PROTRUSION IS 0.25 mm (10 mils) MAX.



8-Pin DIP Package with Gull Wing Surface Mount Option 300 (6N135/6, HCPL-4502/3)

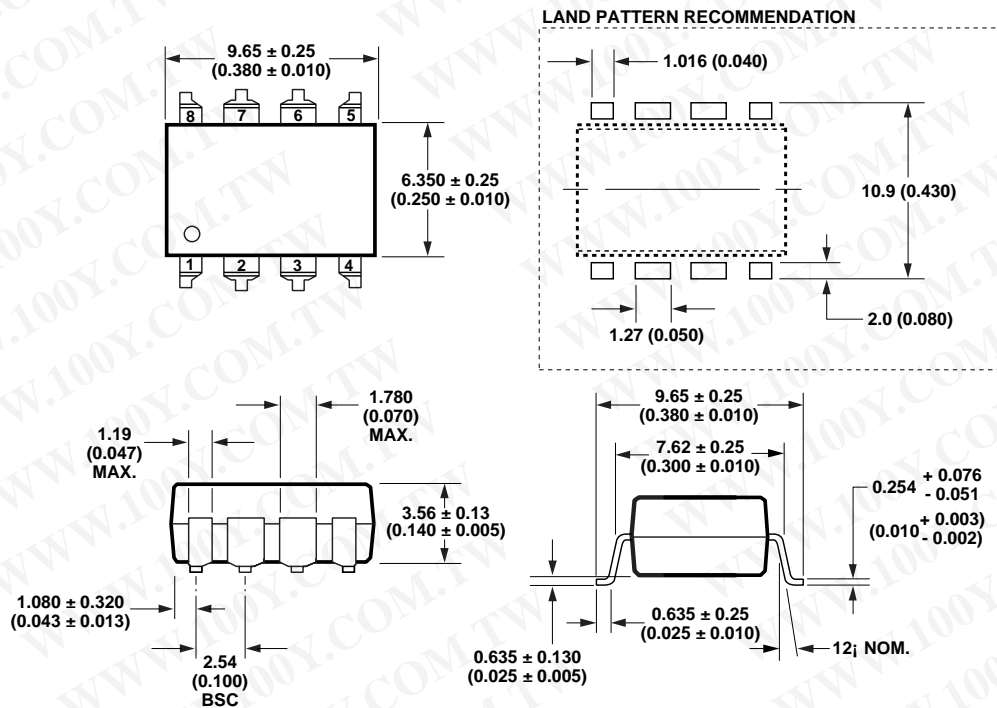

DIMENSIONS IN MILLIMETERS (INCHES).  
 LEAD COPLANARITY = 0.10 mm (0.004 INCHES).

NOTE: FLOATING LEAD PROTRUSION IS 0.25 mm (10 mils) MAX.

**Small Outline SO-8 Package (HCPL-0500/1, HCPL-0452/3)**

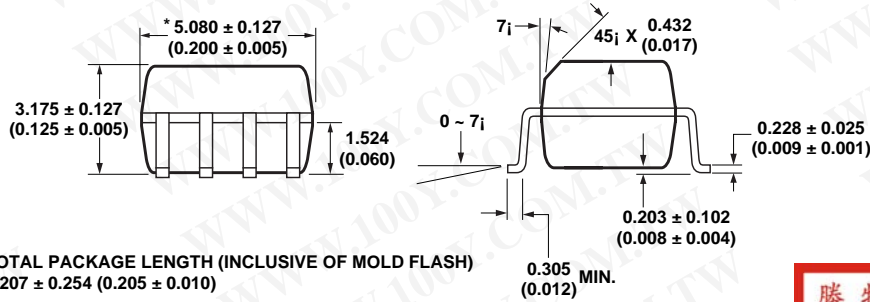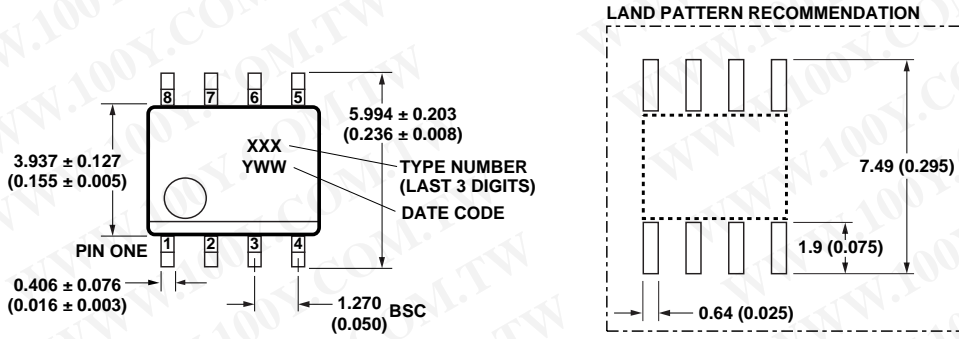


\* TOTAL PACKAGE LENGTH (INCLUSIVE OF MOLD FLASH)  
5.207 ± 0.254 (0.205 ± 0.010)

DIMENSIONS IN MILLIMETERS (INCHES).  
LEAD COPLANARITY = 0.10 mm (0.004 INCHES) MAX.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


**8-Pin Widebody DIP Package (HCNW135/6, HCNW4502/3)**

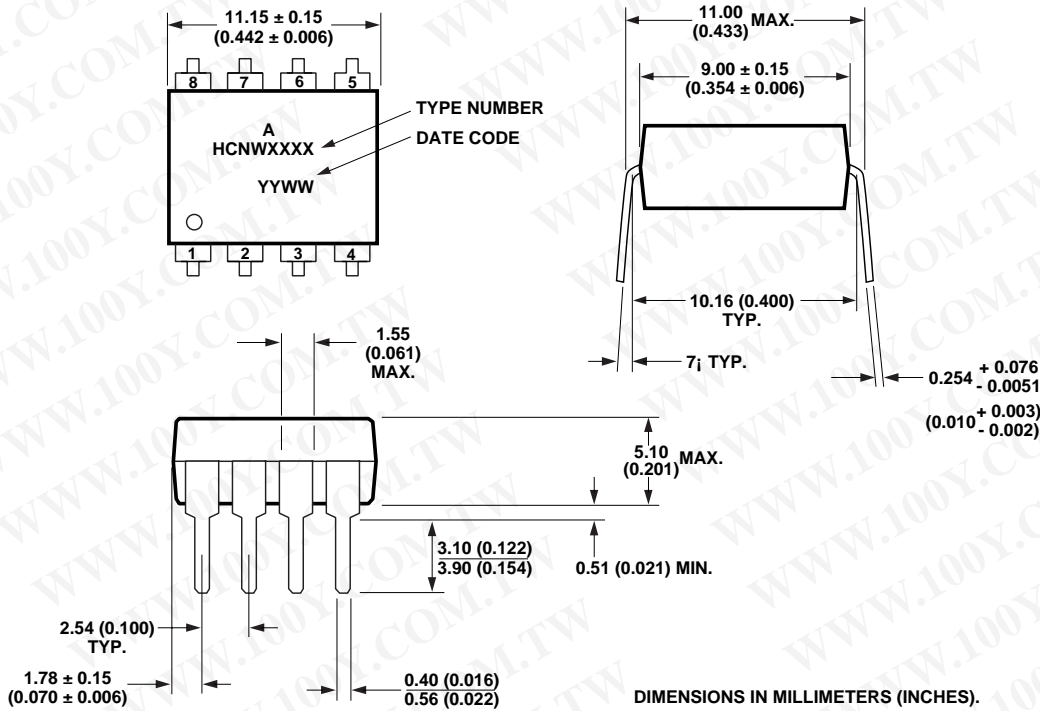

DIMENSIONS IN MILLIMETERS (INCHES).

NOTE: FLOATING LEAD PROTRUSION IS 0.25 mm (10 mils) MAX.

8-Pin Widebody DIP Package with Gull Wing Surface Mount Option 300 (HCNW135/6, HCNW4502/3)

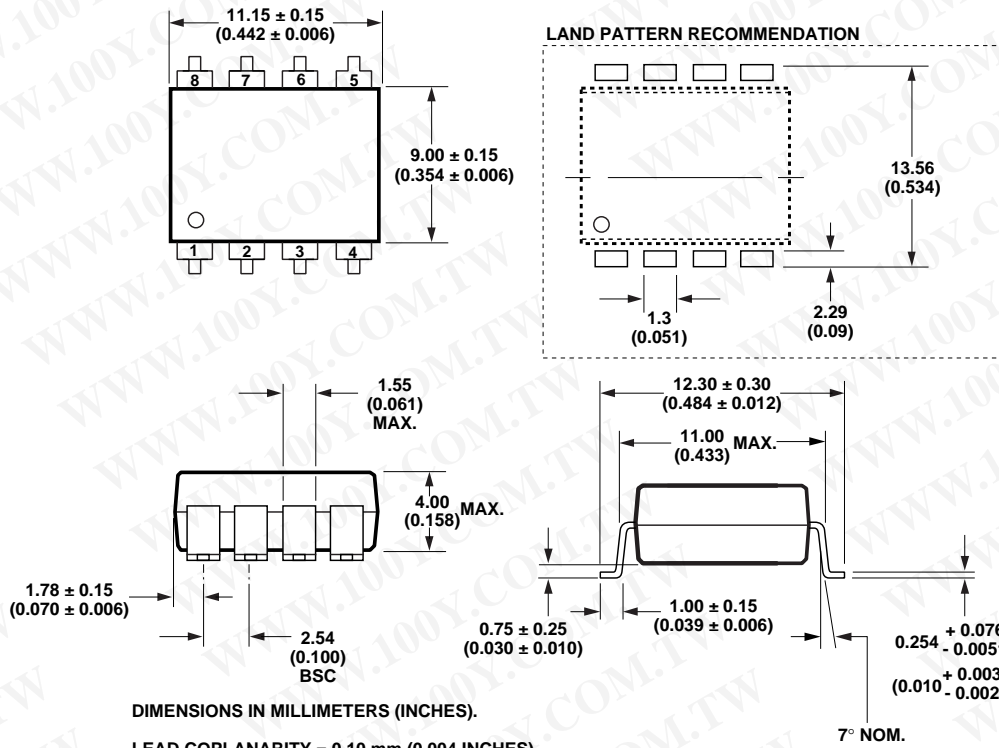


DIMENSIONS IN MILLIMETERS (INCHES).

LEAD COPLANARITY = 0.10 mm (0.004 INCHES).

NOTE: FLOATING LEAD PROTRUSION IS 0.25 mm (10 mils) MAX.


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Solder Reflow Temperature Profile

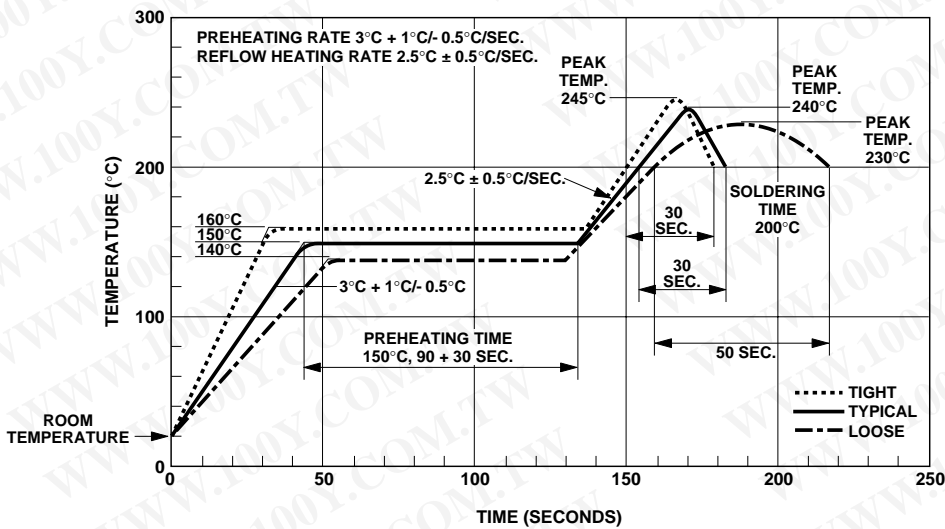

Note: Non-halide flux should be used.

### Recommended Pb-Free IR Profile

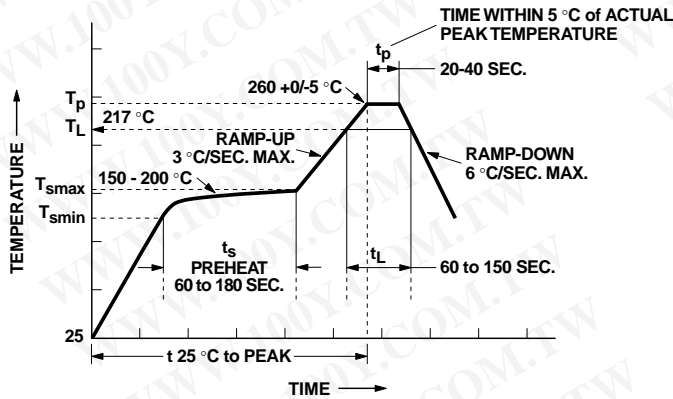

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-34970699**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**NOTES:**  
 THE TIME FROM 25 °C TO PEAK TEMPERATURE = 8 MINUTES MAX.  
 $T_{smax} = 200\text{ °C}$ ,  $T_{smin} = 150\text{ °C}$

**Note:** Non-halide flux should be used.

### Regulatory Information

The devices contained in this data sheet have been approved by the following organizations:

#### UL

Recognized under UL 1577, Component Recognition Program, File E55361.

#### CSA

Approved under CSA Component Acceptance Notice #5, File CA 88324.

#### IEC/EN/DIN EN 60747-5-2

Approved under  
 IEC 60747-5-2:1997 + A1:2002  
 EN 60747-5-2:2001 + A1:2002  
 DIN EN 60747-5-2 (VDE 0884  
 Teil 2):2003-01  
 (HCNW and Option 060 only)

### Insulation and Safety Related Specifications

| Parameter   | Symbol | 8-Pin DIP | 50-8  | Widebody  | Units | Conditions   |
|---|--------|-----------|-------|-----------|-------|--|
|   |        | (300 Mil) | Value | (400 Mil) |       |  |
| Minimum External Air Gap (External Clearance)     | L(101) | 7.1       | 4.9   | 9.6       | mm    | Measured from input terminals to output terminals, shortest distance through air.  |
| Minimum External Tracking (External Creepage)     | L(102) | 7.4       | 4.8   | 10.0      | mm    | Measured from input terminals to output terminals, shortest distance path along body.  |
| Minimum Internal Plastic Gap (Internal Clearance) |        | 0.08      | 0.08  | 1.0       | mm    | Through insulation distance, conductor to conductor, usually the direct distance between the photoemitter and photodetector inside the optocoupler cavity. |
| Minimum Internal Tracking (Internal Creepage)     |        | NA        | NA    | 4.0       | mm    | Measured from input terminals to output terminals, along internal cavity.  |
| Tracking Resistance (Comparative Tracking Index)  | CTI    | 200       | 200   | 200       | Volts | DIN IEC 112/VDE 0303 Part 1  |
| Isolation Group                                   |        | IIIa      | IIIa  | IIIa      |       | Material Group (DIN VDE 0110, 1/89, Table 1)   |

Option 300 - surface mount classification is Class A in accordance with CECC 00802.

**IEC/EN/DIN EN 60747-5-2 Insulation Related Characteristics (HCPL-4503 OPTION 060 ONLY)**

| Description  | Symbol         | Characteristic | Units             |
|--|----------------|----------------|-------------------|
| Installation classification per DIN VDE 0110/1.89, Table 1<br>for rated mains voltage $\leq 300$ V rms   |                | I-IV           |                   |
| for rated mains voltage $\leq 450$ V rms   |                | I-III          |                   |
| Climatic Classification  |                | 55/100/21      |                   |
| Pollution Degree (DIN VDE 0110/1.89)   |                | 2              |                   |
| Maximum Working Insulation Voltage   | $V_{IORM}$     | 630            | V <sub>peak</sub> |
| Input to Output Test Voltage, Method b*<br>$V_{IORM} \times 1.875 = V_{PR}$ 100% Production Test with $t_m = 1$ sec,<br>Partial Discharge $< 5$ pC | $V_{PR}$       | 1181           | V <sub>peak</sub> |
| Input to Output Test Voltage, Method a*<br>$V_{IORM} \times 1.5 = V_{PR}$ Type and sample test,<br>$t_m = 60$ sec, Partial Discharge $< 5$ pC      | $V_{PR}$       | 945            | V <sub>peak</sub> |
| Highest Allowable Overvoltage*<br>(Transient Overvoltage, $t_{ini} = 10$ sec)  | $V_{IOTM}$     | 6000           | V <sub>peak</sub> |
| Safety Limiting Values<br>(Maximum values allowed in the event of a failure,<br>also see Figure 9, Thermal Derating curve.)                        |                |                |                   |
| Case Temperature   | $T_s$          | 175            | °C                |
| Input Current  | $I_{S,INPUT}$  | 230            | mA                |
| Output Power   | $P_{S,OUTPUT}$ | 600            | mW                |
| Insulation Resistance at $T_s, V_{io} = 500$ V   | $R_s$          | $\geq 10^9$    | $\Omega$          |

**IEC/EN/DIN EN 60747-5-2 Insulation Related Characteristics (HCNW135/6, HCNW4502/3 ONLY)**

| Description  | Symbol         | Characteristic | Units             |
|--|----------------|----------------|-------------------|
| Installation classification per DIN VDE 0110/1.89, Table 1<br>for rated mains voltage $\leq 600$ V rms   |                | I-IV           |                   |
| for rated mains voltage $\leq 1000$ V rms  |                | I-III          |                   |
| Climatic Classification  |                | 55/85/21       |                   |
| Pollution Degree (DIN VDE 0110/1.89)   |                | 2              |                   |
| Maximum Working Insulation Voltage   | $V_{IORM}$     | 1414           | V <sub>peak</sub> |
| Input to Output Test Voltage, Method b*<br>$V_{IORM} \times 1.875 = V_{PR}$ 100% Production Test with $t_m = 1$ sec,<br>Partial Discharge $< 5$ pC | $V_{PR}$       | 2652           | V <sub>peak</sub> |
| Input to Output Test Voltage, Method a*<br>$V_{IORM} \times 1.5 = V_{PR}$ Type and sample test,<br>$t_m = 60$ sec, Partial Discharge $< 5$ pC      | $V_{PR}$       | 2121           | V <sub>peak</sub> |
| Highest Allowable Overvoltage*<br>(Transient Overvoltage, $t_{ini} = 10$ sec)  | $V_{IOTM}$     | 8000           | V <sub>peak</sub> |
| Safety Limiting Values<br>(Maximum values allowed in the event of a failure,<br>also see Figure 9, Thermal Derating curve.)                        |                |                |                   |
| Case Temperature   | $T_s$          | 150            | °C                |
| Input Current  | $I_{S,INPUT}$  | 400            | mA                |
| Output Power   | $P_{S,OUTPUT}$ | 700            | mW                |
| Insulation Resistance at $T_s, V_{io} = 500$ V   | $R_s$          | $\geq 10^9$    | $\Omega$          |

\*Refer to the front of the optocoupler section of the current catalog, under Product Safety Regulations section IEC/EN/DIN EN 60747-5-2 for a detailed description.

Note: Isolation characteristics are guaranteed only within the safety maximum ratings which must not be exceeded.

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-34970699**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Absolute Maximum Ratings

| Parameter  | Symbol         | Device                 | Min.   | Max. | Units | Note |
|--|----------------|------------------------|--|------|-------|------|
| Storage Temperature*   | $T_S$          |                        | -55  | 125  | °C    |      |
| Operating Temperature*   | $T_A$          | 8-Pin DIP<br>SO-8      | -55  | 100  | °C    |      |
|  |                | Widebody               | -55  | 85   |       |      |
| Average Forward Input Current*   | $I_{F(AVG)}$   |                        |  | 25   | mA    | 1    |
| Peak Forward Input Current*<br>(50% duty cycle, 1 ms pulse width)  | $I_{F(PEAK)}$  | 8-Pin DIP<br>SO-8      |  | 50   | mA    | 2    |
|  |                | Widebody               |  | 40   |       |      |
| Peak Transient Input Current*<br>( $\leq 1 \mu s$ pulse width, 300 pps)  | $I_{F(TRANS)}$ | 8-Pin DIP<br>SO-8      |  | 1    | A     |      |
|  |                | Widebody               |  | 0.1  |       |      |
| Reverse LED Input Voltage* (Pin 3-2)   | $V_R$          | 8-Pin DIP<br>SO-8      |  | 5    | V     |      |
|  |                | Widebody               |  | 3    |       |      |
| Input Power Dissipation*   | $P_{IN}$       | 8-Pin DIP<br>SO-8      |  | 45   | mW    | 3    |
|  |                | Widebody               |  | 40   |       |      |
| Average Output Current* (Pin 6)  | $I_{O(AVG)}$   |                        |  | 8    | mA    |      |
| Peak Output Current*   | $I_{O(PEAK)}$  |                        |  | 16   | mA    |      |
| Emitter-Base Reverse Voltage*<br>(Pin 5-7, except 4502/3, 0452/3)  | $V_{EBR}$      |                        |  | 5    | V     |      |
| Supply Voltage (Pin 8-5)   | $V_{CC}$       |                        | -0.5   | 30   | V     |      |
| Output Voltage (Pin 6-5)   | $V_O$          |                        | -0.5   | 20   | V     |      |
| Supply Voltage* (Pin 8-5)  | $V_{CC}$       |                        | -0.5   | 15   | V     |      |
| Output Voltage* (Pin 6-5)  | $V_O$          |                        | -0.5   | 15   | V     |      |
| Base Current* (Pin 7, except 4502/3, 0452/3)   | $I_B$          |                        |  | 5    | mA    |      |
| Output Power Dissipation*  | $P_O$          |                        |  | 100  | mW    | 4    |
| Lead Solder Temperature*<br>(Through-Hole Parts Only)<br>1.6 mm below seating plane, 10 seconds<br>up to seating plane, 10 seconds | $T_{LS}$       | 8-Pin DIP              |  | 260  | °C    |      |
|  |                | Widebody               |  | 260  | °C    |      |
| Reflow Temperature Profile   | $T_{RP}$       | SO-8 and<br>Option 300 | See <b>Package Outline Drawings</b><br>section |      |       |      |

\*Data has been registered with JEDEC for the 6N135/6N136.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Electrical Specifications (DC)

Over recommended temperature ( $T_A = 0^\circ\text{C}$  to  $70^\circ\text{C}$ ) unless otherwise specified. See note 13.

| Parameter                                  | Symbol                    | Device      | Min. | Typ.** | Max. | Units                      | Test Conditions   |                              |  | Fig.  | Note  |
|--|---------------------------|-------------|------|--------|------|----------------------------|---|------------------------------|--|-------|-------|
| Current                                    | CTR*                      | 6N135       | 7    | 18     | 50   | %                          | $T_A = 25^\circ\text{C}$                                    | $V_o = 0.4\text{V}$          | $I_F = 16\text{mA}$                      | 1, 2, | 5, 11 |
| Transfer Ratio                             |                           | HCPL-0500   | 5    | 19     |      |                            |   | $V_o = 0.5\text{V}$          | $V_{CC} = 4.5\text{V}$                   | 4     |       |
|  |                           | HCNW135     |      |        |      |                            |   |                              |  |       |       |
|  |                           | HCPL-2502   | 15   |        | 22   |                            | $T_A = 25^\circ\text{C}$                                    | $V_o = 0.4\text{V}$          |  |       |       |
|  |                           |             | 15   | 25     |      |                            |   | $V_o = 0.5\text{V}$          |  |       |       |
|  |                           | 6N136       | 19   | 24     | 50   |                            | $T_A = 25^\circ\text{C}$                                    | $V_o = 0.4\text{V}$          |  |       |       |
|  |                           | HCPL-4502/3 |      | 15     | 25   |                            |   | $V_o = 0.5\text{V}$          |  |       |       |
|  |                           | HCPL-0501   |      |        |      |                            |   |                              |  |       |       |
|  |                           | HCPL-0452/3 |      |        |      |                            |   |                              |  |       |       |
|  |                           | HCNW136     |      |        |      |                            |   |                              |  |       |       |
|  |                           | HCNW4502/3  |      |        |      |                            |   |                              |  |       |       |
| Logic Low Output Voltage                   | $V_{OL}$                  | 6N135       |      | 0.1    | 0.4  | V                          | $T_A = 25^\circ\text{C}$                                    | $I_o = 1.1\text{mA}$         | $I_F = 16\text{mA}$                      |       |       |
|  |                           | HCPL-0500   |      | 0.1    | 0.5  |                            |   | $I_o = 0.8\text{mA}$         | $V_{CC} = 4.5\text{V}$                   |       |       |
|  |                           | HCNW135     |      |        |      |                            |   |                              |  |       |       |
|  |                           | 6N136       |      | 0.1    | 0.4  |                            | $T_A = 25^\circ\text{C}$                                    | $I_o = 3.0\text{mA}$         |  |       |       |
|  |                           | HCPL-2502   |      | 0.1    | 0.5  |                            |   | $I_o = 2.4\text{mA}$         |  |       |       |
|  |                           | HCPL-4502/3 |      |        |      |                            |   |                              |  |       |       |
|  |                           | HCPL-0501   |      |        |      |                            |   |                              |  |       |       |
|  |                           | HCPL-0452/3 |      |        |      |                            |   |                              |  |       |       |
| Logic High Output Current                  | $I_{OH}^*$                |             |      | 0.003  | 0.5  | $\mu\text{A}$              | $T_A = 25^\circ\text{C}$                                    | $V_o = V_{CC} = 5.5\text{V}$ | $I_F = 0\text{mA}$                       | 7     |       |
|  |                           |             |      | 0.01   | 1    |                            | $T_A = 25^\circ\text{C}$                                    | $V_o = V_{CC} = 15\text{V}$  |  |       |       |
|  |                           |             |      |        | 50   |                            |   | $V_o = V_{CC} = 15\text{V}$  |  |       |       |
| Logic Low Supply Current                   | $I_{CLL}$                 |             |      | 50     | 200  | $\mu\text{A}$              | $I_F = 16\text{mA}, V_o = \text{Open}, V_{CC} = 15\text{V}$ |                              |  | 13    |       |
|  |                           |             |      |        |      |                            |   |                              |  |       |       |
| Logic High Supply Current                  | $I_{CCH}^*$               |             |      | 0.02   | 1    | $\mu\text{A}$              | $T_A = 25^\circ\text{C}$                                    | $I_F = 16\text{mA}$          | $V_o = \text{Open}, V_{CC} = 15\text{V}$ | 13    |       |
|  |                           |             |      |        | 2    |                            |   |                              |  |       |       |
| Input Forward Voltage                      | $V_F^*$                   | 8-Pin DIP   |      | 1.5    | 1.7  | V                          | $T_A = 25^\circ\text{C}$                                    | $I_F = 16\text{mA}$          |  | 3     |       |
|  |                           | SO-8        |      |        | 1.8  |                            |   |                              |  |       |       |
|  |                           | Widebody    | 1.45 | 1.68   | 1.85 |                            | $T_A = 25^\circ\text{C}$                                    | $I_F = 16\text{mA}$          |  |       |       |
|  |                           |             | 1.35 | 1.95   |      |                            |   |                              |  |       |       |
| Input Reverse Breakdown Voltage            | $BV_R^*$                  | 8-Pin DIP   | 5    |        |      | V                          | $I_R = 10\mu\text{A}$                                       |                              |  |       |       |
|  |                           | SO-8        |      |        |      |                            |   |                              |  |       |       |
|  |                           | Widebody    | 3    |        |      |                            |   | $I_R = 100\mu\text{A}$       |  |       |       |
| Temperature Coefficient of Forward Voltage | $\Delta V_F / \Delta T_A$ | 8-Pin DIP   |      | -1.6   |      | $\text{mV}/^\circ\text{C}$ | $I_F = 16\text{mA}$   |                              |  |       |       |
|  |                           | SO-8        |      |        |      |                            |   |                              |  |       |       |
|  |                           | Widebody    |      | -1.9   |      |                            |   |                              |  |       |       |
| Input Capacitance                          | $C_{IN}$                  | 8-Pin DIP   |      | 60     |      | pF                         | $f = 1\text{MHz}, V_F = 0\text{V}$                          |                              |  |       |       |
|  |                           | SO-8        |      |        |      |                            |   |                              |  |       |       |
|  |                           | Widebody    |      | 90     |      |                            |   |                              |  |       |       |
| Transistor DC Current Gain                 | $h_{FE}$                  | 8-Pin DIP   |      | 150    |      |                            | $V_o = 5\text{V}, I_o = 3\text{mA}$                         |                              |  |       |       |
|  |                           | SO-8        |      | 130    |      |                            | $V_o = 0.4\text{V}, I_R = 20\mu\text{A}$                    |                              |  |       |       |
|  |                           |             |      | 180    |      |                            | $V_o = 0.4\text{V}, I_R = 20\mu\text{A}$                    |                              |  |       |       |
|  |                           | Widebody    |      | 160    |      |                            | $V_o = 5\text{V}, I_o = 3\text{mA}$                         |                              |  |       |       |

\*For JEDEC registered parts.

\*\*All typicals at  $T_A = 25^\circ\text{C}$ .

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Switching Specifications (AC)

Over recommended temperature ( $T_A = 0^\circ\text{C}$  to  $70^\circ\text{C}$ ),  $V_{CC} = 5\text{ V}$ ,  $I_F = 16\text{ mA}$  unless otherwise specified.

| Parameter   | Sym.               | Device  | Min. | Typ.** | Max. | Units                   | Test Conditions   | Fig.     | Note    |
|---|--------------------|---|------|--------|------|-------------------------|---|----------|---------|
| Propagation Delay Time to Logic Low at Output             | $t_{\text{PHL}}^*$ | 6N135   |      | 0.2    | 1.5  | $\mu\text{s}$           | $T_A = 25^\circ\text{C}$ $R_L = 4.1\text{ k}\Omega$   | 5, 6, 11 | 8, 9    |
|   |                    | HCPL-0500<br>HCNW135                            |      |        | 2.0  |                         |   |          |         |
|   |                    | 6N136   |      | 0.2    | 0.8  |                         | $T_A = 25^\circ\text{C}$ $R_L = 1.9\text{ k}\Omega$   |          |         |
|   |                    | HCPL-2502                                       |      |        |      |                         |   |          |         |
|   |                    | HCPL-4502/3                                     |      |        |      |                         |   |          |         |
|   |                    | HCPL-0501                                       |      |        |      |                         |   |          |         |
|   |                    | HCPL-0452/3                                     |      |        | 1.0  |                         |   |          |         |
|   |                    | HCNW136<br>HCNW4502/3                           |      |        |      |                         |   |          |         |
| Propagation Delay Time to Logic High at Output            | $t_{\text{PLH}}^*$ | 6N135   |      | 1.3    | 1.5  | $\mu\text{s}$           | $T_A = 25^\circ\text{C}$ $R_L = 4.1\text{ k}\Omega$   | 5, 6, 11 | 8, 9    |
|   |                    | HCPL-0500<br>HCNW135                            |      |        | 2.0  |                         |   |          |         |
|   |                    | 6N136   |      | 0.6    | 0.8  |                         | $T_A = 25^\circ\text{C}$ $R_L = 1.9\text{ k}\Omega$   |          |         |
|   |                    | HCPL-2502                                       |      |        |      |                         |   |          |         |
|   |                    | HCPL-4502/3                                     |      |        |      |                         |   |          |         |
|   |                    | HCPL-0501                                       |      |        |      |                         |   |          |         |
|   |                    | HCPL-0452/3                                     |      |        | 1.0  |                         |   |          |         |
|   |                    | HCNW136<br>HCNW4502/3                           |      |        |      |                         |   |          |         |
| Common Mode Transient Immunity at Logic High Level Output | $ CM_H $           | 6N135   | 1    |        |      | $\text{kV}/\mu\text{s}$ | $R_L = 4.1\text{ k}\Omega$ $I_F = 0\text{ mA}$ , $T_A = 25^\circ\text{C}$ ,<br>$V_{CM} = 10\text{ V}_{\text{p-p}}$<br>$C_L = 15\text{ pF}$    | 12       | 7, 8, 9 |
|   |                    | HCPL-0500<br>HCNW135                            |      | 1      |      |                         |   |          |         |
|   |                    | 6N136   | 1    |        |      |                         | $R_L = 1.9\text{ k}\Omega$  |          |         |
|   |                    | HCPL-2502                                       |      | 1      |      |                         |   |          |         |
|   |                    | HCPL-4502<br>HCPL-0501<br>HCPL-0452<br>HCNW4502 |      |        |      |                         |   |          |         |
|   |                    | HCPL-4503<br>HCPL-0453<br>HCNW4503              | 15   | 30     |      |                         | $R_L = 1.9\text{ k}\Omega$ $I_F = 0\text{ mA}$ , $T_A = 25^\circ\text{C}$ ,<br>$V_{CM} = 1500\text{ V}_{\text{p-p}}$<br>$C_L = 15\text{ pF}$  |          |         |
| Common Mode Transient Immunity at Logic Low Level Output  | $ CM_L $           | 6N135   | 1    |        |      | $\text{kV}/\mu\text{s}$ | $R_L = 4.1\text{ k}\Omega$ $I_F = 16\text{ mA}$ , $T_A = 25^\circ\text{C}$ ,<br>$V_{CM} = 10\text{ V}_{\text{p-p}}$<br>$C_L = 15\text{ pF}$   | 12       | 7, 8, 9 |
|   |                    | HCPL-0500<br>HCNW135                            |      | 1      |      |                         |   |          |         |
|   |                    | 6N136   | 1    |        |      |                         | $R_L = 1.9\text{ k}\Omega$  |          |         |
|   |                    | HCPL-2502                                       |      | 1      |      |                         |   |          |         |
|   |                    | HCPL-4502<br>HCPL-0501<br>HCPL-0452<br>HCNW4502 |      |        |      |                         |   |          |         |
|   |                    | HCPL-4503<br>HCPL-0453<br>HCNW4503              | 15   | 30     |      |                         | $R_L = 1.9\text{ k}\Omega$ $I_F = 16\text{ mA}$ , $T_A = 25^\circ\text{C}$ ,<br>$V_{CM} = 1500\text{ V}_{\text{p-p}}$<br>$C_L = 15\text{ pF}$ |          |         |
| Bandwidth   | BW                 | 6N135/6<br>HCPL-2502<br>HCPL-0500/1             |      | 9      |      | MHz                     | See Test Circuit  | 8, 10    | 10      |
|   |                    | HCNW135/6                                       |      | 11     |      |                         |   |          |         |
|   |                    |   |      |        |      |                         |   |          |         |
|   |                    |   |      |        |      |                         |   |          |         |

\*For JEDEC registered parts.

\*\*All typicals at  $T_A = 25^\circ\text{C}$ .

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-34970699**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Package Characteristics

Over recommended temperature ( $T_A = 0^\circ\text{C}$  to  $70^\circ\text{C}$ ) unless otherwise specified.

| Parameter                                  | Sym.      | Device                 | Min.      | Typ.*     | Max. | Units         | Test Conditions  | Fig.  | Note      |
|--|-----------|------------------------|-----------|-----------|------|---------------|--|-------|-----------|
| Input-Output Momentary Withstand Voltage** | $V_{ISO}$ | 8-Pin DIP              | 3750      |           |      | V rms         | RH < 50%,<br>t = 1 min.,<br>$T_A = 25^\circ\text{C}$                         | 6, 14 |           |
|  |           | SO-8                   |           |           |      |               |  |       | 6, 15     |
|  |           | Widebody               | 5000      |           |      |               |  |       |           |
|  |           | 8-Pin DIP (Option 020) | 5000      |           |      |               |  |       | 6, 12, 15 |
|  | $I_{I-O}$ | 8-Pin DIP              |           |           | 1    | $\mu\text{A}$ | 45% RH, t = 5 s,<br>$V_{I-O} = 3 \text{ kVdc}$ ,<br>$T_A = 25^\circ\text{C}$ |       | 6, 16     |
| Input-Output Resistance                    | $R_{I-O}$ | 8-Pin DIP              |           | $10^{12}$ |      | $\Omega$      | $V_{I-O} = 500 \text{ Vdc}$  |       | 6         |
|  |           | SO-8                   |           |           |      |               |  |       |           |
|  |           | Widebody               | $10^{12}$ | $10^{13}$ |      |               | $T_A = 25^\circ\text{C}$   |       |           |
|  |           |                        | $10^{11}$ |           |      |               | $T_A = 100^\circ\text{C}$  |       |           |
| Input-Output Capacitance                   | $C_{I-O}$ | 8-Pin DIP              |           | 0.6       |      | pF            | f = 1 MHz  |       | 6         |
|  |           | SO-8                   |           |           |      |               |  |       |           |
|  |           | Widebody               |           | 0.5       | 0.6  |               |  |       |           |

\*All typicals at  $T_A = 25^\circ\text{C}$ .

\*\*The Input-Output Momentary Withstand Voltage is a dielectric voltage rating that should not be interpreted as an input-output continuous voltage rating. For the continuous voltage rating refer to the IEC/EN/DIN EN 60747-5-2 Insulation Related Characteristics Table (if applicable), your equipment level safety specification or Avago Application Note 1074 entitled "Optocoupler Input-Output Endurance Voltage," publication number 5963-2203E.

### Notes:

- Derate linearly above  $70^\circ\text{C}$  free-air temperature at a rate of  $0.8 \text{ mA}/^\circ\text{C}$  (8-Pin DIP). Derate linearly above  $85^\circ\text{C}$  free-air temperature at a rate of  $0.5 \text{ mA}/^\circ\text{C}$  (SO-8).
- Derate linearly above  $70^\circ\text{C}$  free-air temperature at a rate of  $1.6 \text{ mA}/^\circ\text{C}$  (8-Pin DIP). Derate linearly above  $85^\circ\text{C}$  free-air temperature at a rate of  $1.0 \text{ mA}/^\circ\text{C}$  (SO-8).
- Derate linearly above  $70^\circ\text{C}$  free-air temperature at a rate of  $0.9 \text{ mW}/^\circ\text{C}$  (8-Pin DIP). Derate linearly above  $85^\circ\text{C}$  free-air temperature at a rate of  $1.1 \text{ mW}/^\circ\text{C}$  (SO-8).
- Derate linearly above  $70^\circ\text{C}$  free-air temperature at a rate of  $2.0 \text{ mW}/^\circ\text{C}$  (8-Pin DIP). Derate linearly above  $85^\circ\text{C}$  free-air temperature at a rate of  $2.3 \text{ mW}/^\circ\text{C}$  (SO-8).
- CURRENT TRANSFER RATIO in percent is defined as the ratio of output collector current,  $I_{OV}$ , to the forward LED input current,  $I_F$ , times 100.
- Device considered a two-terminal device: Pins 1, 2, 3, and 4 shorted together and Pins 5, 6, 7, and 8 shorted together.
- Common mode transient immunity in a Logic High level is the maximum tolerable (positive)  $dV_{CM}/dt$  on the leading edge of the common mode pulse signal,  $V_{CM}$ , to assure that the output will remain in a Logic High state (i.e.,  $V_O > 2.0 \text{ V}$ ). Common mode transient immunity in a Logic Low level is the maximum tolerable (negative)  $dV_{CM}/dt$  on the trailing edge of the common mode pulse signal,  $V_{CM}$ , to assure that the output will remain in a Logic Low state (i.e.,  $V_O < 0.8 \text{ V}$ ).
- The  $1.9 \text{ k}\Omega$  load represents 1 TTL unit load of  $1.6 \text{ mA}$  and the  $5.6 \text{ k}\Omega$  pull-up resistor.
- The  $4.1 \text{ k}\Omega$  load represents 1 LSTTL unit load of  $0.36 \text{ mA}$  and  $6.1 \text{ k}\Omega$  pull-up resistor.
- The frequency at which the ac output voltage is 3 dB below its mid-frequency value.
- The JEDEC registration for the 6N136 specifies a minimum CTR of 15%. Avago guarantees a minimum CTR of 19%.
- See Option 020 data sheet for more information.
- Use of a  $0.1 \mu\text{F}$  bypass capacitor connected between pins 5 and 8 is recommended.
- In accordance with UL 1577, each optocoupler is proof tested by applying an insulation test voltage  $\geq 4500 \text{ V rms}$  for 1 second (leakage detection current limit,  $I_{I-O} \leq 5 \mu\text{A}$ ). This test is performed before the 100% Production test shown in the IEC/EN/DIN EN 60747-5-2 Insulation Related Characteristics Table if applicable.
- In accordance with UL 1577, each optocoupler is proof tested by applying an insulation test voltage  $\geq 6000 \text{ V rms}$  for 1 second (leakage detection current limit,  $I_{I-O} \leq 5 \mu\text{A}$ ). This test is performed before the 100% Production test shown in the IEC/EN/DIN EN 60747-5-2 Insulation Related Characteristics Table if applicable.
- This rating is equally validated by an equivalent ac proof test.

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-34970699**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

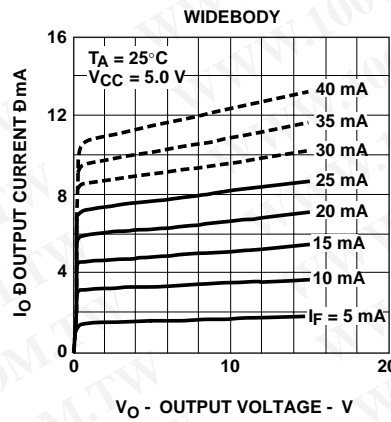
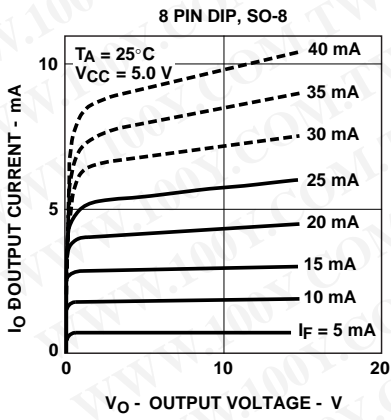


Figure 1. DC and pulsed transfer characteristics.

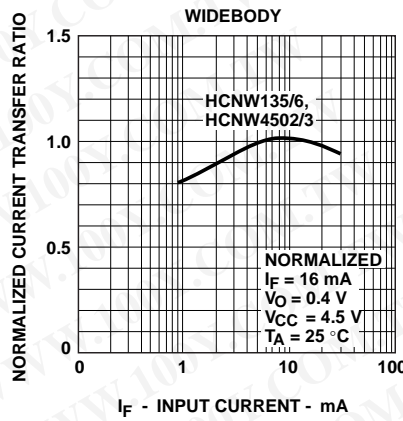
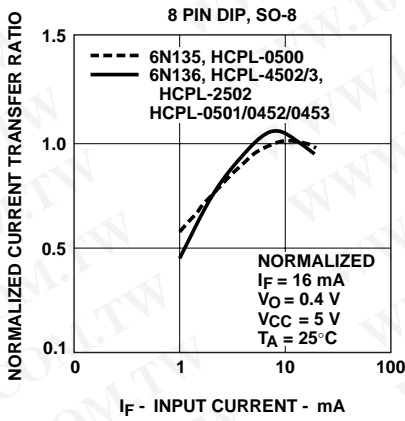


Figure 2. Current transfer ratio vs. input current.

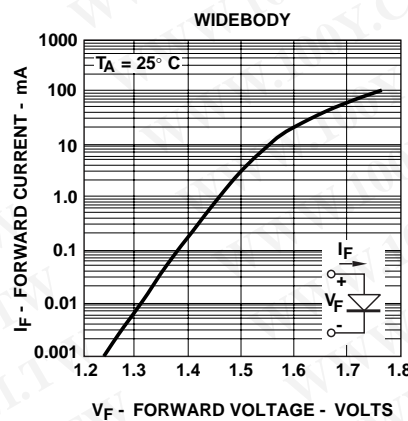
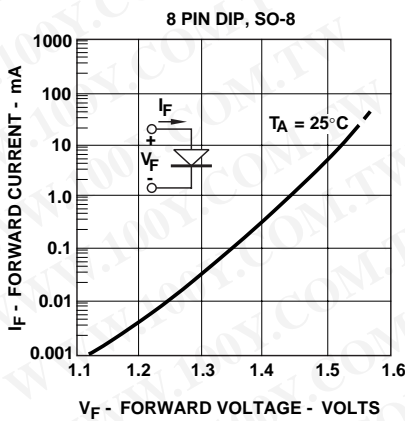


Figure 3. Input current vs. forward voltage.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

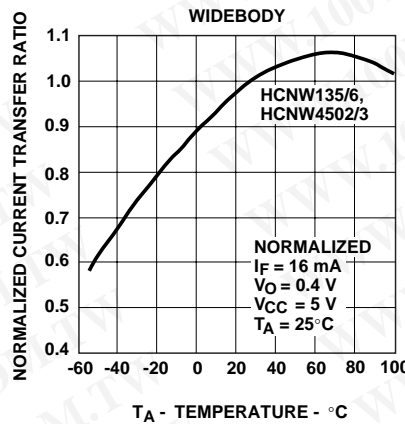
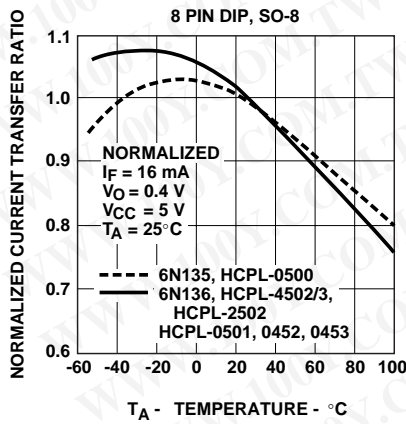


Figure 4. Current transfer ratio vs. temperature.

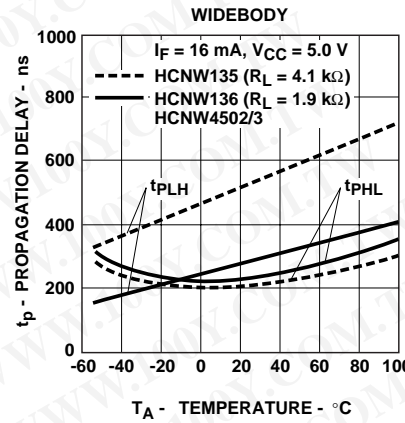
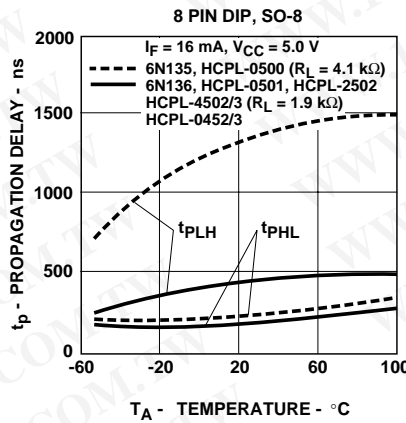


Figure 5. Propagation delay vs. temperature.

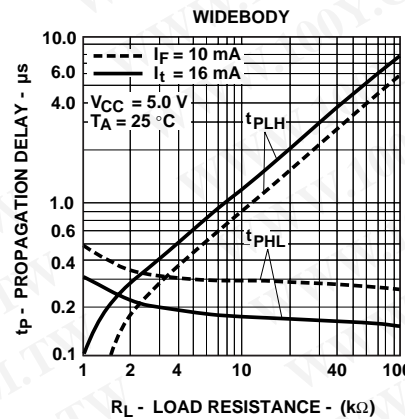
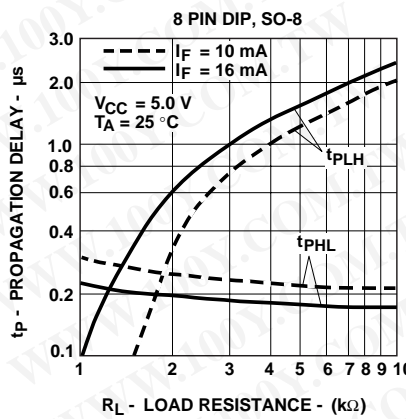


Figure 6. Propagation delay time vs. load resistance.

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-34970699**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

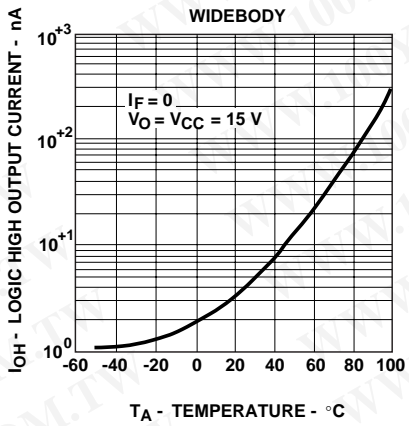
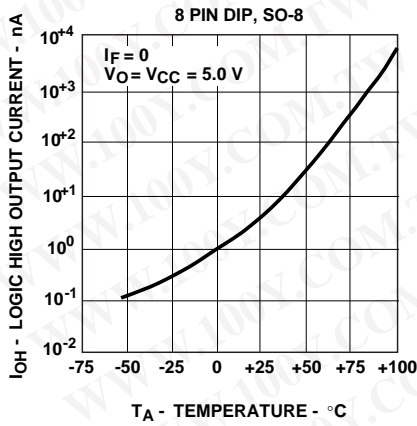


Figure 7. Logic high output current vs. temperature.

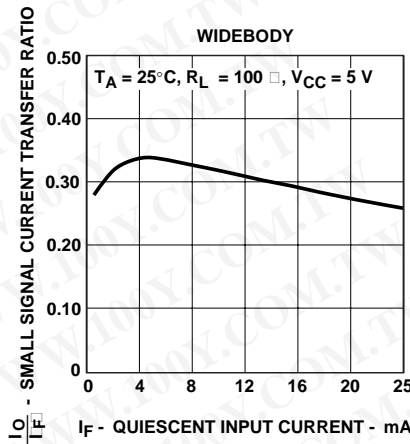
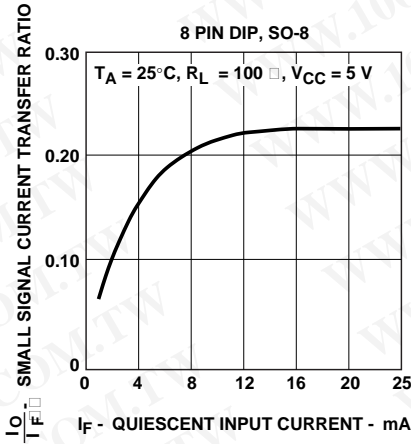


Figure 8. Small-signal current transfer ratio vs. quiescent input current.

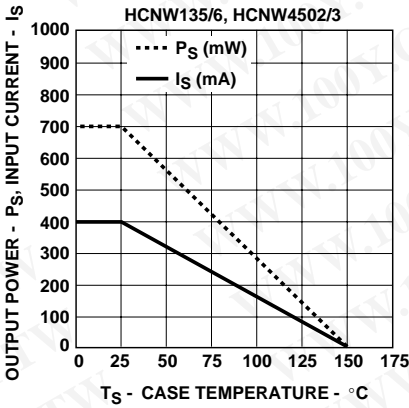
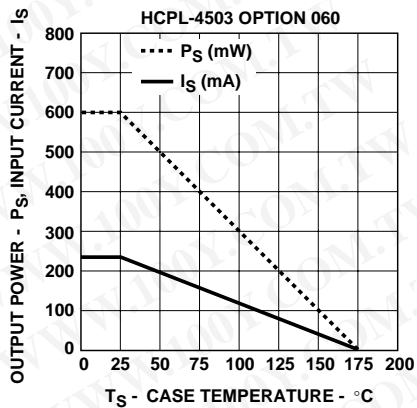


Figure 9. Thermal derating curve, dependence of safety limiting value with case temperature per IEC/EN/DIN EN 60747-5-2.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

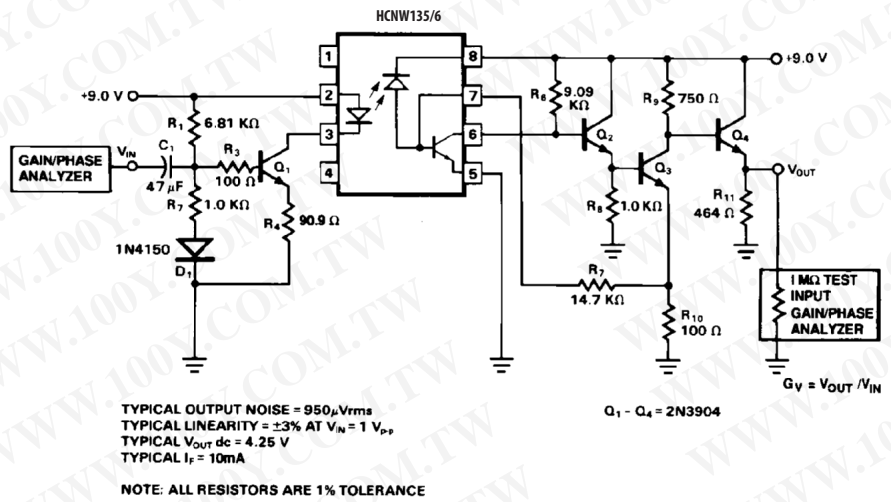
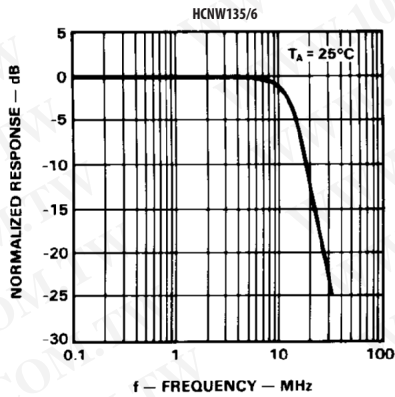
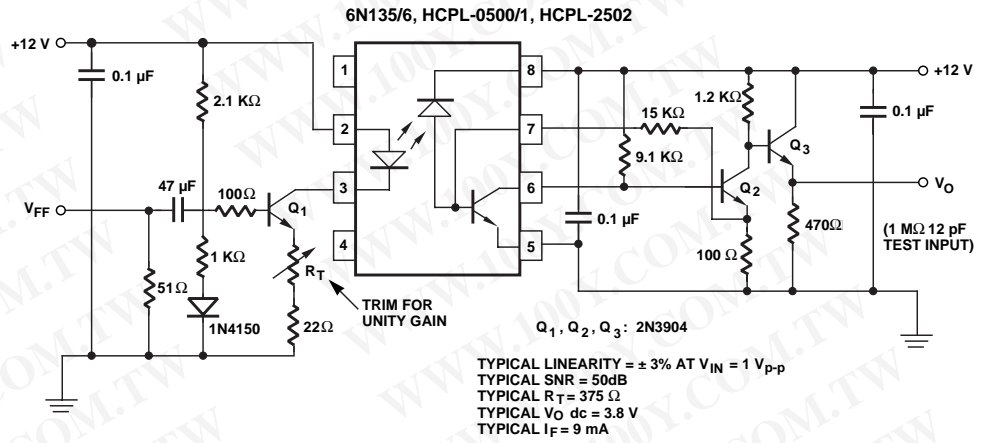
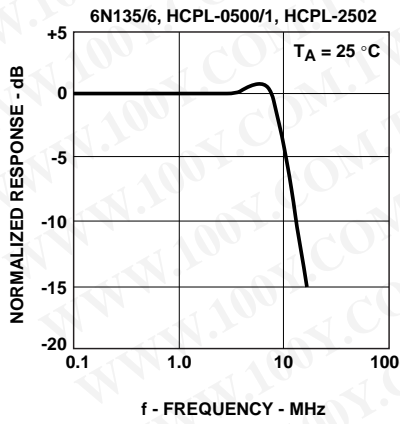


Figure 10. Frequency response.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

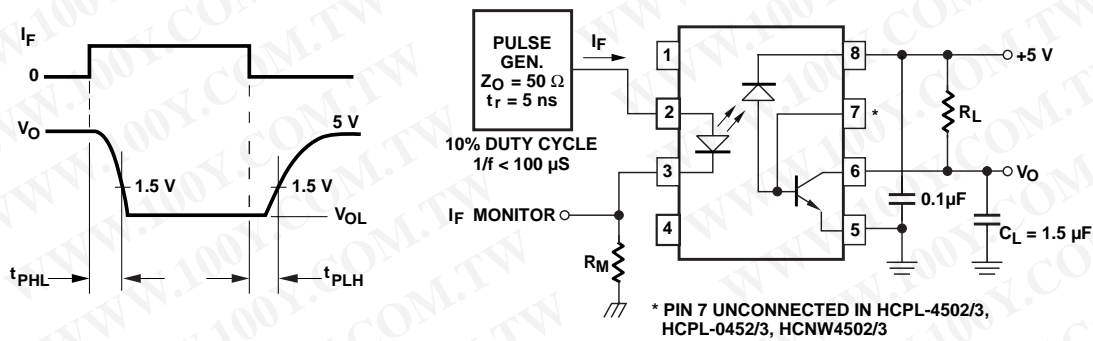


Figure 11. Switching test circuit.

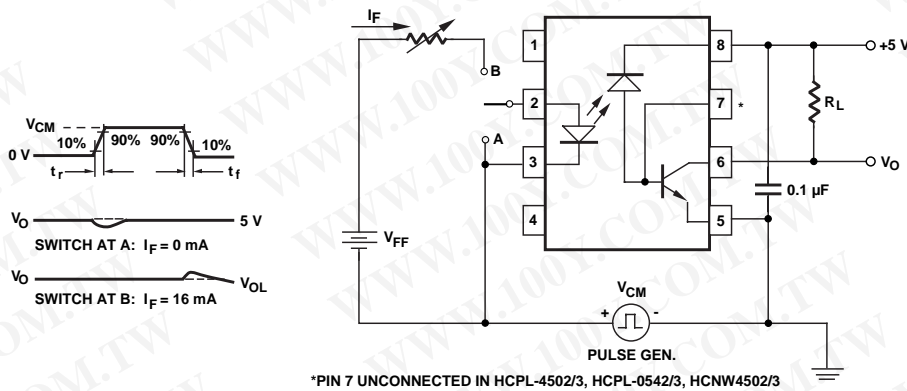


Figure 12. Test circuit for transient immunity and typical waveforms.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

For product information and a complete list of distributors, please go to our website: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies Limited in the United States and other countries.  
 Data subject to change. Copyright © 2007 Avago Technologies Limited. All rights reserved. Obsoletes AV01-0550EN  
 AV02-0171EN March 14, 2007

**AVAGO**  
 TECHNOLOGIES