

TWO LED WITH HOLDER

(LED DIA 4.7 mm VIEW LENS 3.7 mm COLORED DIFFUSION)

FIG.A. H402 X D X D SERIES

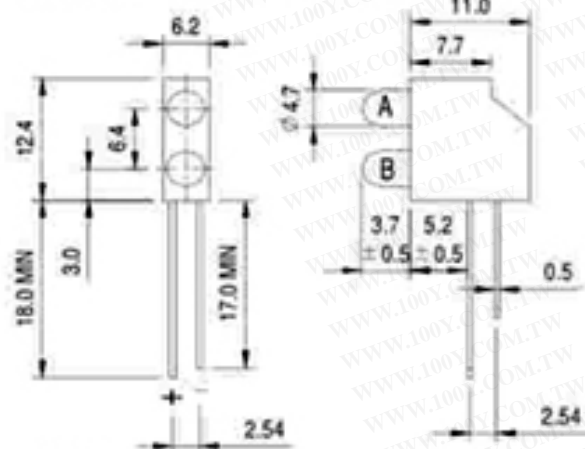


FIG.B. H402 X D X D+ SERIES

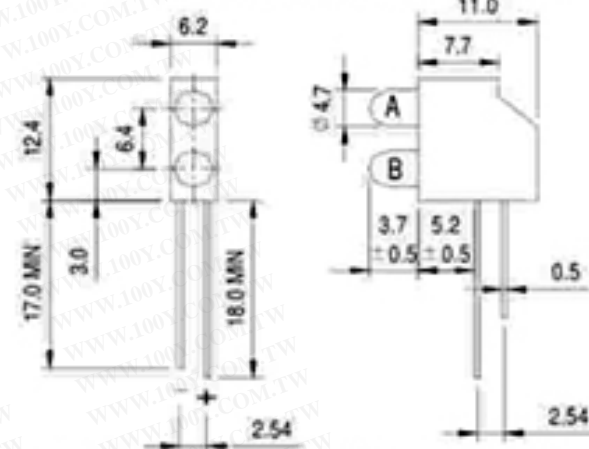


FIG.C. H402 X D X D-3 SERIES


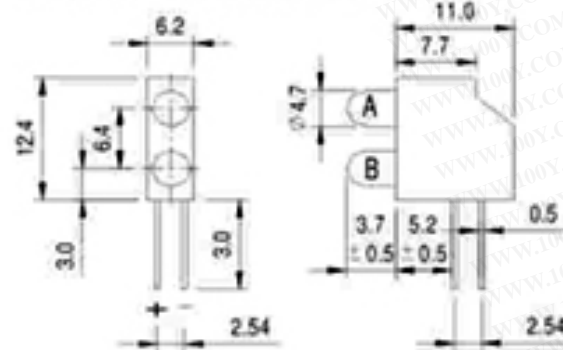


FIG.D. H402 X D X D+3 SERIES

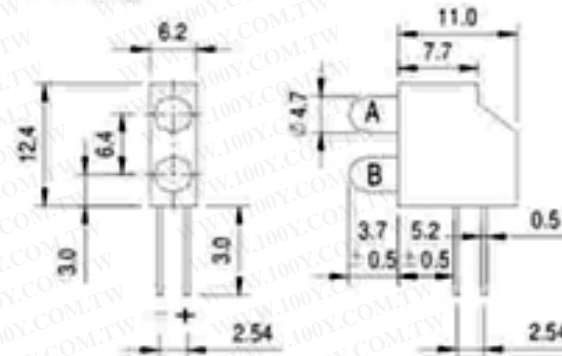

UNIT : mm

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Tester : OPTO Meter Tester : OPTO Meter S370@20mA

Color		Model NO.				WAVE LENGTH	iR may (uA)	VF (V)	LUMINOUS INTENSITY
LED A	LED B	FIG.A.	FIG.B.	FIG.C.	FIG.D				
RED	RED	H402HDHD	H402HDHD+	H402HDHD-3	H402HDHD+3	695	100	2.2V	1.4~3.5
RED	GREEN	H402HDGD	H402HDGD+	H402HDGD-3	H402HDGD+3	695/570	100	2.2V	1.4~3.5
RED	YELLOW	H402HDYD	H402HDYD+	H402HDYD-3	H402HDYD+3	695/600	100	2.2V/2.1V	1.4~3.5
GREEN	GREEN	H402GDGD	H402GDGD+	H402GDGD-3	H402GDGD+3	570	100	2.2V	5.0~12.5
GREEN	RED	H402GDHD	H402GDHD+	H402GDHD-3	H402GDHD+3	570/695	100	2.2V	5.0~12.5
GREEN	YELLOW	H402GDYD	H402GDYD+	H402GDYD-3	H402GDYD+3	570/600	100	2.2V/2.1V	5.0~12.5
YELLOW	YELLOW	H402YDYD	H402YDYD+	H402YDYD-3	H402YDYD+3	600	100	2.1V	5.0~12.5
YELLOW	RED	H402YDHD	H402YDHD+	H402YDHD-3	H402YDHD+3	600/695	100	2.1V/2.2V	5.0~12.5
YELLOW	GREEN	H402YDGD	H402YDGD+	H402YDGD-3	H402YDGD+3	600/570	100	2.1V/2.2V	5.0~12.5
HI-EFF RED	HI-EFF RED	H402EDED	H402EDED+	H402EDED-3	H402EDED+3	635	100	1.8V	5.0~12.5
HI-EFF RED	GREEN	H402EDGD	H402EDGD+	H402EDGD-3	H402EDGD+3	635/570	100	1.8V/2.2V	5.0~12.5
HI-EFF RED	YELLOW	H402EDYD	H402EDYD+	H402EDYD-3	H402EDYD+3	635/600	100	1.8V/2.1V	5.0~12.5
GREEN	HI-EFF RED	H402GDED	H402GDED+	H402GDED-3	H402GDED+3	570/635	100	2.2V/1.8V	5.0~12.5
YELLOW	HI-EFF RED	H402YDED	H402YDED+	H40YDED2-3	H402YDED+3	600/635	100	2.1V/1.8V	5.0~12.5

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)