PART NO：LA504W3CA-1C-01

■ Features:

1. Low power consumption
2. High efficiency
3. Reliable and rugged
4. Chip Material: InGaN
5. Lens Color: Water Clear
6. Source Color: White

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

■ Outline Dimensions:

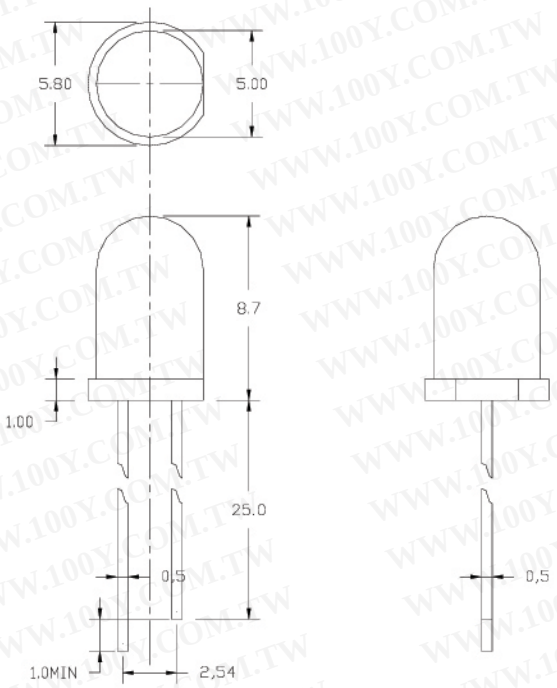

Note：

1. All dimensions are in millimeters (inches)
2. Tolerance is ±0.25mm (.010”) unless otherwise noted
3. Protruded resin under flange is 1.0mm (.04”) max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notices.

■ Absolute Maximum Ratings at Ta=25℃:

Parameter	Maximum	Unit
Power Dissipation	120	mW
Peak Forward Current (1/10 Duty Cycle,0.1ms Pulse Width)	100	mA
Continuous Forward Current	30	mA
Derating Linear From 50℃	0.5	mA/℃
Reverse Voltage	5	V
Operating Temperature Range	-20℃ to + 80℃	
Storage Temperature Range	-40℃ to + 100℃	
Lead Soldering Temperature [4mm(0.175") from body]	260℃ for 5 Seconds	

■ Electrical/Optical Characteristics at Ta=25℃:

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Luminous Intensity	I_v	I_F=20mA	8000	10000		mcd
Viewing Angle	2θ 1/2	I_F=20mA		20		deg
Forward Voltage	V_F	I_F=20mA	2.8	3.2	3.7	V
Reverse Current	I_R	V_R=5V	-	-	10	uA
Color Rendering Index Calculation	Spm	X	0.27	-	0.34	
	Spm	Y	0.27	-	0.34	

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

■ Typical Electrical/Optical Characteristics Curve: (25℃ Ambient Temperature Unless Otherwise Noted)

Fig1. Relative Intensity vs. Wavelength

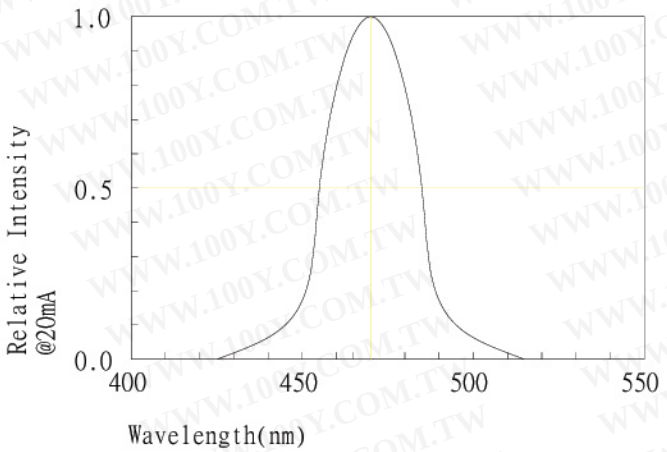

Fig2. Forward Current vs. Forward Voltage

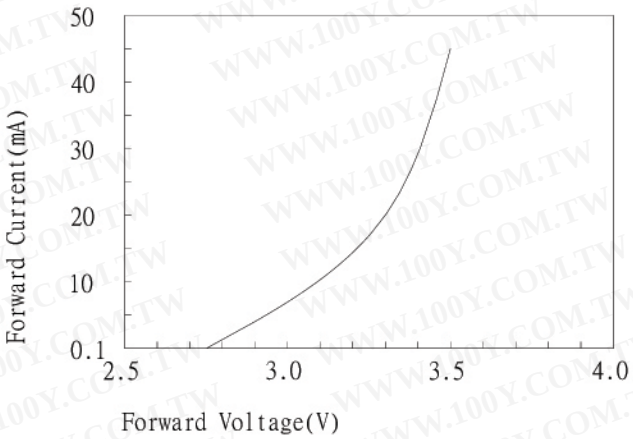

Fig3. Relative Intensity vs. Forward Current

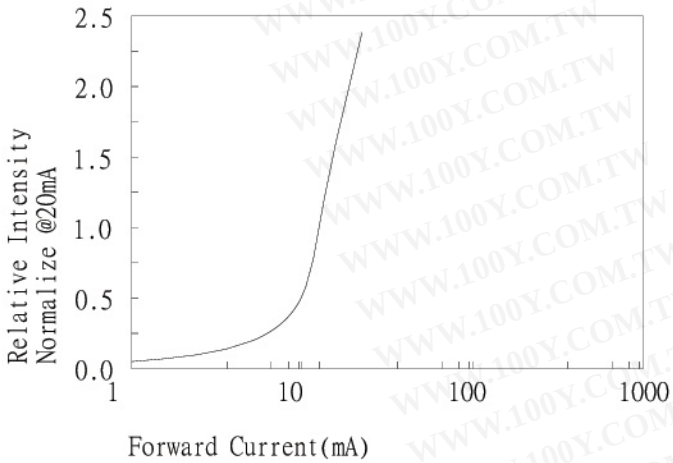

Fig4. Forward Voltage vs. Temperature

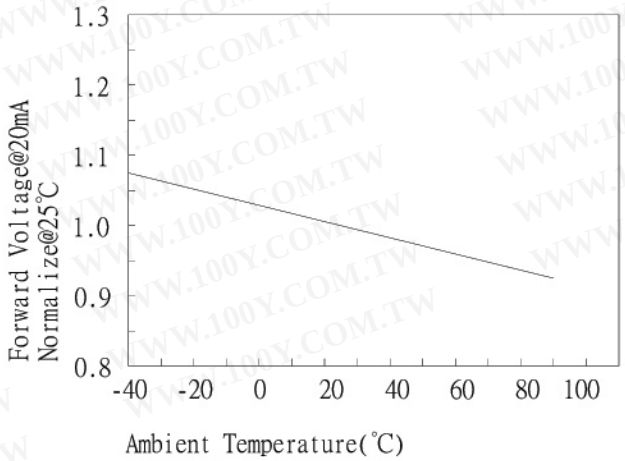

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw