


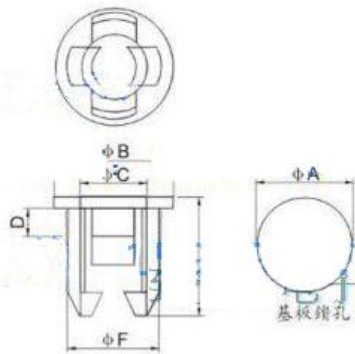

**材 質:** UL合格之NYLON66(本色)  
**用 途:** 用于保護LED立于PC板上, 使高度一致,  
 中間隔板設計, 接腳不會彎曲、折斷、短路  
**防火等級:** 94V-2  
**適用溫度:** -20°C ~ 120°C

**Material:** UL qualified NYLON66(Natural)  
**Usage:** to protect LED over PC board, to make the height consistent;  
 the middle support design to prevent the pins from bend,  
 break and short-circuit.  
**Flame class:** 94V-2  
**Applicable temperature:** -20°C ~ 120°C

單位

| 型號 Item No. | A   | B   | C   | D   | F   | E  |
|-------------|-----|-----|-----|-----|-----|----|
| 长短扣-3       | 4.5 | 5.9 | 3.1 | 1.4 | 5.6 | 4. |
| 长短扣-5       | 6.4 | 7.8 | 5.2 | 1.5 | 7.3 | 6. |

