


Solar Module: MyECO PM30 Series
(PM30/PM35, 6" Polycrystalline Solar Cell, 1/4 4x9 Cells)

Front View

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Technical Drawing

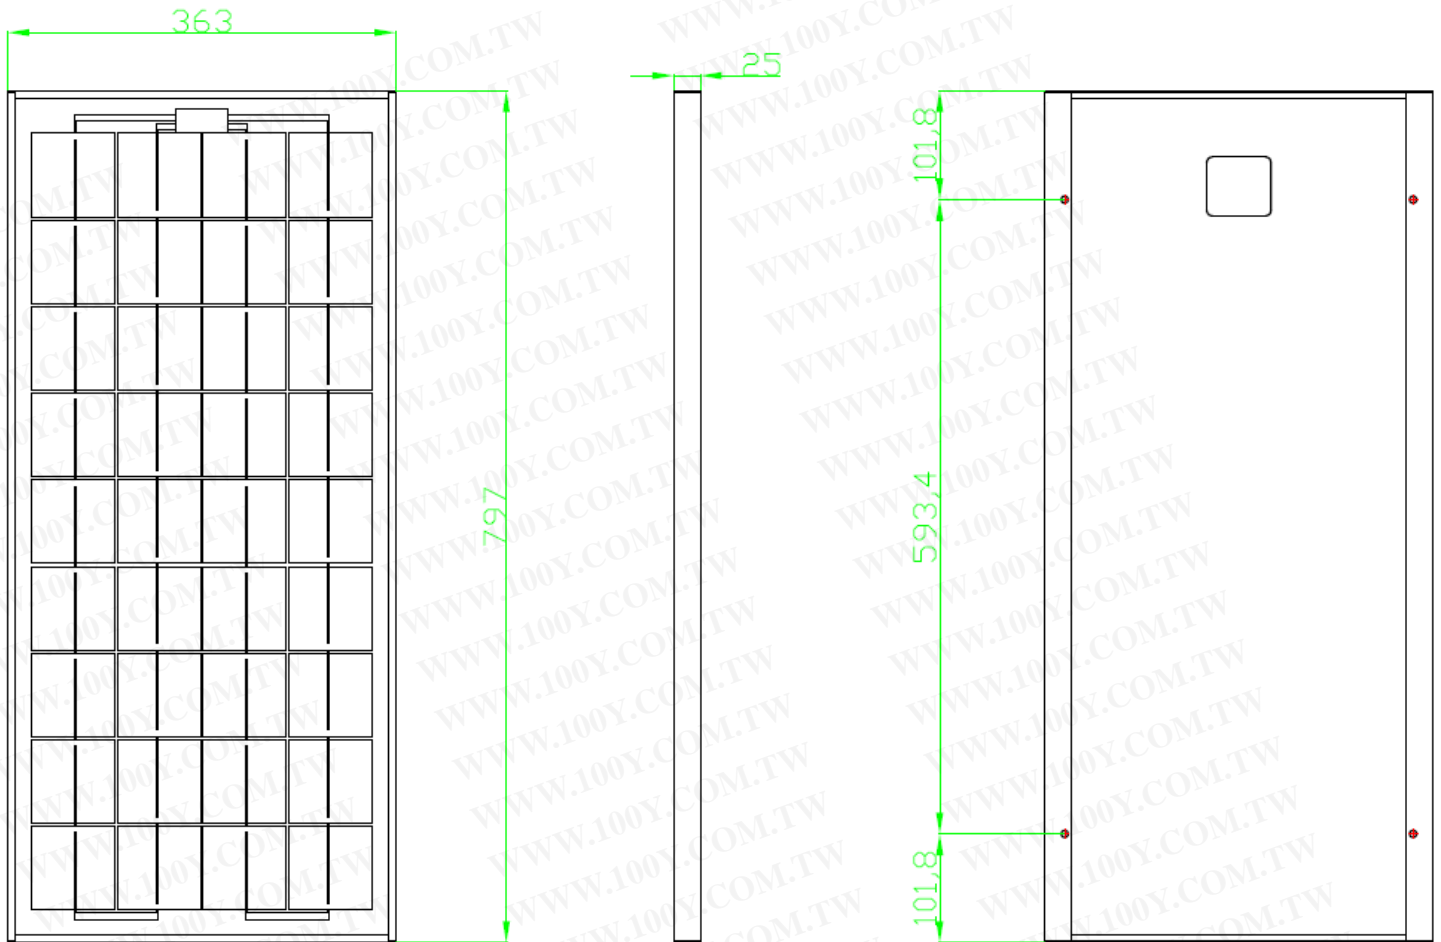

Product Characteristics

Electrical Characteristics: Performance at STC*1

Model Type	PM30	PM35		
Nominal Peak Power, Pmax	30W ± 5%	35W ± 5%		
Peak Power Voltage, Vpm	17.75 V	18.18 V		
Peak Power Current, Ipm	1.80 A	1.90 A		
Open Circuit Voltage, Voc	21.82 V	22.21 V		
Short Circuit Current, Isc	1.93 A	2.04 A		
Module Efficiency	10.37%	12.10%		

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

*STC: Standard Test Condition, 1000W/m², AM 1.5, 25°C

Component materials

Cell Qty per Module	36pcs
Cell Type	Polycrystalline Silicon
Cell Dimensions	78 x 78mm
Laminate Construction	Front: Tempered Glass Encapsulation: Solar Cells Embedded in EVA (Ethylene-Vinyl-Acetate) Rear: Tedlar
Glass	Low-Iron Tempered Glass, 3.2mm
Junction Box	IP65 Junction Box (TUV Certified)
Frame	Anodized Aluminum Frame. Color: Silver

Physical Specifications

Dimension [L x W x H]	797 x 363 x 25 mm
Weight (Kg)	4 Kg

Packing Specifications

Modules Per Carton	2pcs/carton
--------------------	-------------

Current-Voltage Characteristics (I-V Curve) at various irradiance levels

(Data in preparation)

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Performance Warranty

90% Output	10Years
------------	---------

Quality Assurance

Quality Management	ISO 9001:2000 certified
IEC 61215:2005	TÜV certified
EN 61730-1 & EN 61730-2:2007	TÜV certified
1. Electrical Insulation Test	
2. Outdoor Exposure Test	
3. Hot-Spot Endurance Test	
4. UV-exposure	
5. Thermal Cycling Test	

6. Humidity Freeze Test
7. Damp Heat Test
8. Robustness of Terminations Test
9. Wet Leakage Current Test
10. Mechanical Load Test
11. Hail Impact Test
12. Bypass Diode Thermal Test

Features:

The most reliable quality

Good conversion efficiency of solar module

Effectively minimize the power drop by the shade

High-level protection for severe environment

High quality glass provides for less reflection of incoming sunrays

Color of the back sheet: White & Black (custom-made possible)

Made in Taiwan

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Though the technical information has been carefully verified and corrected, error data could still be misplaced within. Above data will be subject to change without prior notice due to actual manufacturing condition and design. Please surf for the latest updates on Ritek website or contact us. Printed in 2009/03