


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Si PIN photodiode S5106, S5107, S7509, S7510

Chip carrier package for surface mount

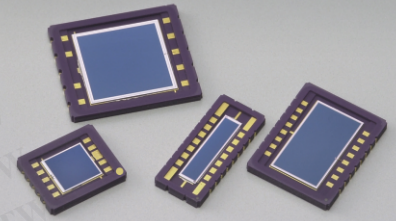

S5106, S5107, S7509 and S7510 are Si PIN photodiodes sealed in chip carrier packages suitable for surface mount using automated solder reflow techniques. These photodiodes have large active areas, making them suitable for spatial light transmission where a wide field-of-view angle is required. Other applications include POS scanners, power meters and analytical instruments.

Features

- Active area
S5106: 5 × 5 mm
S5107: 10 × 10 mm
S7509: 2 × 10 mm
S7510: 6 × 11 mm
- Ceramic chip carrier package for surface mount
- Suitable for solder reflow
- High sensitivity

Applications

- Spatial light transmission
- Laser radar
- Power meter
- Bar-code reader

General ratings / Absolute maximum ratings

Type No.	Dimensional outline/ Window material *	Active area size (mm)	Effective active area (mm ²)	Absolute maximum ratings			
				Reverse voltage VR Max (V)	Power dissipation P (mW)	Operating temperature Topr (°C)	Storage temperature Tstg (°C)
S5106	①/R	5 × 5	25	30	50	-40 to +100	-40 to +125
S5107	②/R	10 × 10	100				
S7509	③/R	2 × 10	20				
S7510	④/R	6 × 11	66				


Electrical and optical characteristics (Typ. Ta=25 °C, unless otherwise noted)

Type No.	Spectral response range λ (nm)	Peak sensitivity wavelength λ_p (nm)	Photo sensitivity S (A/W)				Short circuit current Isc 100 lx (μ A)	Dark current ID VR=10 V		Temp. coefficient of ID TCID (times/°C)	Cut-off frequency fc RL=50 Ω VR=10 V (MHz)	Terminal capacitance Ct f=1 MHz VR=10 V (pF)	NEP VR=10 V $\lambda=\lambda_p$ (W/Hz ^{1/2})
			λ_p	660 nm	780 nm	830 nm		Typ.	Max.				
S5106	320 to 1100	960	0.72	0.45	0.57	0.62	27	0.4	5	1.15	20	40	1.6×10^{-14}
S5107							110	0.9	10		10	150	2.4×10^{-14}
S7509							22	0.5	5		20	40	1.7×10^{-14}
S7510							72	1.0	10		15	80	2.5×10^{-14}

* Window R: Resin coating


Note) S5106, S7509: For mass production, order unit is 100 pieces.
 S5107, S7510: For mass production, order unit is 50 pieces.

■ Spectral response

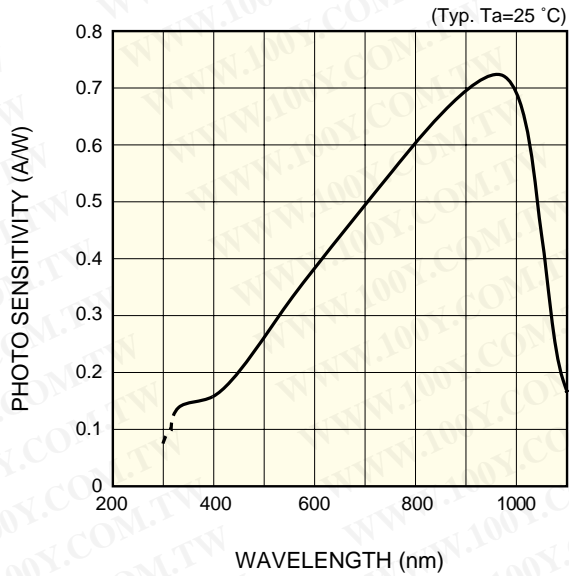


KPINB0166EA

■ Photo sensitivity temperature characteristic

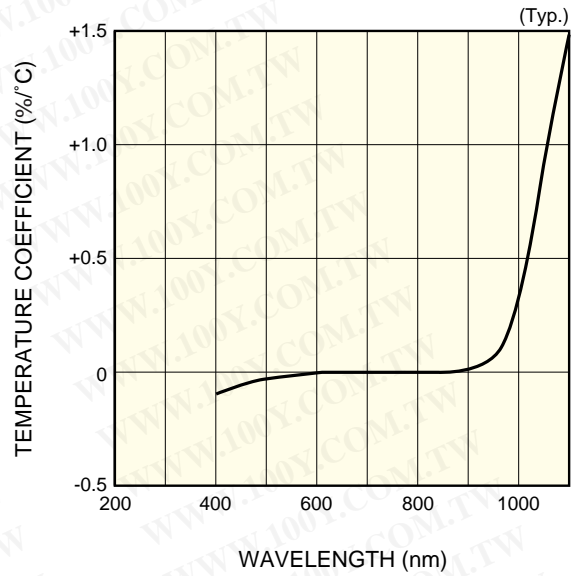


KPINB0093EC

■ Dark current vs. reverse voltage

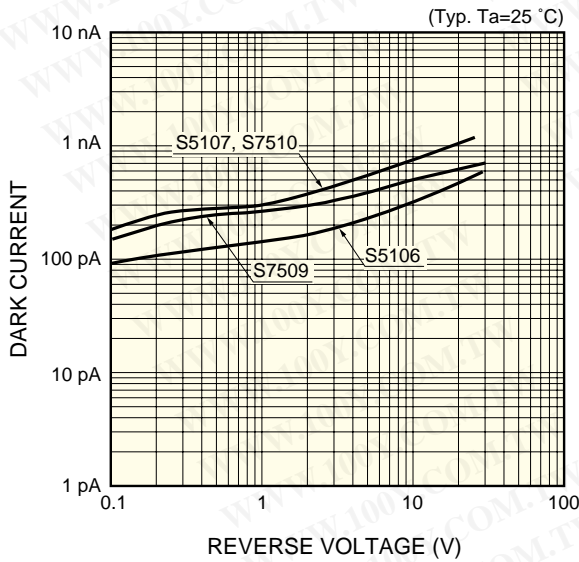

KPINB0166EA


■ Terminal capacitance vs. reverse voltage

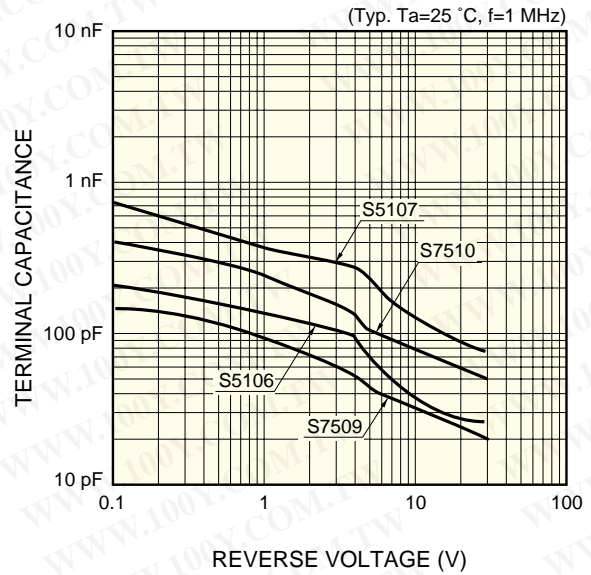

KPINB0128EA

Dimensional outlines (unit: mm)


① S5106

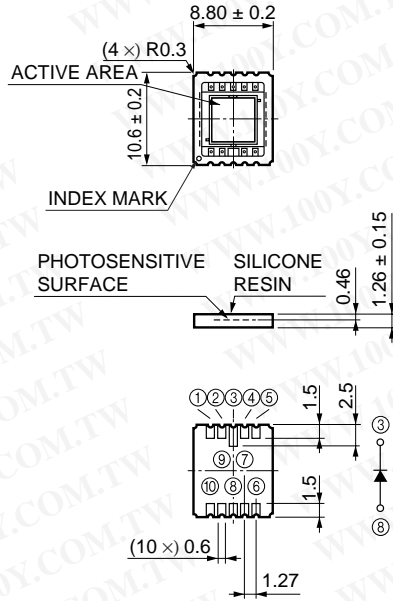

NC (excluding pins ③⑧)
Burr shall protrude no more than 0.3 mm
on any side of package.

KPINA002EF


② S5107

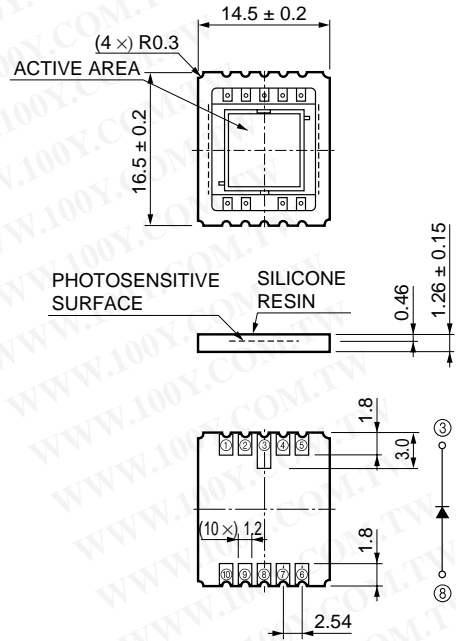

NC (excluding pins ③⑧)
Burr shall protrude no more than 0.3 mm
on any side of package.

KPINA013EC


③ S7509

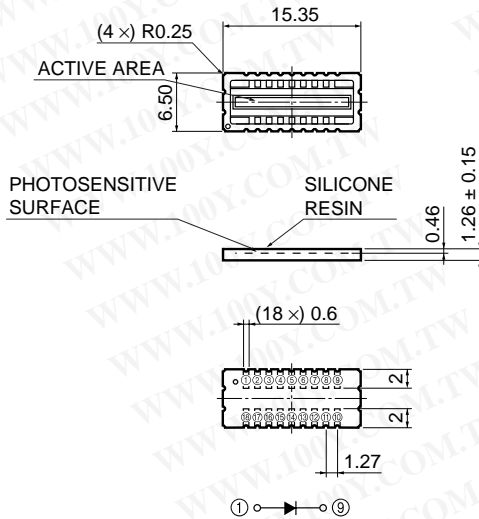

NC (excluding pins ①④)
Burr shall protrude no more than 0.3 mm
on any side of package.

KPINA005EB

④ S7510

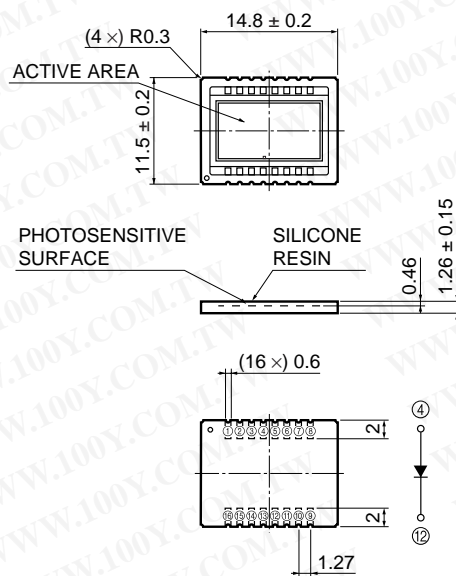

NC (excluding pins ④⑫)
Burr shall protrude no more than 0.3 mm
on any side of package.

KPINA006EB