
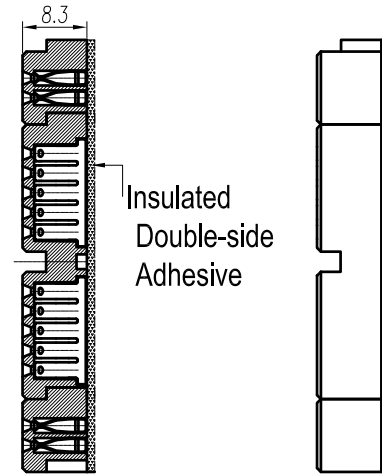


- 一個端子條：630 個插孔
- 兩個分配條：200 個插孔
- 產品尺寸：16.5x5.4x0.85(cm)
- 磷青銅鍍鎳彈簧夾
- 匹配跳線，線徑 0.8mm
- 塑件：ABS
- 用途：實驗、測試
- 特點：可迴圈使用，環保回收  
結構顏色清晰，易於使用  
麵包板可按固定單位拼裝

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	New Publish		

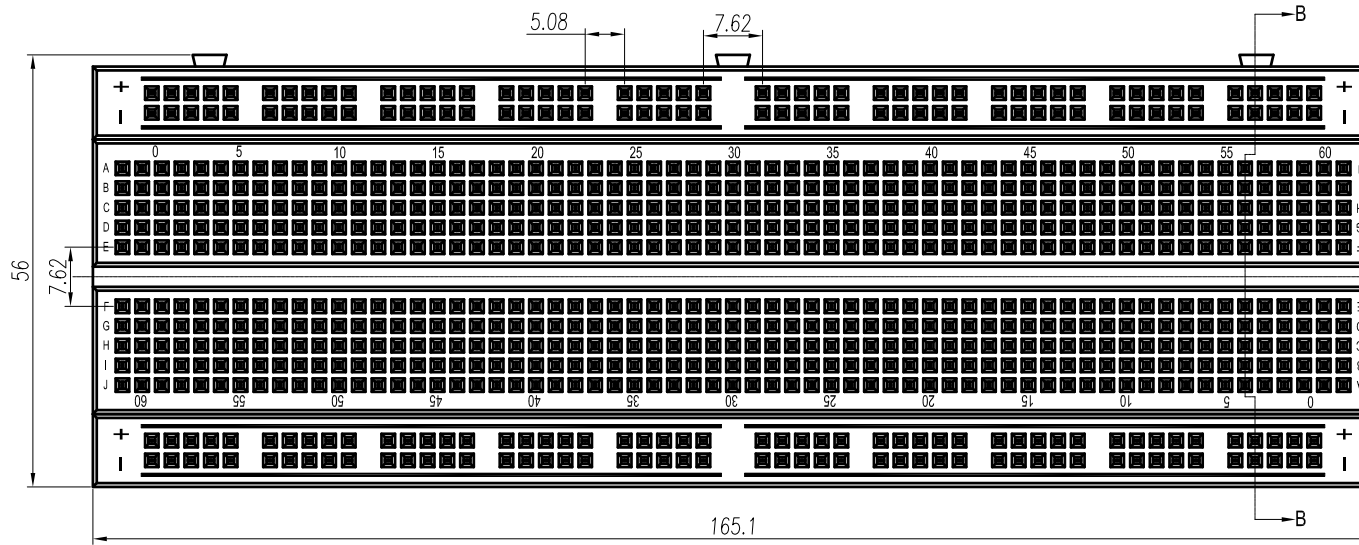


Section B-B

View C

Notes:

1. Pitch: 2.54mm
  - 2.1 Terminal Strip: 630 Tie-point
  - 3.2 Distribution Strips: 200 Tie-point
  4. Rated voltage/current: 300 V / 3-5 A
  5. Insulation resistance: 500MΩ/DC500V
  6. Withstanding voltage: AC1000V/1Min
  7. Wire range: 29~20 AWG
  8. Temp. Range: -25° c~+80° c
- Strip length: 7-8mm



TOLERANCES EXCEPT AS NOTED

variable range	linear dimension				fillet	chamfer		∠short angle sid				≡	—	□	//	⊥	
	to 6	over 6 to 30	over 30 to 120	over 120 to 480		all	to 6	over 6 to 10	to 10	over 10 to 50	over 50 to 120						to 120
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1'	30'	20'	10'	0.5	0.025	0.06	0.12	0.4