

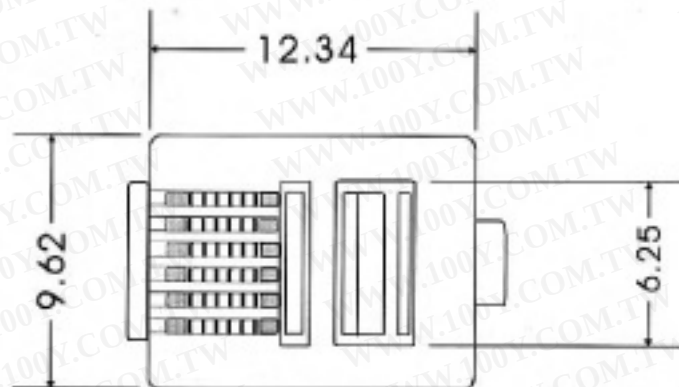
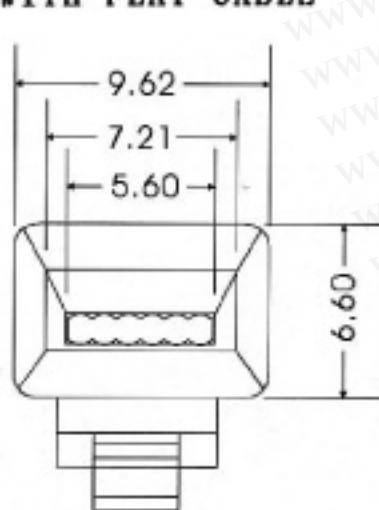


# WITH FLAT CABLE

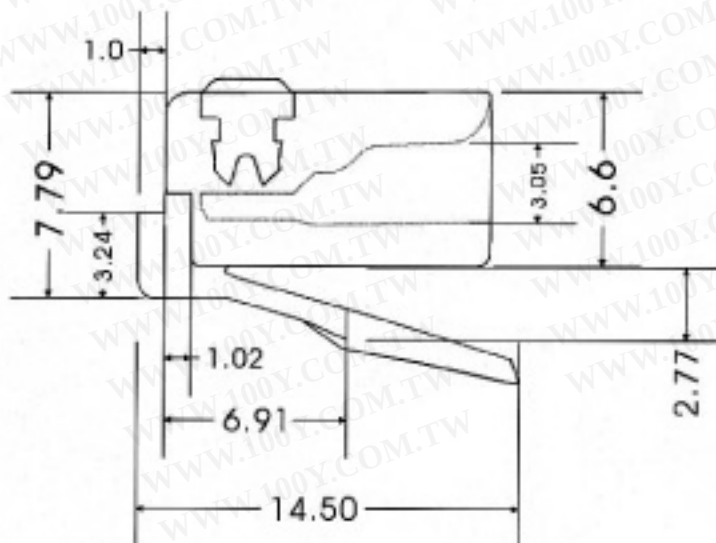

# WITH ROUND CABLE

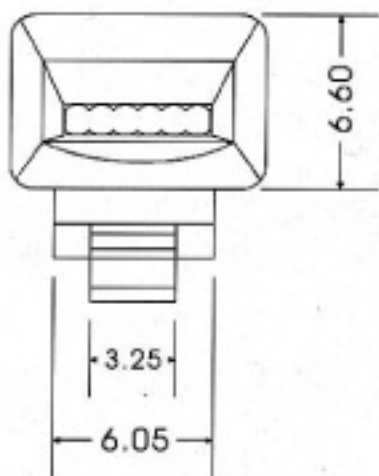

## SPECIFICATIONS:

### 1.ELECTRICAL:


UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.  
DIELECTRIC WITH STANDING VOLTAGE : 500 VOLTS AC.  
INSULATION RESISTANCE: 500  
TERMINATION: RESISTANCE 35 MEGAOHMS.

### 2.MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH : 20 lbs (89N) MIN.  
DURABILITY : 2000 MATING CYCLES.

### 3.MATERIAL & FINISH:

HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.  
COLOR : (TRANSPARENT COLOR AVAILABLE).  
CONTACT BLADE: PHOSPHOR BRONZE  
CONDUCTOR : STRANDED, 24-26 AWG.  
GOLD PLATING: 3-50u" ARE AVAILABLE

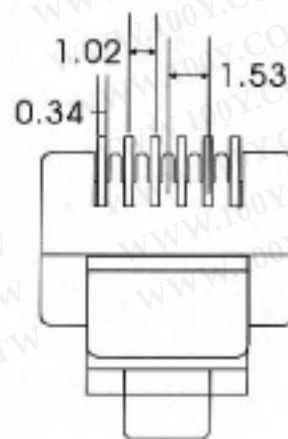

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

UNIT

MM

SCALE

2 : 1

PART NAME

PLUG COVER

APPD.

CKD.

TOLERANCE

± 0.5

PART NO.

REV.

A

製表日:2000/05/14

DWG.  
TINA

APPROVED

1

2

3

4

5

6

7

8