

規 格 書

SPECIFICATION FOR APPROVAL

Customer :

PRODUCT : AC/DC ADAPTOR

MODEL : JLD-09012U 9V1.2A

APPROVED BY
Approved No.
DATE : 2011.12. 06

勝 特 力 材 料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

INPUT REQUIREMENT

ITEM	SPECIFICATION	MIN	TYP	MAX
AC INPUT VOLTAGE	SINGLE PHASE	100vAC		240vAC
AC INPUT VOLTAGE RANGE	SINGLE PHASE	90vAC		260vAC
AC INPUT FREQUENCY	SINGLE PHASE	47Hz		63Hz
AC INPUT CURRENT	TYPICAL INPUT VOLTAGE & OUTPUT AT FULL LOAD	300 mA		450mA
AC INRUSH CURRENT	TYPICAL INPUT VOLTAGE & OUTPUT AT FULL LOAD 25°C		20A	
EFFICIENCY	TYPICAL INPUT VOLTAGE & OUTPUT AT FULL LOAD		>70%	
LEAKAGE CURRENT	TYPICAL INPUT VOLTAGE & OUTPUT AT FULL LOAD			0.25mA

OUTPUT SPECIFICATION


ITEM	SPECIFICATION	MIN	TYP	MAX
NOMINAL DC OUTPUT VOLTAGE			9vDC	
DC OUTPUT VOLTAGE RANG	TYPICAL OUTPUT VOLTAGE	8.4vDC		9.6vDC
MINI LOAD CURRENT		0.0A		
MAX LOAD CURRENT				1200mA
OVER CURRENT PROTECTION	AUTO RECOVERY			
SHORT CIRCUIT PROTECTION	AUTO RECOVERY			

RELIABILITY & ENVIRONMENT

ITEM	TEST CONDITION	ACCEPTANCE CRITERIA
LIFE	TYPICAL INPUT & FULL LOAD AT 35°C TYPICAL INPUT & FULL LOAD AT 25°C	1 YEAR ABOVE 2 YEARS ABOVE
OPERATING TEMPERATURE	0°C ~ +40°C AMBIENT	
STORAGE TEMPERATURE	-10°C ~ +60°C	
HUMIDITY	20% ~ 90% RH	

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

OUTLOOKING

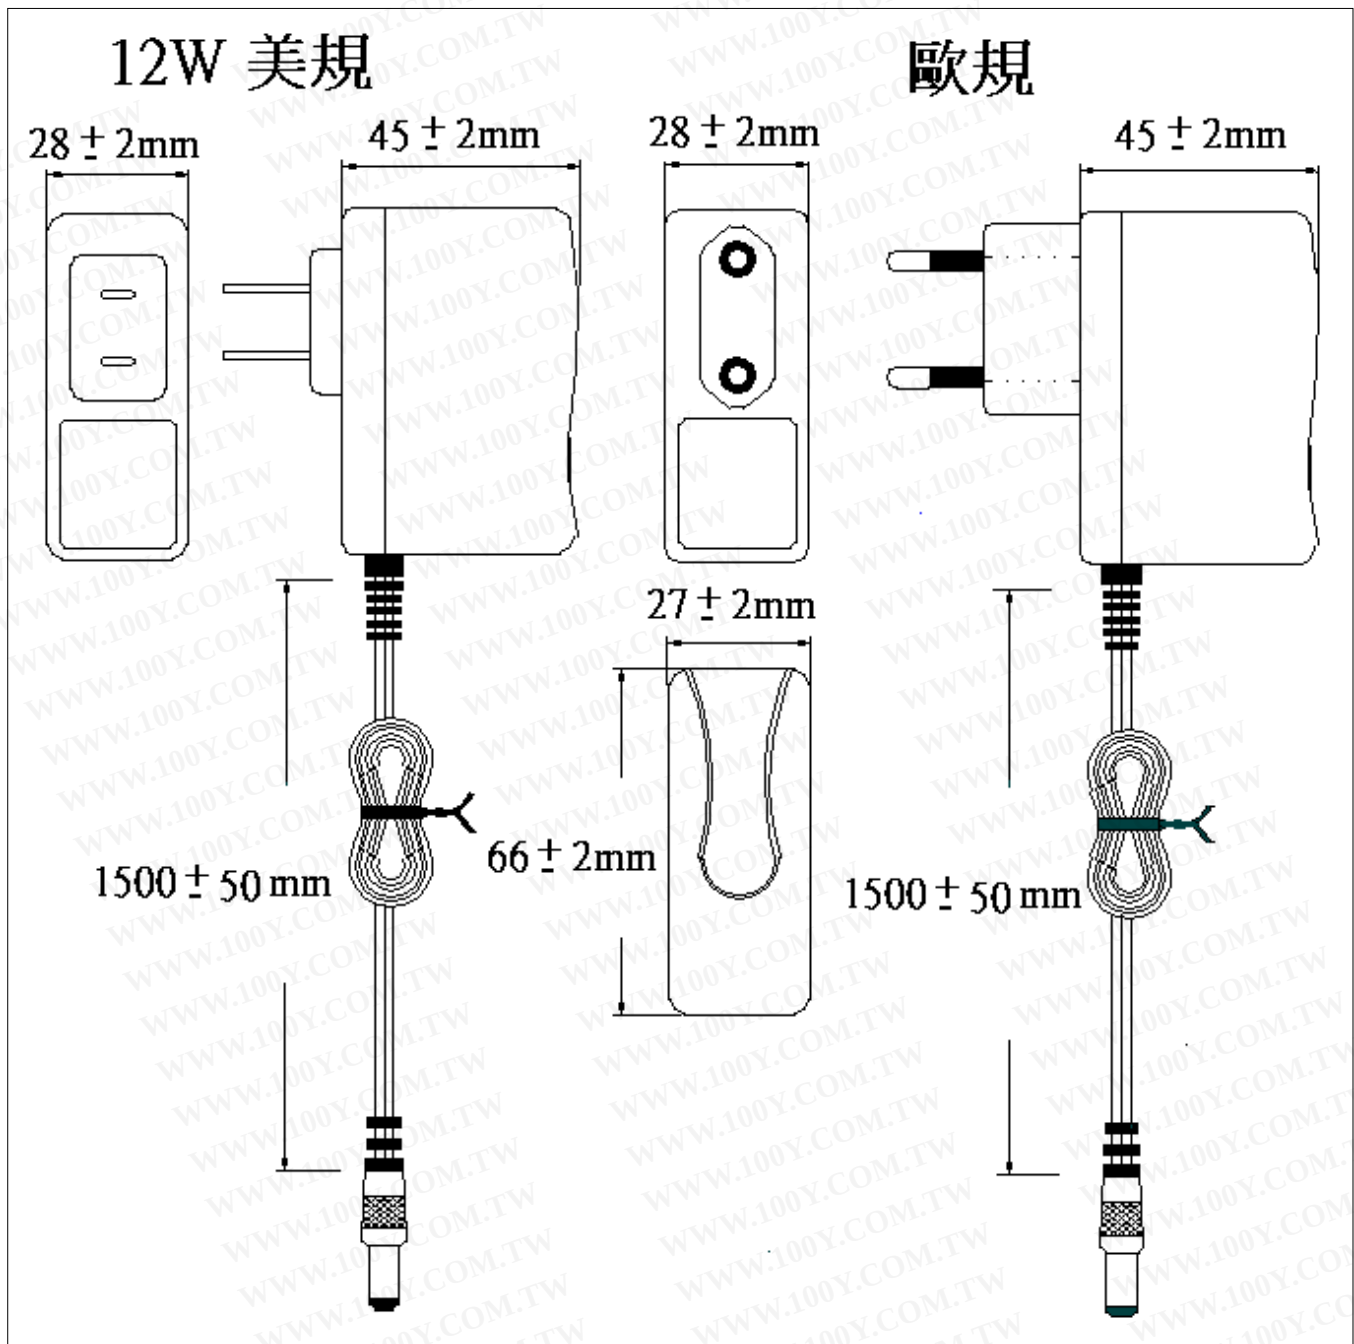

BODY SIZE : 66(L)×27(W)×45(H)mm (not include Terminals & Wires)

WEIGHT : About 100g

I/P TERMINAL : Wall Mount

O/P TERMINAL : 5.5 × 2.1 X 9.5mm ⊖ — ⊕ — ⊕

Length of output cable : 1500 mm (± 50mm)

SAFETY

UL FCC TUV CE

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)