

Features

Unregulated Converters

- Low Cost 1W Converter
- Power Sharing on Dual Output Version
- Industry Standard Pinout
- 1kVDC or 2kVDC Isolation Options
- Optional Continuous Short Circuit Protected
- UL94V-0 Package Material
- Efficiency to 85 %

Description

The RB series DC/DC converter has been designed for isolating or converting DC power rails in general purpose applications. Although low cost, it does not compromise on features and offers 1KVDC or 2kVDC isolation, a -40°C to +85°C operating temperature range and optional continuous short circuit protection.

Selection Guide

Part Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)	Max Capacitive Load ⁽¹⁾
RB-xx3.3S	3.3, 5, 12, 15, 24	3.3	303	75	2200µF
RB-xx05S	3.3, 5, 12, 15, 24	5	200	70-78	1000µF
RB-xx09S	3.3, 5, 12, 15, 24	9	111	70-78	1000µF
RB-xx12S	3.3, 5, 12, 15, 24	12	84	78-80	470µF
RB-xx15S	3.3, 5, 12, 15, 24	15	66	80-84	470µF
RB-xx24S	3.3, 5, 12, 15, 24	24	42	74-85	220µF
RB-xx3.3D	3.3, 5, 12, 15, 24	±3.3	±152	70	±1000µF
RB-xx05D	3.3, 5, 12, 15, 24	±5	±100	70-78	±470µF
RB-xx09D	3.3, 5, 12, 15, 24	±9	±56	76-79	±470µF
RB-xx12D	3.3, 5, 12, 15, 24	±12	±42	78-82	±220µF
RB-xx15D	3.3, 5, 12, 15, 24	±15	±33	80-84	±220µF
RB-xx24D	3.3, 5, 12, 15, 24	±24	±21	80-84	±100µF

xx = Input Voltage. Other input and output voltage combinations available on request.

* add Suffix "P" for Continuous Short Circuit Protection, e.g. RB-0505S/P, RB-0505S/HP

Specifications (measured at T_A = 25°C, nominal input voltage, full load and after warm-up)

Input Voltage Range	±10%	
Output Voltage Accuracy	±5%	
Line Voltage Regulation	1.2%/1% of Vin typ.	
Load Voltage Regulation (10% to 100% full load)	3.3V output type	20% max.
	5V output type	15% max.
	9V, 12V, 15V, 24V output types	10% max.
Output Ripple and Noise (20MHz limited)	Single output types	100mVp-p max.
	Dual output types	±75mVp-p max.
Operating Frequency	50kHz min. / 100kHz typ. / 105kHz max.	
Efficiency at Full Load	70% min. / 80% typ.	
Minimum Load = 0%	Specifications valid for 10% minimum load only.	
Isolation Voltage	(tested for 1 second)	1000VDC
	(rated for 1 minute**)	500VAC / 60Hz
Isolation Voltage	H-Suffix (tested for 1 second)	2000VDC
	H-Suffix (rated for 1 minute**)	1000VAC / 60Hz
Isolation Capacitance	20pF min. / 75pF max.	
Isolation Resistance	10 GΩ min.	
Short Circuit Protection	1 Second	
P-Suffix	Continuous	
Operating Temperature Range (free air convection)	-40°C to +85°C (see Graph)	
Storage Temperature Range	-55°C to +125°C	
Relative Humidity	95% RH	

continued to next page

ECONOLINE

DC/DC-Converter

with 3 year Warranty

RECOM

1 Watt

SIP7

Single & Dual Output




E358085

EN-60950-1 Certified
UL-60950-1 Certified
EN-60601-1 Certified*
 (* /H suffix)

RB

Derating-Graph (Ambient Temperature)

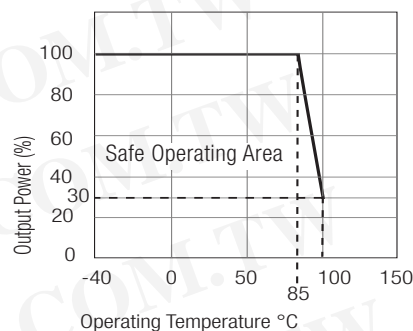

**Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.

Refer to Application Notes

www.recom-power.com



ECONOLINE DC/DC-Converter

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)



Package Weight			2.2g
Packing Quantity			25 pcs per Tube
MTBF (+25°C)	} Detailed Information see using MIL-HDBK 217F	} Application Notes chapter "MTBF" using MIL-HDBK 217F	1012 x 10 ³ hours
(+85°C)			151 x 10 ³ hours
Certifications			
CB Test Report	Report: SPCLVD1109103		IEC 60950-1:2005 2nd Ed.
UL General Safety	Report: E358085		UL 60950-1 2nd Ed.
EN General Safety	Report: SPCLVD1109103		EN60950-1:2006 + A12:2011
EN Medical Safety	Report: MDD1112018 + RM1112018		IEC/EN 60601-1 3rd Edition
	EditionMedical Report + ISO14971 Risk Assessment		

Typical Characteristics - Single Output



RB-xx05S

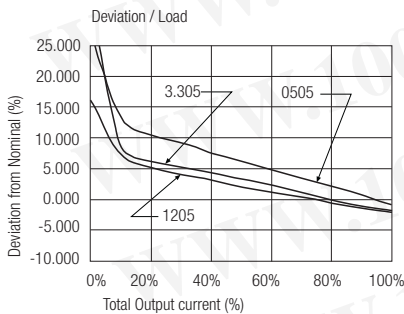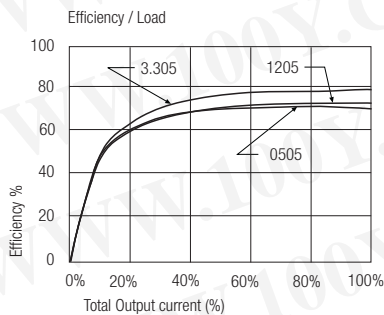



RB-xx09S

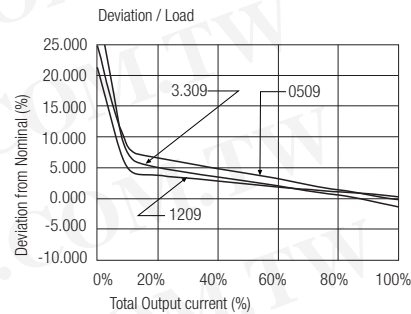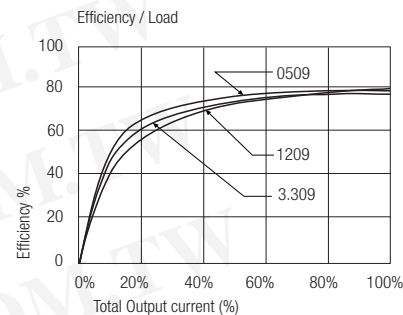

RB-xx12S

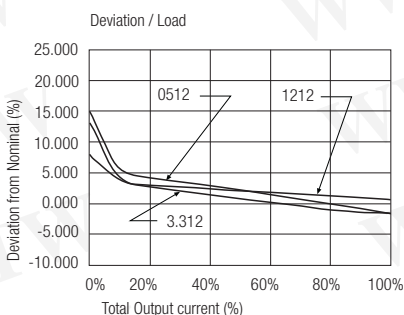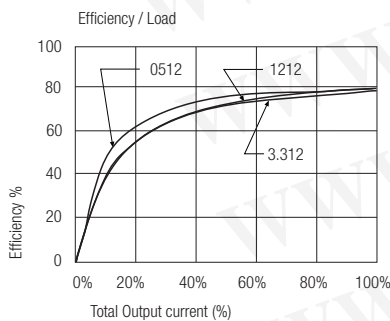


RB-xx15S

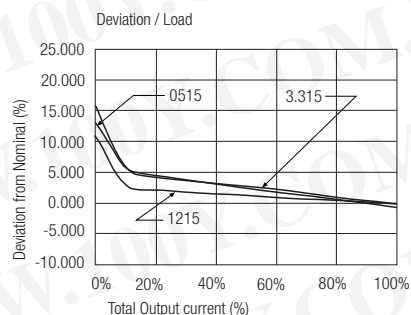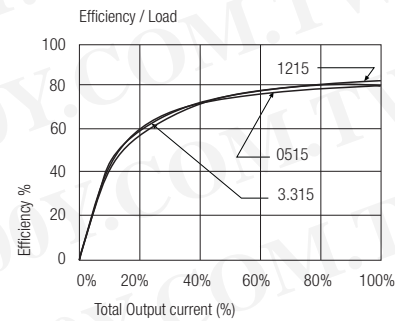


Typical Characteristics - Dual Outputs


RB-xx05D

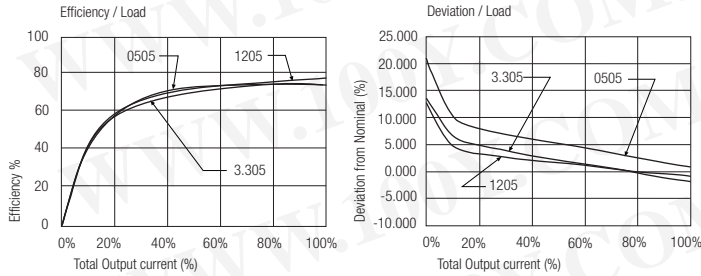


RB-xx12D

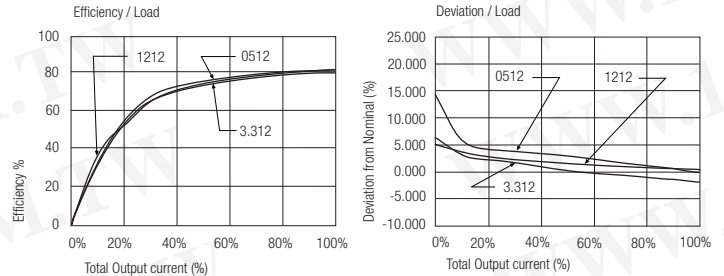

RB-xx09D

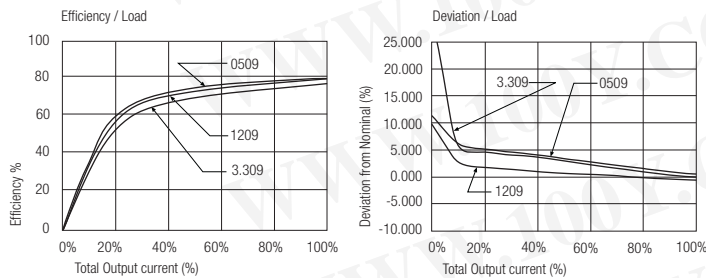


RB-xx15D

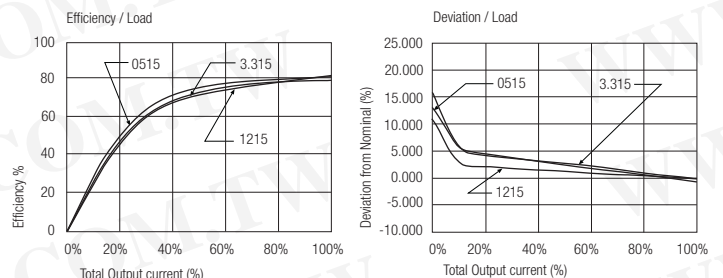


Notes
Note 1 Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

Package Style and Pinning (mm)

SIP7 Package

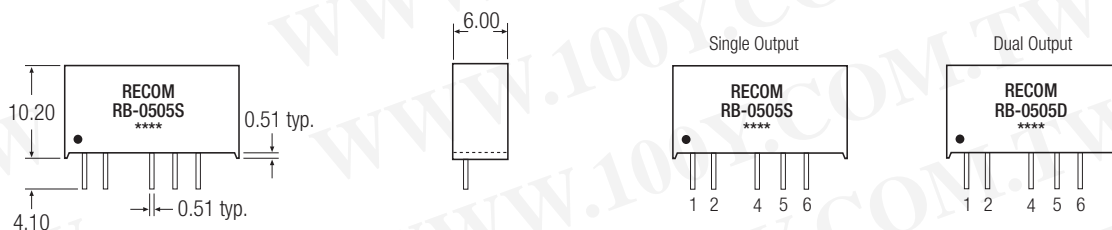

Recommended Footprint Details

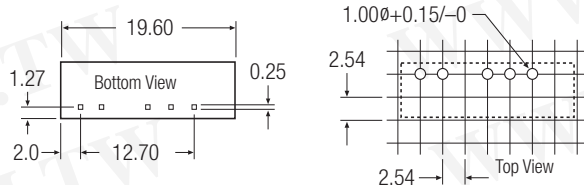

Pin Connections

Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
4	NC	-Vout
5	-Vout	Com
6	+Vout	+Vout

NC = No Connection
XX.X ± 0.5 mm
XX.XX ± 0.25 mm

The product information and specifications are subject to change without prior notice. All products are designed for non-safety critical commercial and industrial applications. The Buyer agrees to implement safeguards that anticipate the consequences of any failures that might cause harm, loss of life and/or damage property.