


Features

1. Molded epoxy body.
2. Zero crossing circuit.
3. High input/output insulation.
4. Small size and light weight.
5. Fast reactive speed.
6. Good heat sinking.
7. Normally open.


Applications

1. Household Appliances.
2. Temperature Control System.
3. Industrial Automatic Control.
4. Lighting System.
5. Office Appliances.
6. Factory Appliances.

Outside Dimension : Unit (mm)

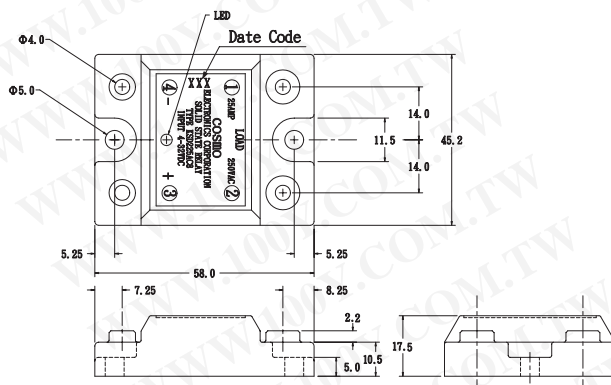

Schematic : Top View

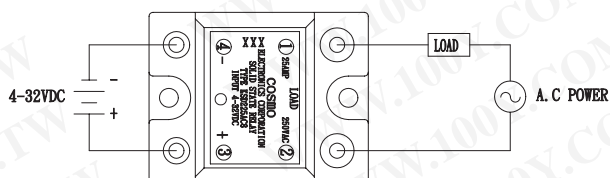

Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Rating	Unit
Input	Input Signal Voltage	V _{IN}	4-32
	Drop-out Voltage	V _{do}	1
Output	RMS on-state current	I _T	25
	Peak one cycle surge current (8.3 ms)	I _{surge}	250
	Repetitive peak-off state Voltage	V _{DRM}	600
	Operating frequency	f	47-70
	Critical rate of rise of on-state current	di/dt	50
	Load supply voltage	V _{out}	250
	Isolation Voltage input to output	V _{iso}	4000
Operating Temperature	T _{opr}	-30~100	°C
Storage Temperature	T _{stg}	-30~125	°C


Electrical Characteristics

(Ta=25°C)

Parameter	Symbol	Conditions	MIN	TYP	MAX	Unit	
Input	Pick-up Voltage	V _{pu}			4	VDC	
	Input current	I _{in}	V _{in} =4-32V	5		12	mA
Output	On-state Voltage	V _T	I _T =1Arms			1.5	V _{rms}
	Operating Current	I _{op}	V _{out} =240V _{rms}	50			mArms
	Leakage Current	I _{leak}	V _{out} =240V _{rms}		3.5	7	mArms
	Critical rate of rise of off-state Voltage	dv/dt	See Note 1	50	200		V/μS
	Zero-cross Voltage				Yes		
	Load Voltage Rating	V _{out}	I _T =50mArms MIN	50		280	VAC
Minimum trigger current	I _{FT}	V _{DRM} =600V			10	mA	
Isolation resistance input to output	R _{iso}	DC500V	10 ¹⁰			Ω	
Turn-on time	T _{on}	60Hz AC			8.3	mS	
Turn-off time	T _{off}	60Hz AC			8.3	mS	
Thermal resistance (between junction and case)	R _{th (j-c)}	I		1.3		°C/W	

Note1 : Output (dv/dt) protection is provided in all models, and they are designed to switch resistive or inductive loads to 0.2 power factor. The dv/dt rating is based on source impedance of 50 ohms.

Data Curve

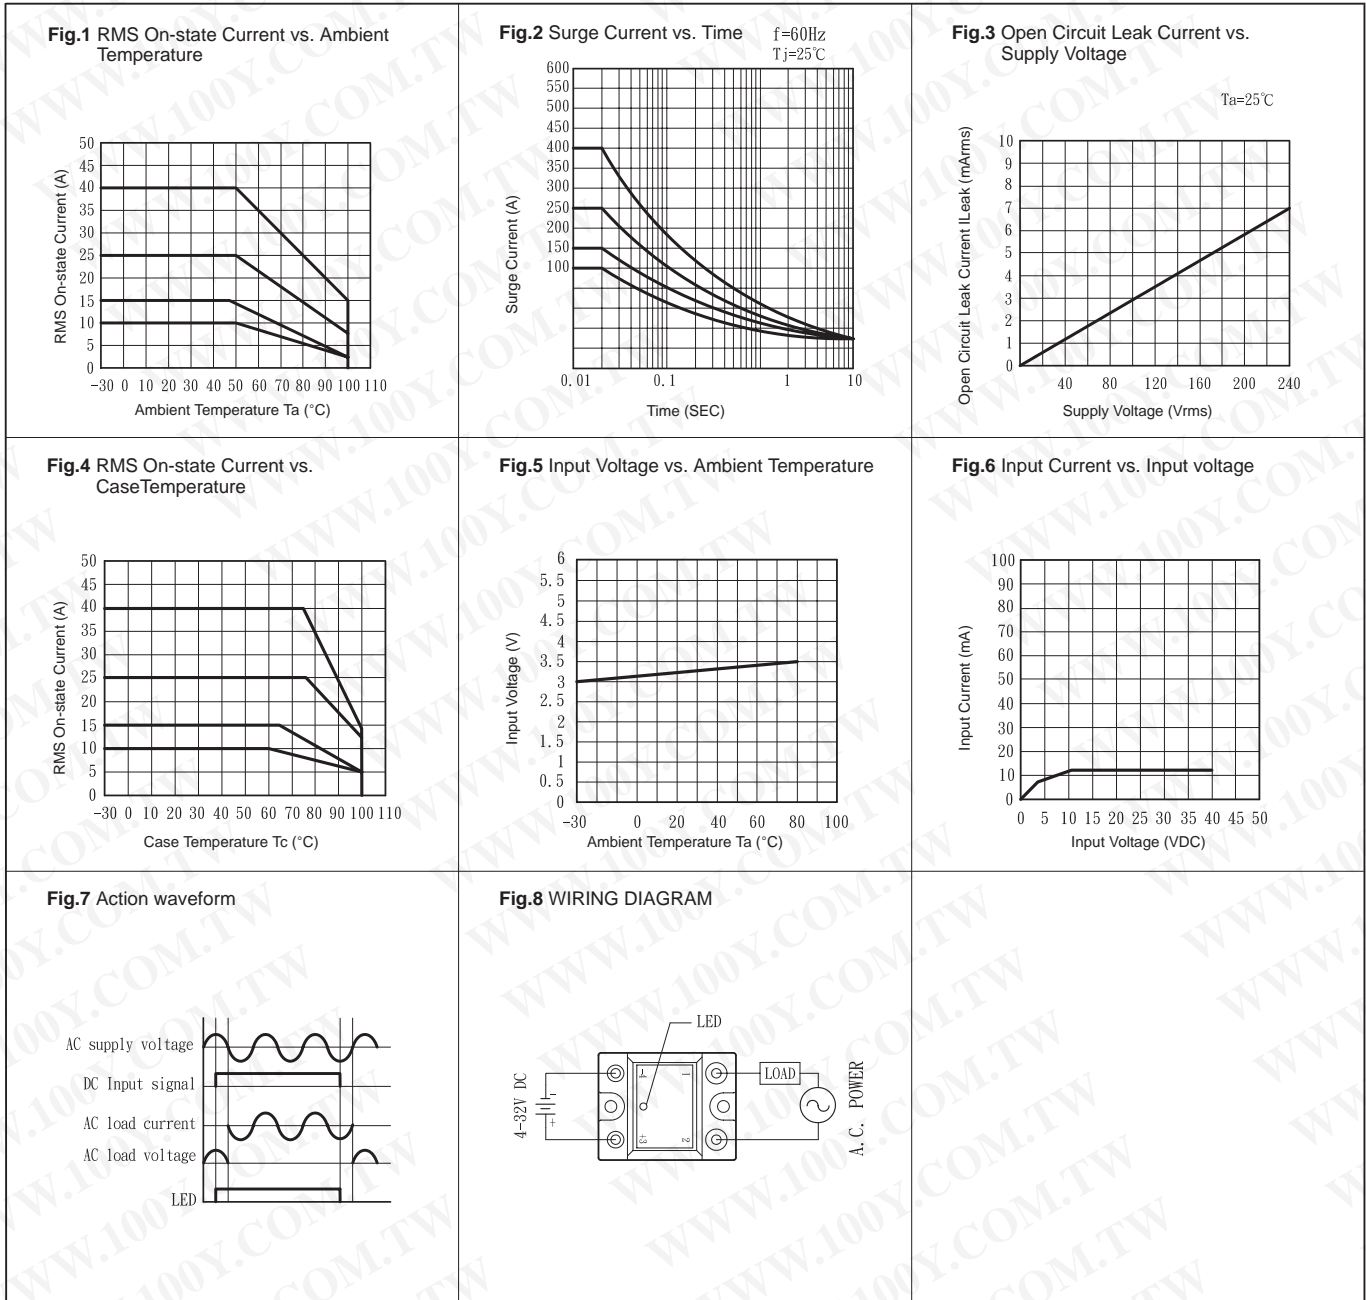

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)