






HCNE1-0530

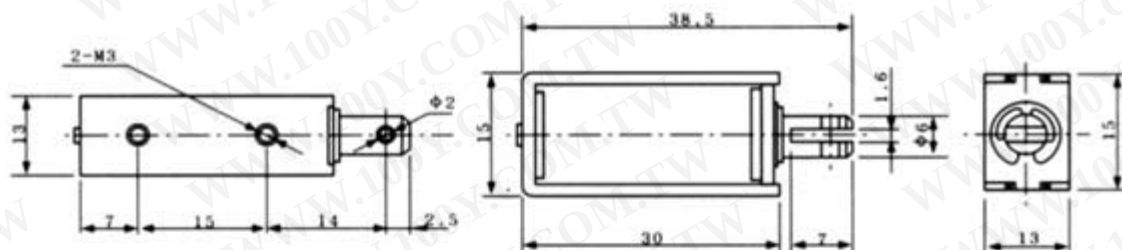


温度特性

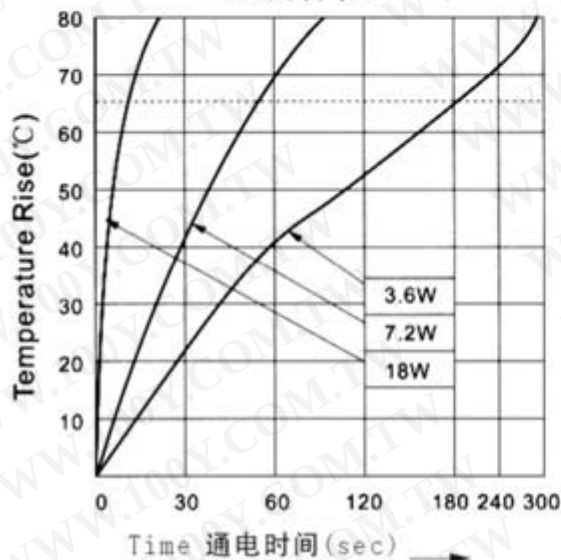

吸力特性

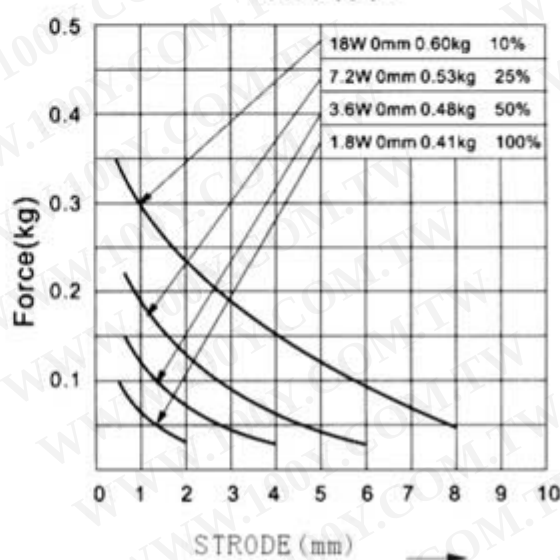

一、型号含义:



二、安装尺寸:

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

b 通電率


$$\text{通电率} = \frac{\text{通电时间}}{\text{通电时间} + \text{遮断时间}} \times 100$$




通电率	最大通电时间
75%	20分
50%	7分
25%	2分
10%	1分

2、电磁铁作动形式

※Pull方式



※Push方式



分割式



贯通式



Tap式




Rivet式




段式




Cut式

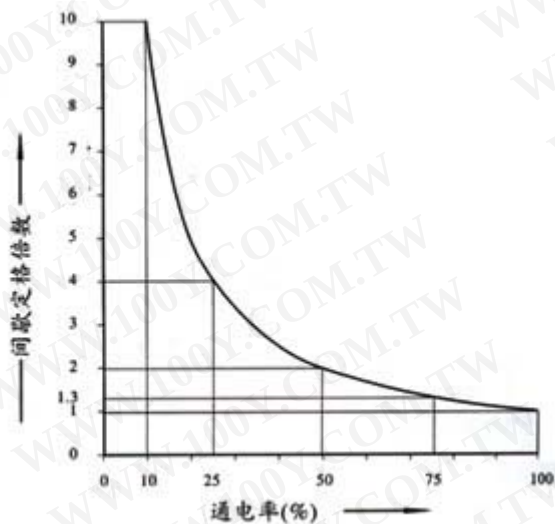



六、消音

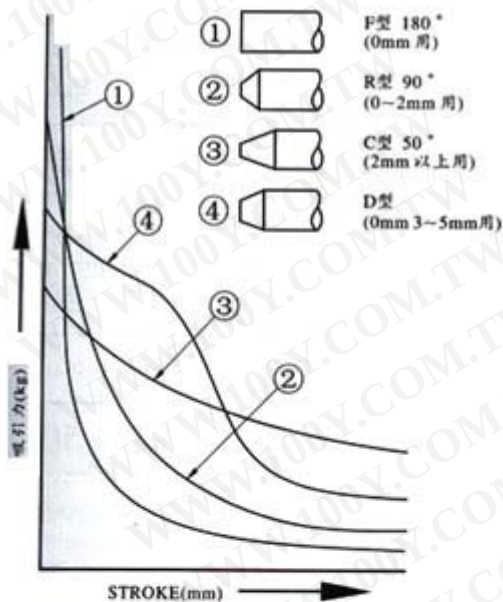

●外部型

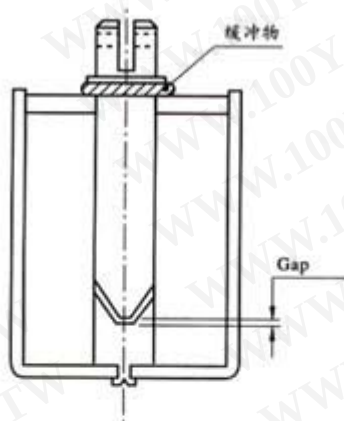

●内装型

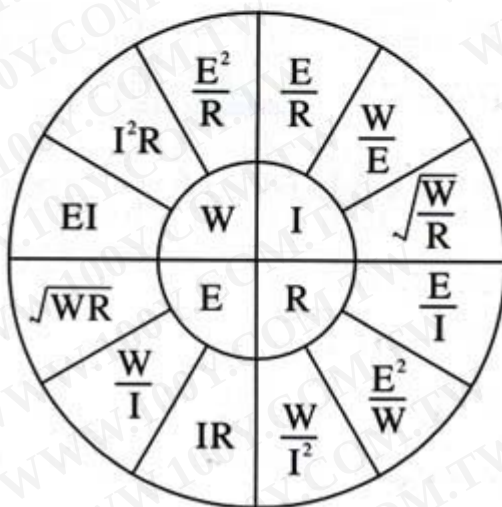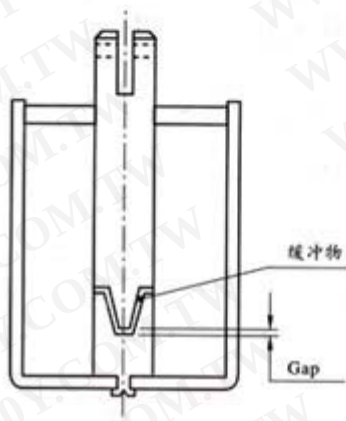

I=电流(A)

R=电阻(Ω)

点击次数: 2343

发布时间: 2009-4-24 11:25:03

打印页面

关闭窗口