






HCNE1-0630

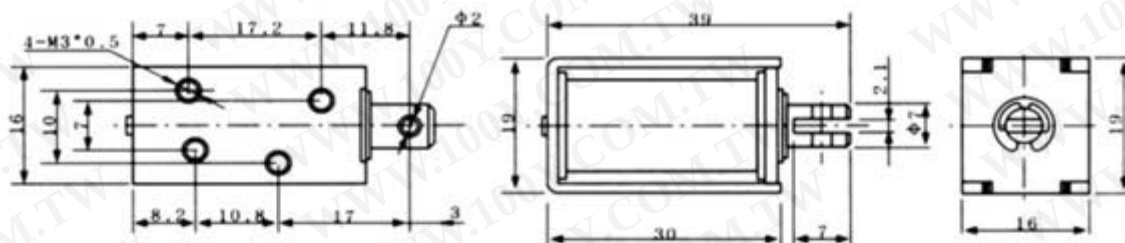


温度特性

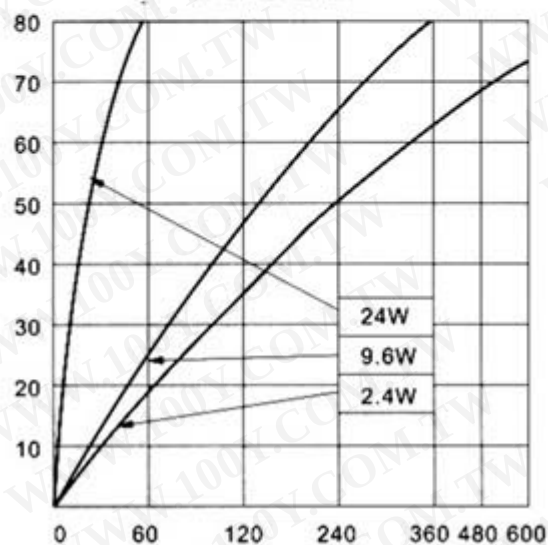

吸力特性

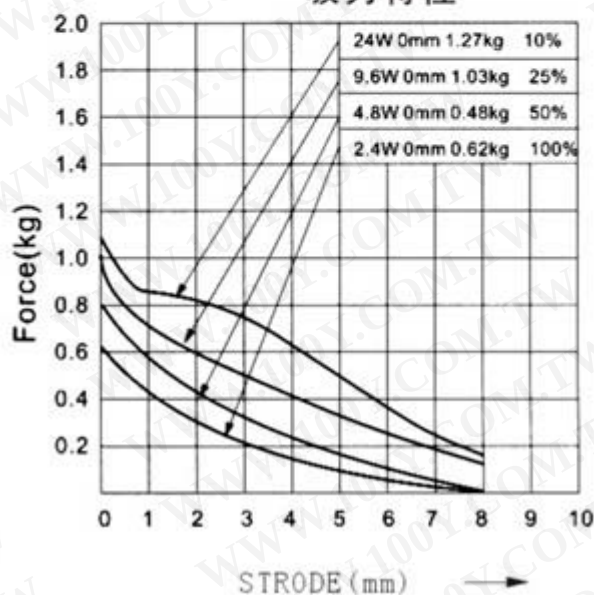

一、型号含义:



二、安装尺寸:

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)





$$\text{通电率} = \frac{\text{通电时间}}{\text{通电时间} + \text{遮断时间}} \times 100$$







通电率	最大通电时间
75%	20分
50%	7分
25%	2分
10%	1分

2、电磁铁作动形式

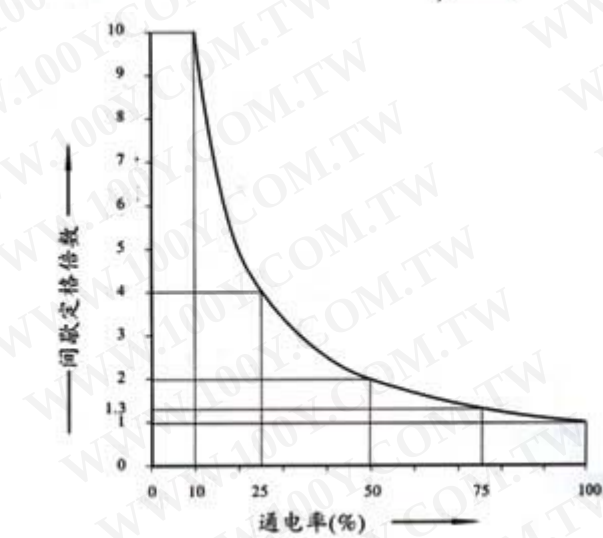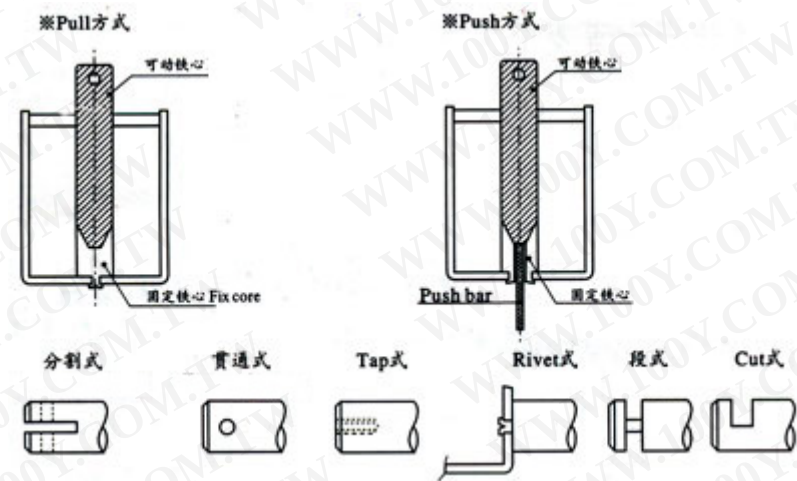

六、消音

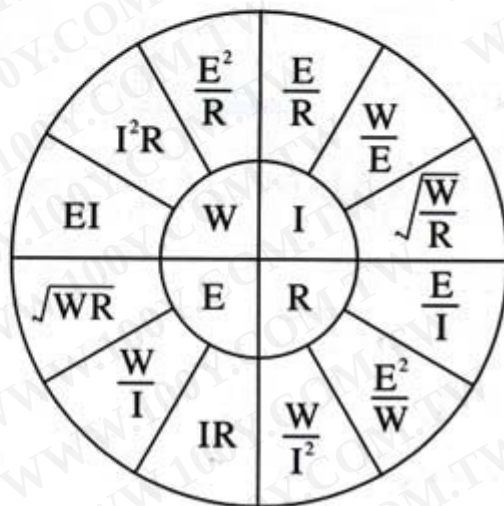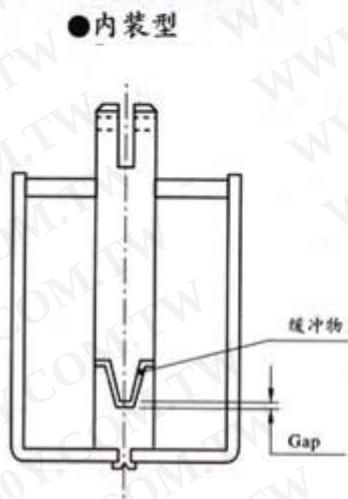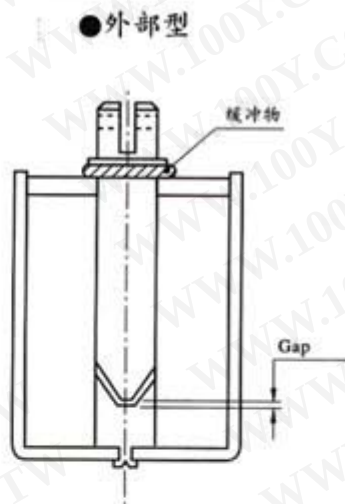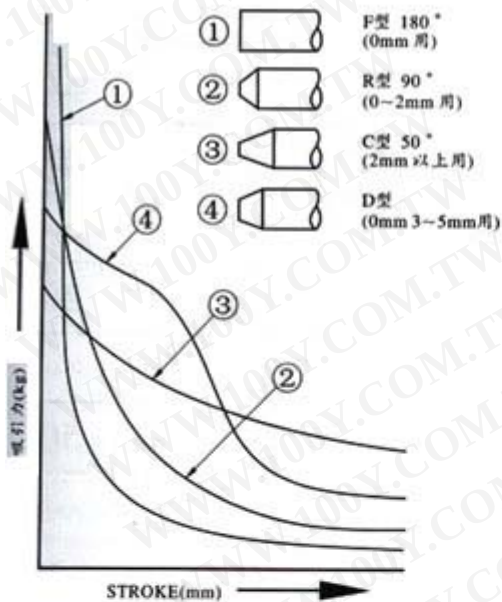

I=电流(A)

R=电阻(Ω)