

AC Solid State Relay



S3

SERIES



Features


- 15A/25A/45A type have common dimensions
- LED installed
- Dielectric strength between input and output at 3,000V/1 min.
- Built-in varistor (surge absorb element)
- UL、C-UL、VDE standard approved
- Terminal safety cover installed
- Optional heat-sink available (P93)

Type Information


S	3	C	-	2	1	5	W	D	V
Zero-cross-circuit	Standard load voltage	Max. load current			Input voltage range				
C : Built-in	2 : 100V, 200V	15 : 15A 25 : 25A 45 : 45A			WDV : DC3.5 ~ 30V				

Characteristics


S3C-215WDV

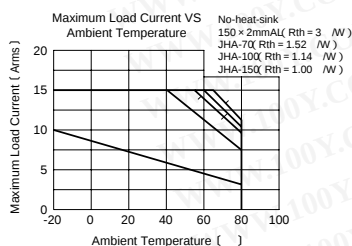

S3C-225WDV

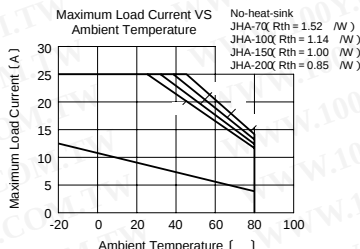


S3C-245WDV

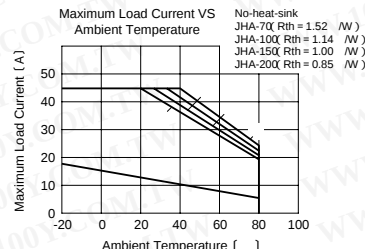

Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.
 Please contact JEL SYSTEM for further information.

Dimensions (mm)

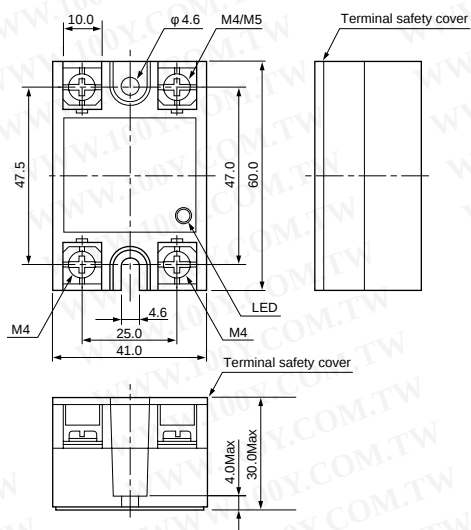

Torque range


M4 terminal 1.5 N · m(MAX)

M5 terminal 2.0 N · m(MAX)

Outer case 1.5 N · m(MAX)

Terminal number	Terminal size	
	S3C-215 S3C-225	S3C-245
(Output)	M4	M5
(Output)		M5
(Input +)		M4
(Input -)		M4

Equivalent Circuit

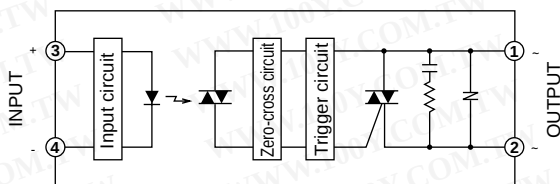

Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.
Please contact JEL SYSTEM for further information.

■ Ratings

(Ta = 25 °C)

	Item	Symbols	S3C-215WDV	S3C-225WDV	S3C-245WDV	Units
Output	Rated Load Voltage	V _O	120、240			V _{ACrms}
	Maximum Load Current	I _{OMAX}	15	25	45	A _{ACrms}
	Peak Repetitive Off State Voltage	V _{DRM}	387			V
	Peak 1 Cycle Surge Current	I _{SURGE}	150	225	440	A
	Frequency	f	50、60			Hz
Input	Maximum Input Voltage	V _{IMAX}	30			V _{DC}
	Max Input Current	I _{IMAX}	10			mA _{DC}
General	Dielectric Strength	V _{ISO}	3,000 / 1min. (Between input-output-case) (Rh40 ~ 60 %)			V _{ACrms}
	Isolation Resistance	R _{ISO}	10 ⁸ and above DC500V (Between input-output-case) (Rh40 ~ 60 %)			Ω
	Operating Temperature Range	T _{OPR}	- 20 ~ + 80			
	Storage Temperature Range	T _{STG}	- 30 ~ + 100			



■ Electrical Characteristics

(Ta = 25 °C)



	Item	Symbols	S3C-215WDV	S3C-225WDV	S3C-245WDV	Units
Output	Load Voltage Range	V _O	35 ~ 264			V _{ACrms}
	Off State Leakage Current	I _{LEK}	12 and below (V _O = 200V)			mA _{ACrms}
	On State Voltage Drop	V _{SAT}	1.5 and below			V _{ACrms}
	Minimum Load Current	I _{OMIN}	100			mA
Input	Input Voltage Range	V _I	3 ~ 30 (T _{OPR} = 0 ~ + 80)			V _{DC}
			3.5 ~ 30 (T _{OPR} = - 20 ~ 0)			
	Operate Voltage	V _P	3 and below (T _{OPR} = 0 ~ + 80)			V _{DC}
			3.5 and below (T _{OPR} = - 20 ~ 0)			
	Release Voltage	V _D	1 and above			V _{DC}
General	Operate Time	T _{ON}	1/2 Cycle + 1ms and below			
	Release Time	T _{OFF}	1/2 Cycle + 1ms and below			
	Capacitance	C _{IO}	15 and below			PF
	Zero Cross Turn On		Built In			
	Approved Standards		UL、C-UL、VDE			

Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.
Please contact JEL SYSTEM for further information.


S3C-215WDV

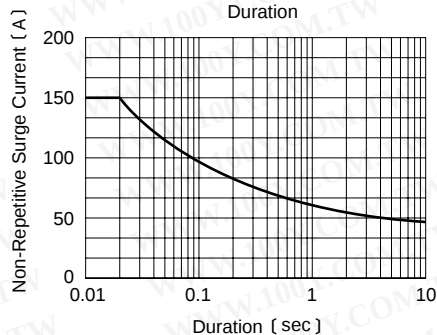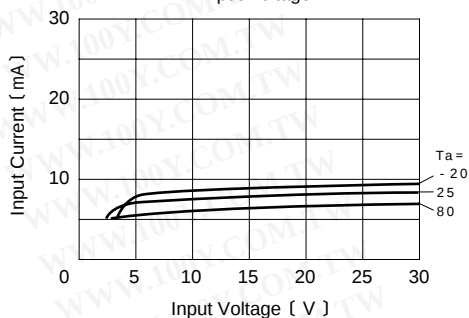Peak Surge Current VS.
DurationInput Current VS.
Input Voltage

S3C-225WDV

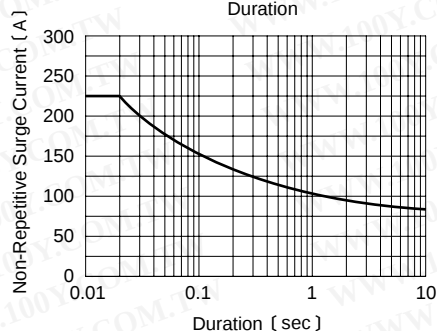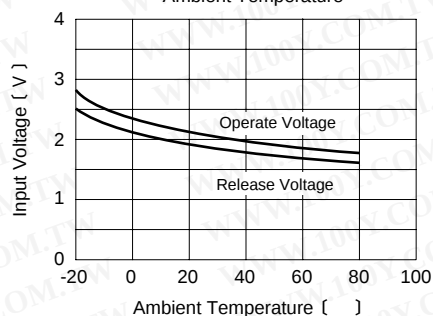Peak Surge Current VS.
DurationInput Characteristics VS
Ambient Temperature

S3C-245WDV

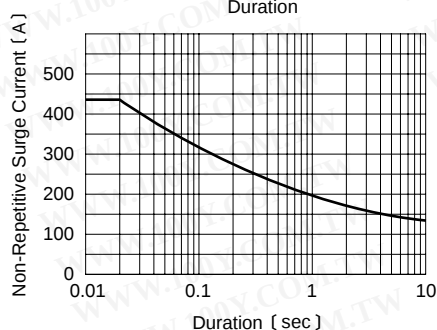Peak Surge Current VS.
Duration

Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.
Please contact JEL SYSTEM for further information.


Option

Heat-sink


Model	JHC-41-1
SUITABLE SSR	S3C Series

勝特力材料 886-3-5753170
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

● Dimensions

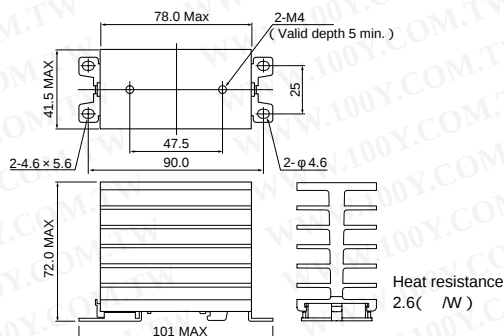


● Dimensions



Model	JHA-□□□
SUITABLE SSR	S3C Series

● Dimensions

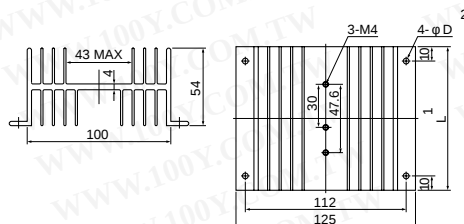

Model	Heat Resistance (°C/W)	1 L (mm) Dimensions	2 D (mm) Dimensions
JHA-70	1.52	70	4
JHA-100	1.14	100	4
JHA-150	1.00	150	4.5
JHA-200	0.85	200	4

Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using.
 Please contact JEL SYSTEM for further information.