


固態繼電器 SOLID STATE RELAY

KB40C02A
KB40C03A
KB40C04A
KB40C05A
KB40C06A

KB40C SERIES



型號索引說明 Model No. Descriptions:

KB 40 C 05 A

These two letters indicate SSR's series:
KA,KB,KD,KO,KS,KT : DC to AC TYPE

This letters indicate:
"A" = AC output,
"D" = DC output,

負載電壓
THE OUTPUT VOLTAGE:
20 = 240VDC / 280VAC
40 = 480VAC

C = Zero Cross
R = Random Type.

負載電流
THE OUTPUT CURRENT :
02 = 2A , 04 = 4A

產品摘錄 PRODUCT SELECTON

輸出規格 OUTPUT SPECIFICATIONS

品名	Description	KB40C02A	KB40C03A	KB40C04A	KB40C05A	KB40C06A
負載電壓範圍	Operating Voltage [VAC]	24-480VAC	24-480VAC	24-480VAC	24-480VAC	24-480VAC
最大負載電流	Maximum Load Current [A]	2A	3A	4A	5A	6A
破壞電壓	Maximum Transient Overvoltage [Vpk]	1200	1200	1200	1200	1200
洩露電流	Maximum Off-State Leakage Current @Rated Voltage [mA]	Less 3mA	Less 3mA	Less 3mA	Less 3mA	Less 3mA
最大瞬間承受電流	Maximum Surge Current [Adc] (10ms)	20A	30A	40A	50A	60A
動作壓降	Maximum On-State Voltage Drop @ Rated Current [VACrms]	1.5	1.5	1.5	1.5	1.5
瞬間電壓變化率	Maximum Off-State dV/dt [V/uSEC]	200	200	200	200	200

輸入規格 INPUT SPECIFICATIONS

品名	Description	KB40C02A	KB40C03A	KB40C04A	KB40C05A	KB40C06A
控制電壓範圍	Control Voltage Range	3-32VDC	3-32VDC	3-32VDC	3-32VDC	3-32VDC
最小導通電壓	Minimum Turn-on Voltage	3.0	3.0	3.0	3.0	3.0
最大關斷電壓	Maximum Turn-off Voltage	1.0	1.0	1.0	1.0	1.0
輸入電流	Typical Input Current	15mA	15mA	15mA	15mA	15mA
最大動作時間	Maximum Turn-on Time [mSec]	Less 2m Sec	Less 2m Sec	Less 2m Sec	Less 2m Sec	Less 2m Sec
最大關斷時間	Maximum Turn-off Time [mSec]	Less 1/2AC cycle	Less 1/2AC cycle	Less 1/2AC cycle	Less 1/2AC cycle	Less 1/2AC cycle


一般規格 GENERAL SPECIFICATIONS

品名	Description	KB40C02A	KB40C03A	KB40C04A	KB40C05A	KB40C06A
輸入/輸出至外殼絕緣電壓	Dielectric Strength , Input-Output Base (50/60Hz)	-	-	-	-	-
輸入/輸出絕緣電壓	Dielectric Strength , Input-Output (50/60Hz)	2500	2500	2500	2500	2500
絕緣電阻	Minimum Insulation Resistance	10 ⁹ ohm	10 ⁹ ohm	10 ⁹ ohm	10 ⁹ ohm	10 ⁹ ohm
輸入-輸出容抗	Maximum Capacitance , Input-Output	Less 15pf	Less 15pf	Less 15pf	Less 15pf	Less 15pf
工作溫度範圍	Ambient Operating Temperature Range	-20°C~+80°C	-20°C~+80°C	-20°C~+80°C	-20°C~+80°C	-20°C~+80°C
儲存溫度範圍	Ambient Storage Temperature Range	-40°C~+100°C	-40°C~+100°C	-40°C~+100°C	-40°C~+100°C	-40°C~+100°C
觸發方式	Switch ing Type	Zero Cross	Zero Cross	Zero Cross	Zero Cross	Zero Cross
重量	Weight (g)	12g	12g	12g	12g	12g


GENERAL NOTES

- (1) All parameters at 25°C unless otherwise specified
- (2) Dielectric strength and insulation resistance are measured between input and output
- (3) Heat sinking require ,for derating curves see next page.

等效電路圖 **EQUIVALENT CIRCUIT**

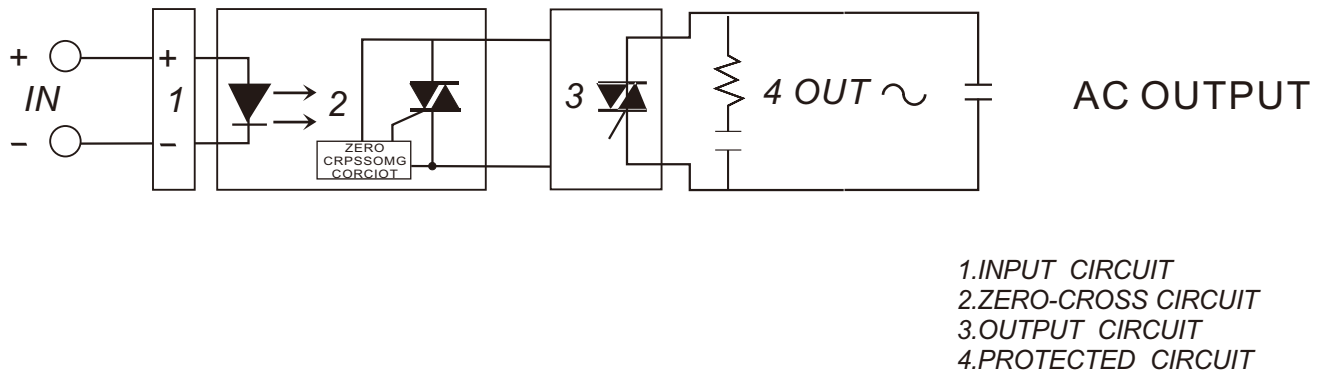

外觀尺寸圖 **MECHANICAL DIMENSIONS (Unit:mm)**

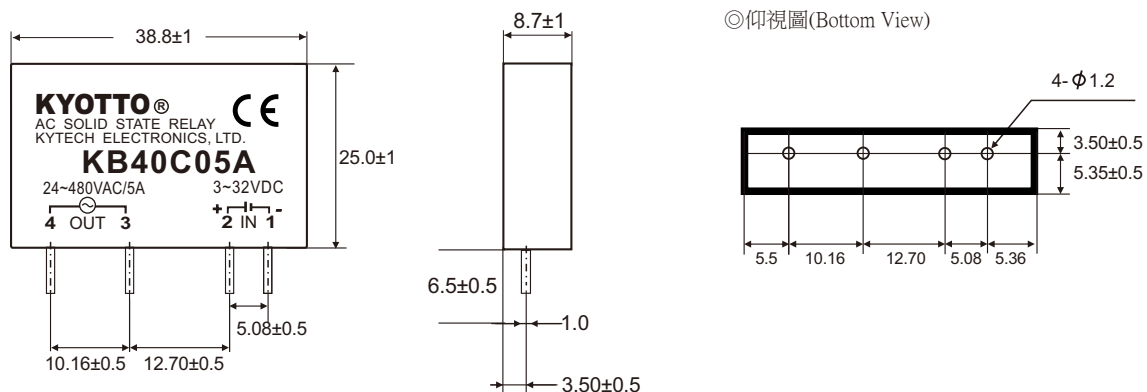

特性曲線圖 **CHARACTERISTIC CURVES**

