

MOS FET Relays

G3VM-353B/B1/E/E1

Six-pin Analog-switching MOS FET Relays with SPST-NC Contact. General-purpose Models Added.

- Switches minute analog signals.
- Switching AC and DC.
- General-purpose models (models with high ON resistance) added to the series.

RoHS compliant

⚠ Refer to "Common Precautions".

■ Application Examples

- Electronic automatic exchange systems
- Security systems
- Datacom (modem) systems
- FA systems
- Measurement devices



Note: The actual product is marked differently from the image shown here.


■ List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per stick	Number per tape
SPST-NC	PCB terminals	350 VAC	G3VM-353B	50	---
	Surface-mounting terminals		G3VM-353B1		
			G3VM-353E		
			G3VM-353E1		
			G3VM-353E(TR)	---	1,500
			G3VM-353E1(TR)		


■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

G3VM-353B/B1

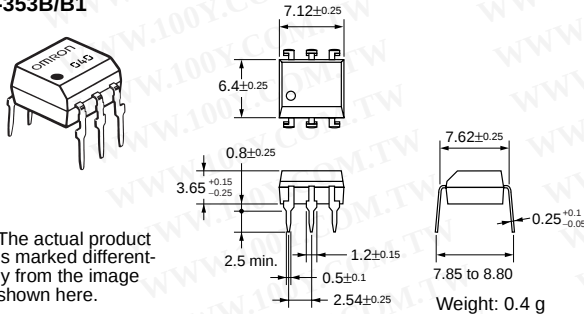


G3VM-353E/E1

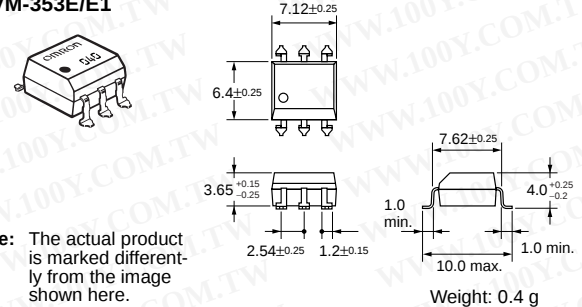


■ Terminal Arrangement/Internal Connections (Top View)

G3VM-353B/B1




G3VM-353E/E1




■ PCB Dimensions (Bottom View)

G3VM-353B/B1



■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-353E/E1



Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Rating	Unit	Measurement Conditions
Input	LED forward current	I_F	50	mA
	Repetitive peak LED forward current	I_{FP}	1	A
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.5	mA/°C
	LED reverse voltage	V_R	5	V
	Connection temperature	T_j	125	°C
Output	Output dielectric strength	V_{OFF}	350	V
	Continuous load current	Connection A	I_O	150 (100)
		Connection B		150 (100)
		Connection C		300 (200)
	ON current reduction rate	Connection A	$\Delta I_{ON}/^\circ\text{C}$	-1.5 (-1)
		Connection B		-1.5 (-1)
		Connection C		-3.0 (-2)
	Connection temperature	T_j	125	°C
Dielectric strength between input and output (See note 1.)		V_{I-O}	2,500	Vrms
Operating temperature		T_a	-40 to +85	°C
Storage temperature		T_{stg}	-55 to +125	°C
Soldering temperature (10 s)		---	260	°C
			10	s

Values in parentheses are for the G3VM-353B1/E1.

Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V_F	1.0	1.15	1.3	V
	Reverse current	I_R	---	---	10	μA
	Capacity between terminals	C_T	---	30	---	pF
	Trigger LED forward current	I_{FT}	---	1	3	mA
Output	Maximum resistance with output ON	Connection A	R_{ON}	---	15 (27)	25 (50)
		Connection B		---	8 (20)	14 (43)
		Connection C		---	4 (10)	7 (---)
	Current leakage when the relay is open	I_{LEAK}	---	---	1.0	μA
Capacity between I/O terminals		C_{I-O}	---	0.8	---	pF
Insulation resistance		R_{I-O}	1,000	---	---	M Ω
Turn-ON time		t_{ON}	---	0.1 (0.25)	1.0 (0.5)	ms
Turn-OFF time		t_{OFF}	---	1.0 (0.5)	3.0 (1)	ms

Values in parentheses are for the G3VM-353B1/E1.

Recommended Operating Conditions


Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Output dielectric strength	V_{DD}	---	---	280	V
Operating LED forward current	I_F	5	---	25	mA
Continuous load current	I_O	---	---	150 (100)	mA
Operating temperature	T_a	-20	---	65	°C


Values in parentheses are for the G3VM-353B1/E1.

Engineering Data

Load Current vs. Ambient Temperature G3VM-353B(E)

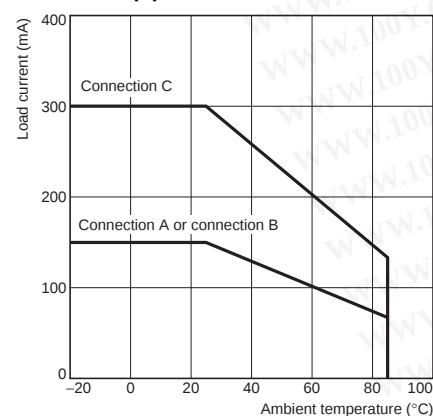


Load Current vs. Ambient Temperature G3VM-353B1/E1

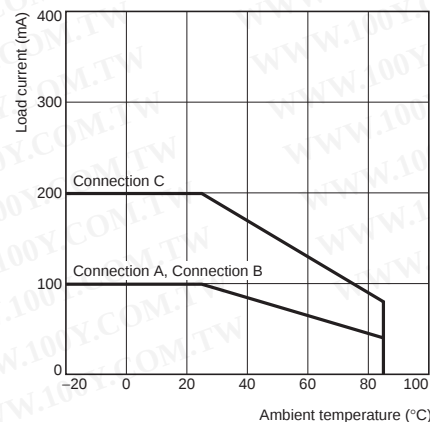


Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Connection Diagram

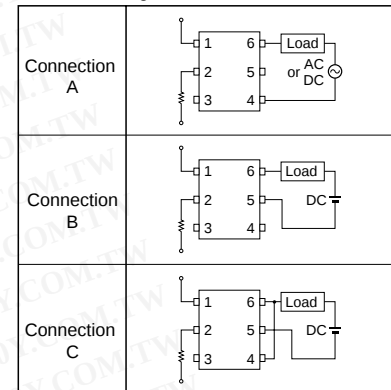

Note: 2. Turn-ON and Turn-OFF Times



Safety Precautions

Refer to "Common Precautions" for all G3VM models.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)