



TRI

MAIN FEATURES

- Miniature heavy-duty relays
- Single-Pole, 10 Amp PC Board
- SPST and SPDT configurations
- 5KV dielectric coil to contacts
- Sealed & Unsealed types available
- UL, cUL and TUV recognized.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



APPLICATIONS

- Microwave Ovens, Facsimiles, Refrigerators
- Air Conditioners, Stereo Equipment, Copier, TV Set, Vending Machines, Temperature Controllers, etc.


Option Socket :

Please refer appendix P102



- OD07-0017A
- OD07-0018A
- OD07-0019A
- OD07-0020A


ORDERING INFORMATION

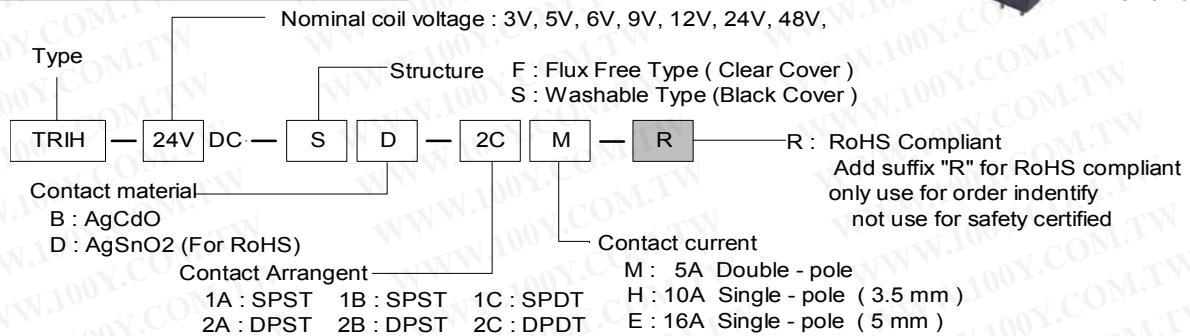



DIMENSION (unit:mm)

DRILLING (unit:mm)




WIRING DIAGRAM

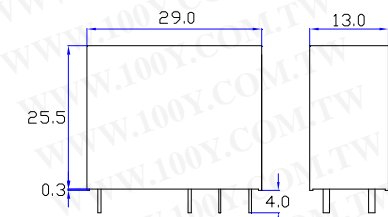



TRIH-1AE






TRIH-1CE

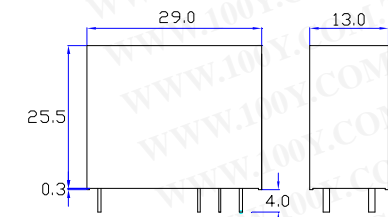



TRIH-1AH





TRIH-1CH

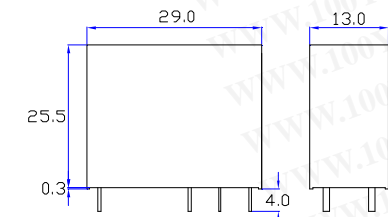

TRIH-2AM



TRIH-2CM



➤ **COIL DATA CHART(AT20°C)**

Nominal Voltage (VDC)	Nominal Current (mA ±10%)	Coil Resistance (Ω ±10%)	Power Consumption (mW)	Pick-Up Voltage VDC(Max.)	Drop-out Voltage VDC(Min.)	allowable Voltage VDC (Max.)
3	176	17	Approx. 530	80% Max.	10% Min. of nominal voltage	110% of nominal voltage
5	106	47				
6	88.2	68				
9	56.2	160				
12	43.6	275				
24	21.8	1100±15%				
48	11.5	4170±15%				

➤ **CONTACT RATING**




Arrangement	E-Type		H-Type		M-Type	
	SPST-NO. (1 Form A)	SPDT (1 Form C)	SPST-NO. (1 Form A)	SPDT (1 Form C)	DPST-NO. (2 Form A)	DPDT (2 Form C)
Resistive load (cosφ=1)	UL		10A 277VAC 10A 30VDC TV-5 125VAC 1/3HP 250VAC 1/4HP 125VAC		10A 250VAC 10A 30VDC TV-3 125VAC 1/4HP 240VAC 1/8HP 120VAC	
	TUV		10A 250VAC 10A 30VDC		5A 250VAC 5A 30VDC	
Carrying current	16A		10A		5A	
Max. switching voltage	277VAC, 30VDC		277VAC, 30VDC		250VAC, 30VDC	
Max. switching current	16A		10A		5A	
Max. switching power	4000VA 300W	2000VA 192W	2500VA 300W	1875VA 150W	1250VA 150W	500VA 90W
Min. permissible load	DC 5V 100mA			DC 5V 10mA		
Contact material	Ag Alloy					

➤ **PERFORMANCE (at initial value)**

Item	Type	TRI-H
Contact Resistance		50mΩ Max.
Operation time		15msec Max. (at nominal voltage)
Release time		10msec Max. (at nominal voltage)
Dielectric strength		between coil & contact. 5000VAC. for 1minute between contact sets. 3000VAC. for 1minute between open contacts. 1000VAC. for 1minute
Insulation Resistance		100MΩ Min. (at 500VDC)
Operating frequency		20 ops/minute
Ambient temperature		
Storage		-40°C to +70°C
Operating		-40°C to +70°C
Humidity		35% to 85% RH
Vibration resistance		10 to 55 Hz, 1.5mm double amplitude
Shock resistance		
Functional :		98m/s ²
Destructive :		980m/s ²
Life expectancy		
Mechanical :		1 x 10 ⁷ operations
Electrical :		1 x 10 ⁵ operations (at rated load)
Weight		Approx. 18grs.
UL & cUL		E156406
TUV		R50053235 / R50058882 / R50058874

➤ **REFERENCE DATA**

Maximum Switched Power

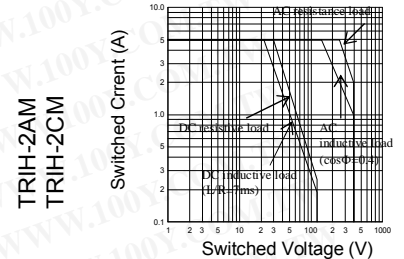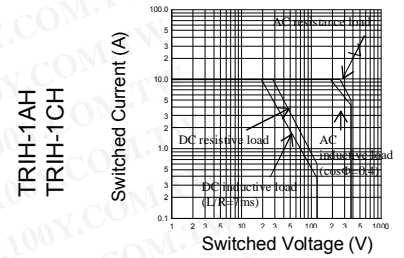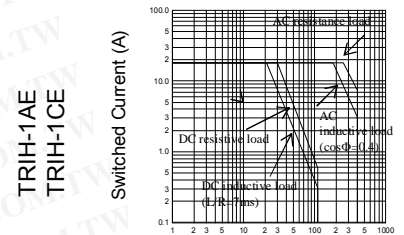

Electrical Life Expectancy

