



DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS

...designed for general-purpose amplifier and low-speed switching applications

FEATURES:

- * Collector-Emitter Sustaining Voltage-
 $V_{CE(SUS)} = 60 \text{ V (Min) - 2N6040, 2N6043}$
 $= 80 \text{ V (Min) - 2N6041, 2N6044}$
 $= 100 \text{ V (Min) - 2N6042, 2N6045}$
- * Collector-Emitter Saturation Voltage
 $V_{CE(sat)} = 2.0 \text{ V (Max.) @ } I_C = 4.0 \text{ A - 2N6040, 41, 2N6043, 44}$
 $= 2.0 \text{ V (Max.) @ } I_C = 4.0 \text{ A - 2N6042, 2N6045}$
- * Monolithic Construction with Built-in Base-Emitter Shunt Resistor


MAXIMUM RATINGS

Characteristic	Symbol	2N6040 2N6043	2N6041 2N6044	2N6042 2N6045	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	100	V
Collector-Base Voltage	V_{CBO}	60	80	100	V
Emitter-Base Voltage	V_{EBO}	5.0			V
Collector Current-Continuous -Peak	I_C I_{CM}	8.0 16			A
Base Current	I_B	120			mA
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	75 0.6			W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	- 65 to +150			$^\circ\text{C}$

THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.67	$^\circ\text{C/W}$

FIGURE -1 POWER DERATING

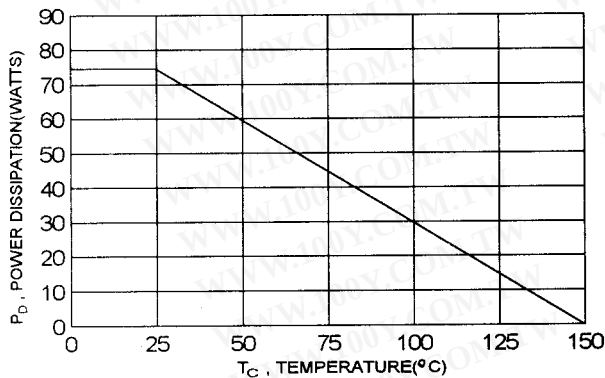


PNP	NPN
2N6040	2N6043
2N6041	2N6044
2N6042	2N6045

10 AMPERE
DARLINGTON
COMPLEMENTARY SILICON
POWER TRANSISTORS
60-100 VOLTS
80 WATTS



TO-220



PIN 1.BASE
2.COLLECTOR
3.EMITTER
4.COLLECTOR(CASE)

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.31
B	9.78	10.42
C	5.01	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	3.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.97
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90

2N6040, 2N6041, 2N6042 PNP / 2N6043, 2N6044, 2N6045 NPN

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector - Emitter Sustaining Voltage (1) ($I_c = 30\text{ mA}$, $I_B = 0$)	$V_{CE(sus)}$	60 80 100		V
Collector Cutoff Current ($V_{CE} = 30\text{ V}$, $I_B = 0$) ($V_{CE} = 40\text{ V}$, $I_B = 0$) ($V_{CE} = 50\text{ V}$, $I_B = 0$)	I_{CEO}		0.5 0.5 0.5	mA
Collector Cutoff Current ($V_{CB} = 60\text{ V}$, $I_E = 0$) ($V_{CB} = 80\text{ V}$, $I_E = 0$) ($V_{CB} = 100\text{ V}$, $I_E = 0$)	I_{CBO}		0.5 0.5 0.5	mA
Emitter Cutoff Current ($V_{EB} = 5.0\text{ V}$, $I_C = 0$)	I_{EBO}		2.0	mA


ON CHARACTERISTICS (1)

DC Current Gain ($I_c = 4.0\text{ A}$, $V_{CE} = 4.0\text{ V}$) ($I_c = 3.0\text{ A}$, $V_{CE} = 4.0\text{ V}$) ($I_c = 8.0\text{ A}$, $V_{CE} = 4.0\text{ V}$)	2N6040, 41/ 2N6043, 44 2N6042, 2N6045 All Types	hFE	1000 1000 100	20000 20000	
Collector-Emitter Saturation Voltage ($I_c = 4.0\text{ A}$, $I_B = 16\text{ mA}$) ($I_c = 3.0\text{ A}$, $I_B = 12\text{ mA}$) ($I_c = 8.0\text{ A}$, $I_B = 80\text{ mA}$)	2N6040, 41/ 2N6043, 44 2N6042, 2N6045 All Types	$V_{CE(sat)}$		2.0 2.0 4.0	V
Base-Emitter Saturation Voltage ($I_c = 8.0\text{ A}$, $I_B = 80\text{ mA}$)		$V_{BE(sat)}$		4.5	V
Base-Emitter On Voltage ($I_c = 4.0\text{ A}$, $V_{CE} = 4.0\text{ V}$)		$V_{BE(on)}$		2.8	V

DYNAMIC CHARACTERISTICS


Output Capacitance ($V_{CB} = 10\text{ V}$, $I_E = 1.0\text{ A}$, $f = 0.1\text{ MHz}$)	C_{ob}		300	pF
Small-Signal Current Gain ($I_c = 3.0\text{ A}$, $V_{CE} = 4.0\text{ V}$, $f = 1.0\text{ KHz}$)	h_{fe}	300		

(1) Pulse Test: Pulse width = 300 us , Duty Cycle $\leq 2.0\%$

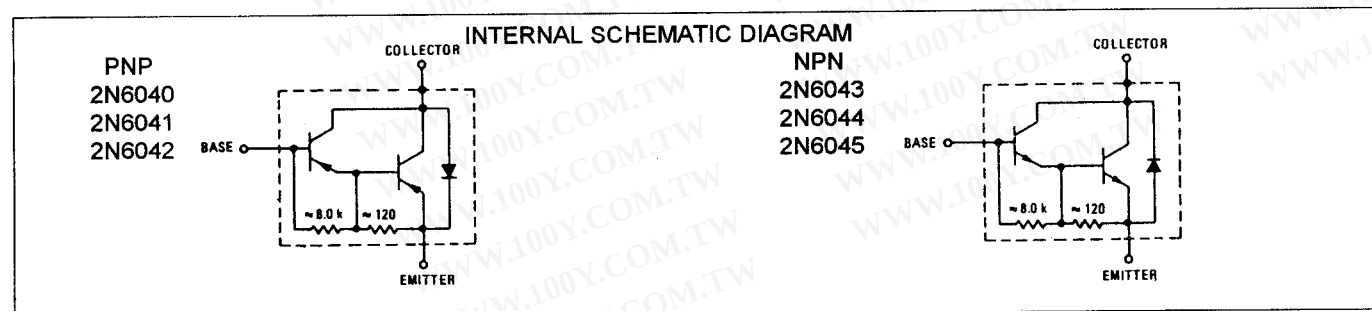


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


SWITCHING TIMES TEST CIRCUIT

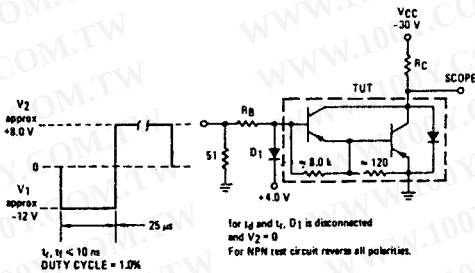


SWITCHING TIMES

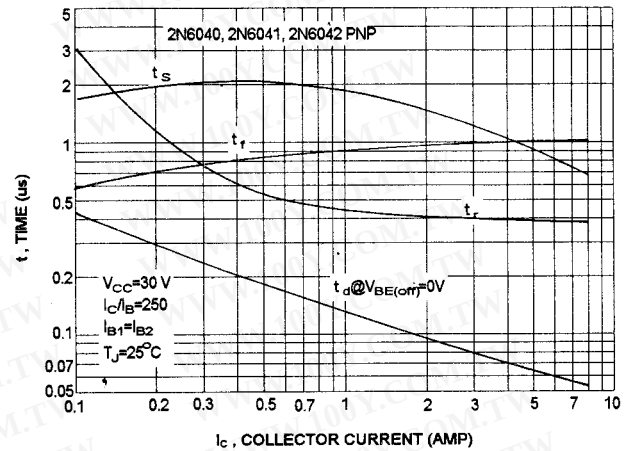


SWITCHING TIMES

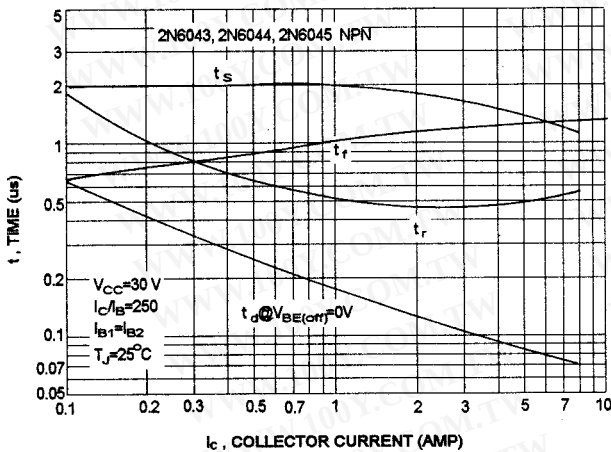

CAPACITANCES

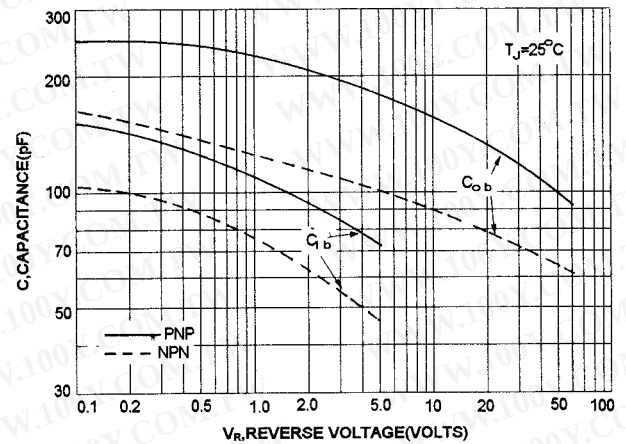

ACTIVE-REGION SAFE OPERATING AREA (SOA)

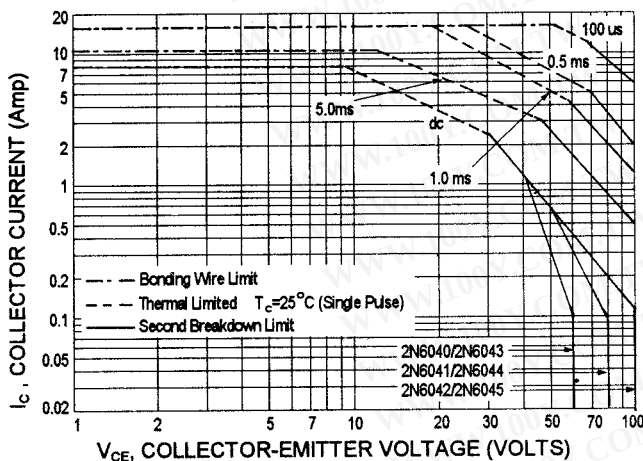


There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of SOA curve is base on $T_{J(PK)}=150^\circ\text{C}$; T_C is variable depending on conditions. second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(PK)}<150^\circ\text{C}$. At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

2N6040, 2N6041, 2N6042 PNP / 2N6043, 2N6044, 2N6045 NPN


PNP 2N6040, 2N6041, 2N6042

DC CURRENT GAIN

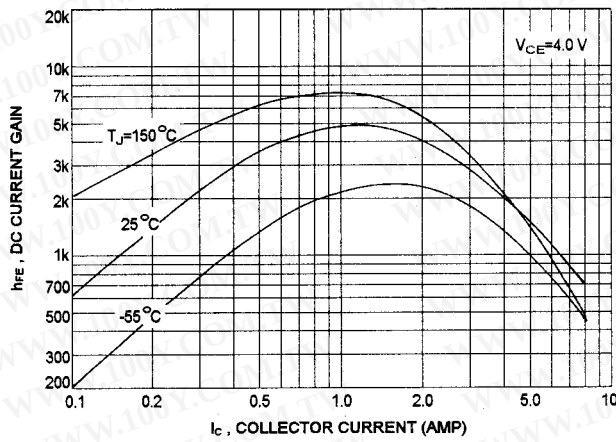


NPN 2N6043, 2N6044, 2N6045


DC CURRENT GAIN

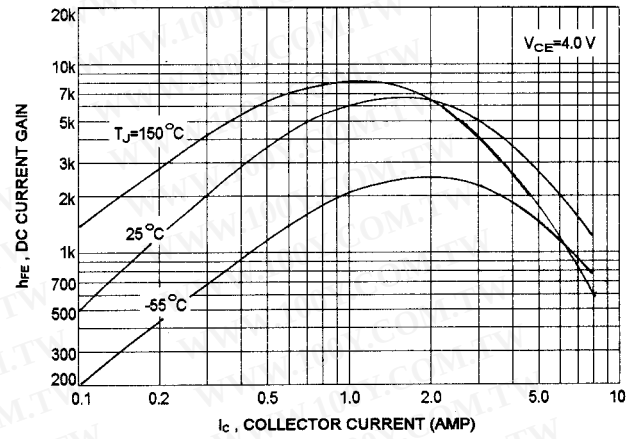


COLLECTOR SATURATION REGION

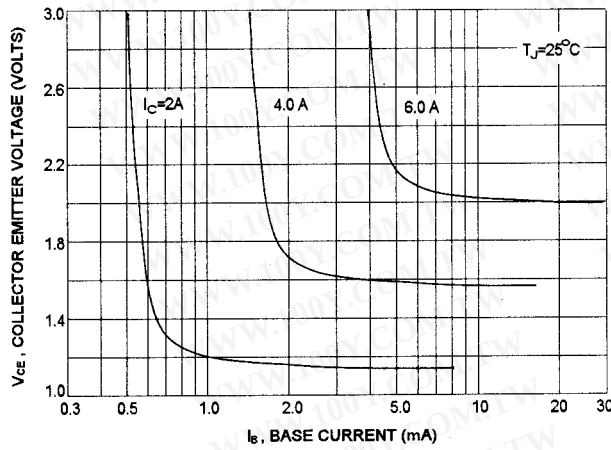

COLLECTOR SATURATION REGION

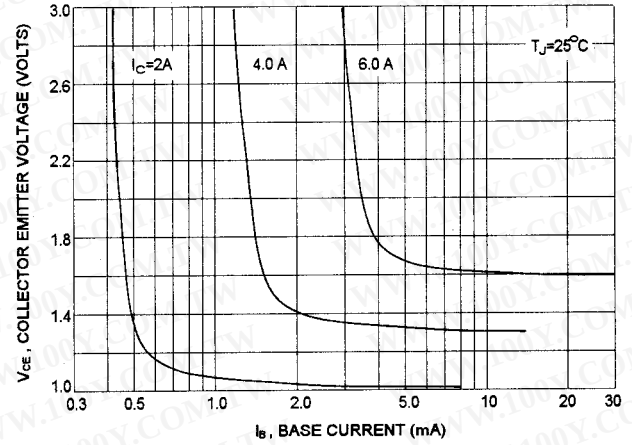

"ON" VOLTAGES

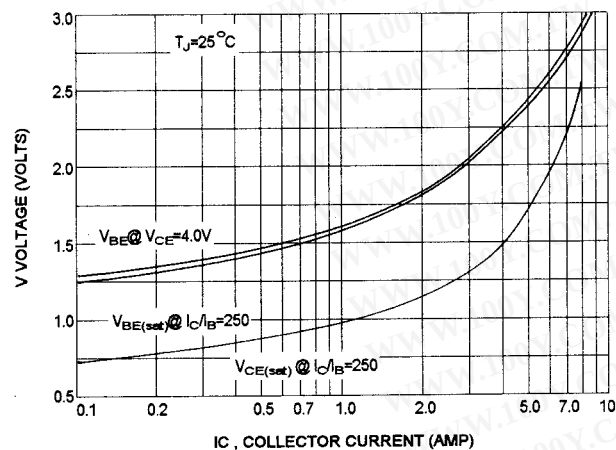

"ON" VOLTAGES

