


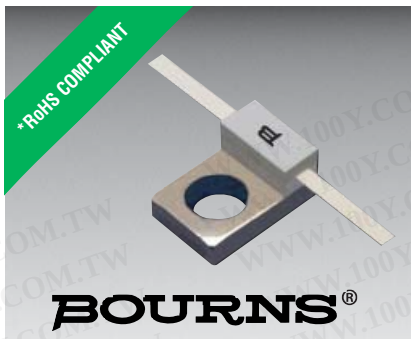

## Features

- DC to 2 GHz
- Flanged model
- Low VSWR

## Applications

- High power RF transmission

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# CHF3020CBF Series Power RF Terminations / Resistors

## General Specifications

Substrate..... Beo  
 Resistive Film..... Thick Film  
 Tab..... Ag  
 Cover Substrate..... AL203  
 Mounting Flange..... Cu plated with Ni  
 Resistance  
 Termination..... 50 ohms only  
 Resistor... See Resistance Value Table  
 Tolerance.....  $\pm 5\%$   
 Packaging..... 100 pcs./box

## Absolute Ratings

Power..... See Rated Power Table  
 Frequency..... 2.0 GHz  
 VSWR..... 1.30 Maximum  
 Capacitance..... 0.8 pF

## Resistance Value Table

| R Value (Ohms) | Code |
|----------------|------|
| 50             | 500  |
| 100            | 101  |
| 200            | 201  |
| 250            | 251  |
| 300            | 301  |

## Rated Power


| Version | Power (W) |
|---------|-----------|
| C       | 10        |
| D       | 25        |

## How to Order


CHF 3020 C B F 500 L

Model \_\_\_\_\_  
 Size \_\_\_\_\_  
 Version  
 C = 10 W  
 D = 25 W  
 Substrate \_\_\_\_\_  
 Mount  
 F = Flange  
 Value (see Resistance Value Table) \_\_\_\_\_  
 Function  
 L = Termination (50 ohms only)  
 R = Resistor

## Characteristic Curve

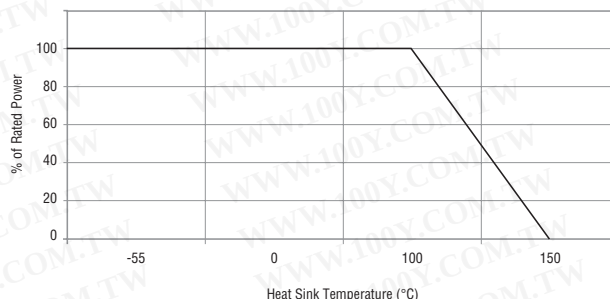


## Product Dimensions

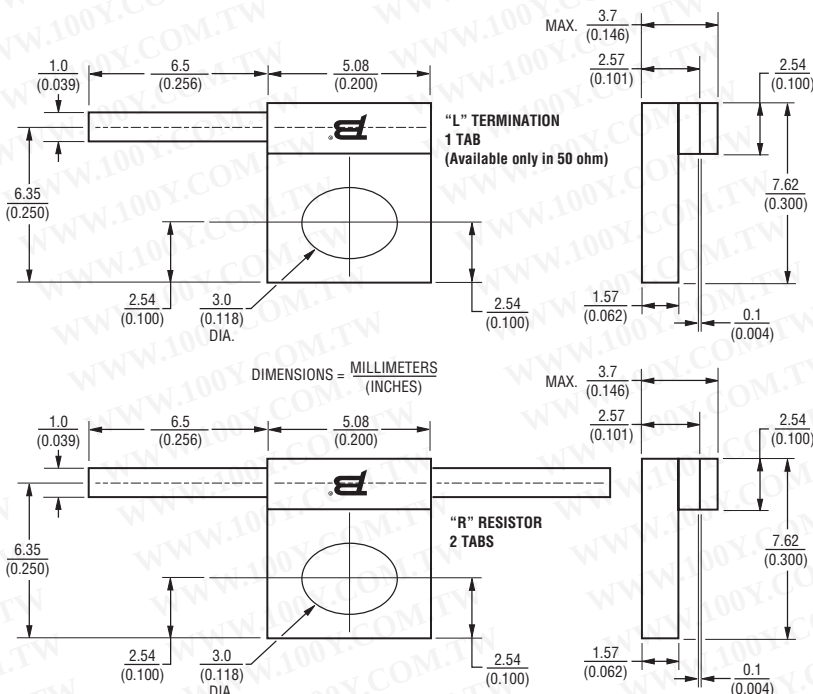

## Mounting High Power Devices

The mounting surface must be flat to less than 0.0254 mm (0.001 ") and devoid of scratches or burrs. The underside of the flange should be brushed with thermal grease prior to being fastened to the heat sink with mounting screws. The thermal grease will fill any air gaps and help to keep a good thermal contact.

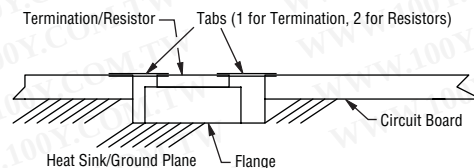

Pre-tin the tab prior to installation. Position the tab over the circuit and solder in place.

Ensure that the temperature on the surface of the flange does not exceed 110 °C when running at 100 % of load. If the temperature increases then derate the power.

REV. 09/09

\*RoHS Directive 2002/95/EC Jan 27 2003 including Annex.

Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications