


Lead (Pb)-bearing Thick Film, Rectangular High Value Chip Resistor



FEATURES

- High resistance values (up to 470M)
- Suitable for voltage dividers and hybrids
- SnPb contacts on Ni barrier layer
- Metal glaze on high quality ceramic
- Protective overglaze

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	SIZE		POWER RATING $P_{70^{\circ}\text{C}}$ W	LIMITING ELEMENT VOLTAGE MAX. V $\leq$	TEMP. COEFF. ppm/K	TOLERANCE %	RESISTANCE RANGE Ω	E-SERIES
	INCH	METRIC						
D11/CRCW0603-HR	0603	1608	0.10	75	± 500	± 5	11M - 470M	24
D12/CRCW0805-HR	0805	2012	0.125	150	± 500	± 5	11M - 470M	24
D25/CRCW1206-HR	1206	3216	0.25	200	± 500	± 5	11M - 470M	24

Notes

- These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime.
- Marking and packaging: See appropriate catalog or web pages
- Power rating depends on the max. temperature at the solder point, the component placement density and the substrate material

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	D11 CRCW0603-HR	D12 CRCW0805-HR	D25 CRCW1206-HR
Rated Dissipation at 70 °C ⁽²⁾	W	0.1	0.125	0.25
Limiting Element Voltage	V $\leq$	75	150	200
Voltage Coefficient	%/V	< 100M: < 0.1/> 100M: < 0.3		
Insulation Voltage (1 min)	V _{peak}	> 100	> 200	> 300
Thermal Resistance ⁽¹⁾	K/W	≤ 550	≤ 440	≤ 220
Insulation Resistance	Ω	> 10^9		
Category Temperature Range	°C	- 55 to + 155		
Weight/1000 pieces	g	2	5.5	10

Notes

⁽¹⁾ Measuring conditions in acc. to EN 140401-802

⁽²⁾ The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature of 155 °C is not exceeded.

PART NUMBER AND PRODUCT DESCRIPTION

PART NUMBER: CRCW060314M0JPTBHR ⁽³⁾

C R C W 0 6 0 3 1 4 M 0 J P T B H R

MODEL/SIZE
 CRCW0603
 CRCW0805
 CRCW1206

VALUE
 M = Million

TOLERANCE
 J = $\pm 5\%$

TCR
 P = ± 500 ppm/K

PACKAGING ⁽⁴⁾
 TA, TB
 TC, TI
 TL

SPECIAL
 up to 2 digits
 HR = High Value

Product Description: CRCW0603 146 J 500 RT5

CRCW0603

146

J

500

RT5

MODEL

RESISTANCE VALUE

TOLERANCE

TCR

PACKAGING ⁽⁴⁾

CRCW0603
 CRCW0805
 CRCW1206

686 = 68 M Ω
 227 = 220 M Ω

J = $\pm 5\%$

± 500 ppm/K

RT1, RT5
 RT6, RG1
 R20

$\pm 5\% = 2$ sig. digits plus multiplier


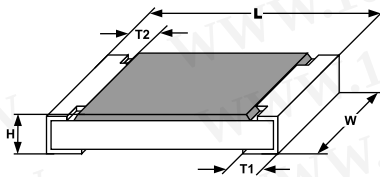
Notes

⁽³⁾ Preferred way for ordering products is by use of the PART NUMBER

⁽⁴⁾ Please refer to table PACKAGING, see next page

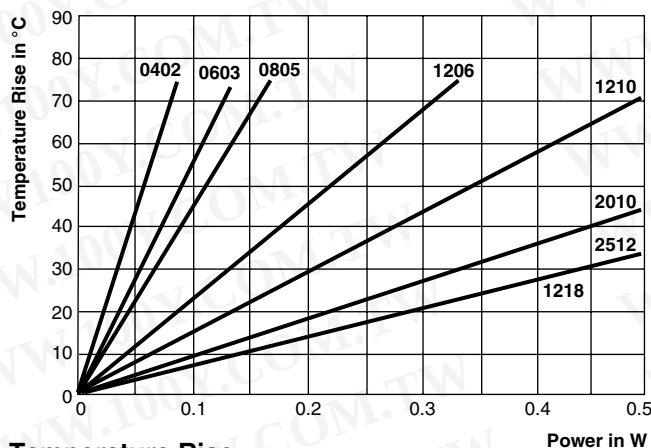
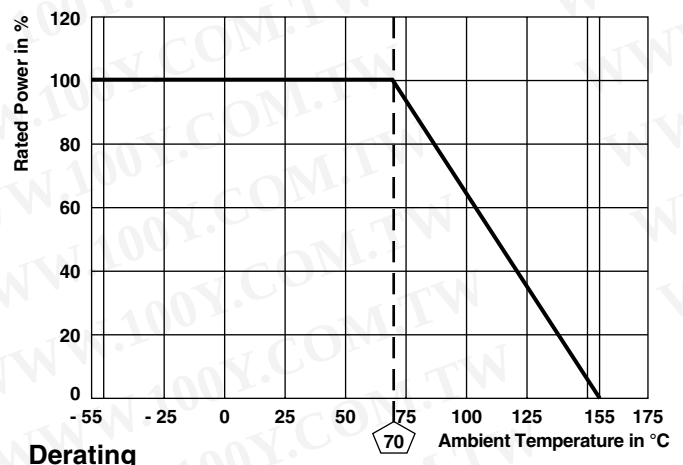
**PACKAGING**

MODEL	REEL							
	TAPE WIDTH	DIAMETER	PITCH	PIECES/REEL	PACKING CODE			
					PART NUMBER		PRODUCT DESC.	
					PAPER	BLISTER	PAPER	BLISTER
D11/CRCW0603-HR	8 mm	180 mm/7"	4 mm	5000	TA	TI	RT1	RG1
		285 mm/11.25"		10 000	TB		RT5	
		330 mm/13"		20 000	TC	TL	RT6	R20
D12/CRCW0805-HR	8 mm	180 mm/7"	4 mm	5000	TA	TI	RT1	RG1
		285 mm/11.25"		10 000	TB		RT5	
		330 mm/13"		20 000	TC	TL	RT6	R20
D25/CRCW1206-HR	8 mm	180 mm/7"	4 mm	5000	TA	TI	RT1	RG1
		285 mm/11.25"		10 000	TB		RT5	
		330 mm/13"		20 000	TC	TL	RT6	R20

DIMENSIONS

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SIZE		DIMENSIONS [in millimeters]					SOLDER PAD DIMENSIONS [in millimeters]					
							REFLOW SOLDERING			WAVE SOLDERING		
INCH	METRIC	L	W	H	T1	T2	a	b	l	a	b	l
0603	1608	$1.55^{+0.10}_{-0.05}$	0.85 ± 0.1	0.45 ± 0.05	0.3 ± 0.2	0.3 ± 0.2	0.5	0.9	1.0	0.9	0.9	1.0
0805	2012	$2.0^{+0.20}_{-0.10}$	1.25 ± 0.15	0.45 ± 0.05	$0.3^{+0.20}_{-0.10}$	0.3 ± 0.2	0.7	1.3	1.2	0.9	1.3	1.3
1206	3216	$3.2^{+0.10}_{-0.20}$	1.6 ± 0.15	0.55 ± 0.05	0.45 ± 0.2	0.4 ± 0.2	0.9	1.7	2.0	1.1	1.7	2.3

**Temperature Rise****Derating**

TEST PROCEDURES AND REQUIREMENTS

EN 60115-1

TEST (clause)	CONDITIONS OF TEST	REQUIREMENTS PERMISSIBLE CHANGE ($\Delta R/R$)
		STABILITY CLASS 2 OR BETTER
	Stability for product types: D../CRCW....-HR	11 M Ω to 470 M Ω
Resistance (4.5)	-	$\pm 5 \%$
Temperature coefficient (4.8.4.2)	20/- 55/20 °C and 20/125/20 °C	± 500 ppm/K
Overload (4.13)	$U = 2.5 \times (P_{70} \times R)^{1/2}$ $\leq 2 \times U_{\max.}$; Duration: according the style	$\pm (0.5 \% R + 0.05 \Omega)$
Solderability (4.17.5)	Aging 4 h at 155 °C, dryheat solder bath method; 235 °C; 2 s visual examination	Good tinning ($\geq 95 \%$ covered) no visible damage
Resistance to soldering heat (4.18.2)	Solder bath method; (260 $\pm$ 5) °C; (10 $\pm$ 1) s	$\pm (0.5 \% R + 0.05 \Omega)$
Rapid change of temperature (4.19)	30 min at LCT = - 55 °C; 30 min at UCT = 125 °C; 5 cycles	$\pm (0.5 \% R + 0.05 \Omega)$
Damp heat, steady state (4.24)	(40 $\pm$ 2) °C; 56 days; (93 $\pm$ 3) % RH	$\pm (2 \% R + 0.1 \Omega)$
Climatic sequence (4.23)	16 h at UCT = 125 °C; 1 cycle at 55 °C; 2 h at LCT = - 55 °C; 1 h/1 kPa at 15 °C to 35 °C; 5 cycles at 55 °C $U = (P_{70} \times R)^{1/2}$ $U = U_{\max.}$; whichever is less severe	$\pm (2 \% R + 0.1 \Omega)$
Endurance at 70 °C (4.25.1)	$U = (P_{70} \times R)^{1/2}$ $U = U_{\max.}$; whichever is less severe 1.5 h ON; 0.5 h OFF; 70 °C; 1000 h	$\pm (2 \% R + 0.1 \Omega)$
Extended endurance (4.25.1.8)	Duration extended to 8000 h	$\pm (4 \% R + 0.1 \Omega)$
Endurance at upper category temperature (4.25.3)	UCT = 125 °C; 1000 h	$\pm (2 \% R + 0.1 \Omega)$

APPLICABLE SPECIFICATIONS

- EN 60115-1 Generic Specifications
- EN 140400 Sectional Specification
- EN 140401-802 Detail Specifications
- IEC 60068-2-x Variety of environmental test procedures
- IEC 60286-3 Packaging of SMD components

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)