


SILICON PLANAR ZENER DIODES

The Zener voltages are graded according to the international E 24 standard. Other tolerances and higher Zener voltages are upon request.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

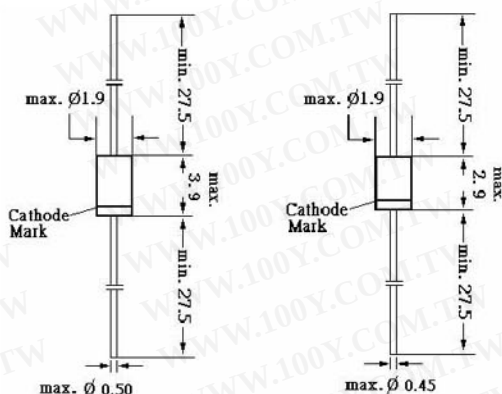

Glass case JEDEC DO-35

Dimensions in mm

Glass case JEDEC DO-34

Dimensions in mm

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)


	Symbol	Value	Unit
Zener Current see Table "Characteristics"			
Power Dissipation	P_{tot}	500 ¹⁾	mW
Junction Temperature	T_j	175	$^\circ\text{C}$
Storage Temperature Range	T_s	-55 to +175	$^\circ\text{C}$

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case

Characteristics at $T_{amb} = 25^\circ\text{C}$

	Symbol	Min.	Typ.	Max.	Unit
Thermal Resistance Junction to Ambient Air	R_{thA}	-	-	0.3 ¹⁾	K/mW
Forward Voltage at $I_F = 100\text{mA}$	V_F	-	-	1	V

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case




BZX55...

Type	Zener Voltage Range ¹⁾		Dynamic Resistance			Reverse Leakage Current			Temp. coefficient of Zener Voltage
	V _{znom} V	I _{ZT} for V _{ZT} ²⁾ mA	r _{ZT} Ω	r _{ZK} at I _{ZK} Ω	I _{ZK} mA	Ta = 25°C μA	Ta = 125°C μA	I _R at V _R V	
BZX 55/C 0V8 ³⁾	0.8	5	0.73...0.83	<8	<50	1	—	—	-0.26...-0.23
BZX 55/C 2V0	2.0	5	1.80...2.15	<85	<600	1	<100	<200	-0.09...-0.06
BZX 55/C 2V2	2.2	5	2.08...2.33	<85	<600	1	<75	<160	-0.09...-0.06
BZX 55/C 2V4	2.4	5	2.28...2.56	<85	<600	1	<50	<100	-0.09...-0.06
BZX 55/C 2V7	2.7	5	2.5...2.9	<85	<600	1	<10	<50	-0.09...-0.06
BZX 55/C 3V0	3.0	5	2.8...3.2	<85	<600	1	<4	<40	-0.08...-0.05
BZX 55/C 3V3	3.3	5	3.1...3.5	<85	<600	1	<2	<40	-0.08...-0.05
BZX 55/C 3V6	3.6	5	3.4...3.8	<85	<600	1	<2	<40	-0.08...-0.05
BZX 55/C 3V9	3.9	5	3.7...4.1	<85	<600	1	<2	<40	-0.08...-0.05
BZX 55/C 4V3	4.3	5	4.0...4.6	<75	<600	1	<1	<20	-0.06...-0.03
BZX 55/C 4V7	4.7	5	4.4...5.0	<60	<600	1	<0.5	<10	-0.05...+0.02
BZX 55/C 5V1	5.1	5	4.8...5.4	<35	<550	1	<0.1	<2	-0.02...+0.02
BZX 55/C 5V6	5.6	5	5.2...6.0	<25	<450	1	<0.1	<2	-0.05...+0.05
BZX 55/C 6V2	6.2	5	5.8...6.6	<10	<200	1	<0.1	<2	0.03...0.06
BZX 55/C 6V8	6.8	5	6.4...7.2	<8	<150	1	<0.1	<2	0.03...0.07
BZX 55/C 7V5	7.5	5	7.0...7.9	<7	<50	1	<0.1	<2	0.03...0.07
BZX 55/C 8V2	8.2	5	7.7...8.7	<7	<50	1	<0.1	<2	0.03...0.08
BZX 55/C 9V1	9.1	5	8.5...9.6	<10	<50	1	<0.1	<2	0.03...0.09
BZX 55/C 10	10	5	9.4...10.6	<15	<70	1	<0.1	<2	0.03...0.1
BZX 55/C 11	11	5	10.4...11.6	<20	<70	1	<0.1	<2	0.03...0.11
BZX 55/C 12	12	5	11.4...12.7	<20	<90	1	<0.1	<2	0.03...0.11
BZX 55/C 13	13	5	12.4...14.1	<26	<110	1	<0.1	<2	0.03...0.11
BZX 55/C 15	15	5	13.8...15.6	<30	<110	1	<0.1	<2	0.03...0.11
BZX 55/C 16	16	5	15.3...17.1	<40	<170	1	<0.1	<2	0.03...0.11
BZX 55/C 18	18	5	16.8...19.1	<50	<170	1	<0.1	<2	0.03...0.11
BZX 55/C 20	20	5	18.8...21.2	<55	<220	1	<0.1	<2	0.03...0.11
BZX 55/C 22	22	5	20.8...23.3	<55	<220	1	<0.1	<2	0.04...0.12
BZX 55/C 24	24	5	22.8...25.6	<80	<220	1	<0.1	<2	0.04...0.12
BZX 55/C 27	27	5	25.1...28.9	<80	<220	1	<0.1	<2	0.04...0.12
BZX 55/C 30	30	5	28...32	<80	<220	1	<0.1	<2	0.04...0.12
BZX 55/C 33	33	5	31...35	<80	<220	1	<0.1	<2	0.04...0.12
BZX 55/C 36	36	5	34...38	<80	<220	1	<0.1	<2	0.04...0.12
BZX 55/C 39	39	2.5	37...41	<90	<500	0.5	<0.1	<5	0.04...0.12
BZX 55/C 43	43	2.5	40...46	<90	<500	0.5	<0.1	<5	0.04...0.12
BZX 55/C 47	47	2.5	44...50	<110	<600	0.5	<0.1	<5	0.04...0.12
BZX 55/C 51	51	2.5	48...54	<125	<700	0.5	<0.1	<10	0.04...0.12
BZX 55/C 56	56	2.5	52...60	<135	<700	0.5	<0.1	<10	0.04...0.12
BZX 55/C 62	62	2.5	58...66	<150	<1000	0.5	<0.1	<10	0.04...0.12
BZX 55/C 68	68	2.5	64...72	<200	<1000	0.5	<0.1	<10	0.04...0.12
BZX 55/C 75	75	2.5	70...79	<250	<1000	0.5	<0.1	<10	0.04...0.12
BZX 55/C 82	82	2.5	77...87	<300	<1500	0.25	<0.1	<10	0.05...0.12
BZX 55/C 91	91	1	85...96	<450	<2000	0.1	<0.1	<10	0.05...0.12
BZX 55/C 100	100	1	94...106	<450	<5000	0.1	<0.1	<10	0.05...0.12
BZX 55/C 110	110	1	104...116	<600	<5000	0.1	<0.1	<10	0.05...0.12
BZX 55/C 120	120	1	114...127	<800	<5500	0.1	<0.1	<10	0.05...0.12
BZX 55/C 130	130	1	124...141	<950	<6000	0.1	<0.1	<10	0.05...0.12
BZX 55/C 150	150	1	138...156	<1250	<6500	0.1	<0.1	<10	0.05...0.12
BZX 55/C 160	160	1	153...171	<1400	<7000	0.1	<0.1	<10	0.05...0.12
BZX 55/C 180	180	1	168...191	<1700	<8500	0.1	<0.1	<10	0.05...0.12
BZX 55/C 200	200	1	188...212	<2000	<10000	0.1	<0.1	<10	0.05...0.12

1) Tested with pulses $t_p = 20$ ms.

2) Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.

3) The BZX55-C0V8 is a silicon diode with operation in forward direction. Hence, the index of all parameters should be "F" instead of "Z". Connect the cathode lead to the negative pole.




勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)





ISO 9001:2000
 Certificate No. 05103
 ISO 14001:2004
 Certificate No. 7115
 ISO 9001:2000
 Certificate No. 050006

Dated: 11/07/2003


Breakdown characteristics
 $T_J = \text{constant (pulsed)}$

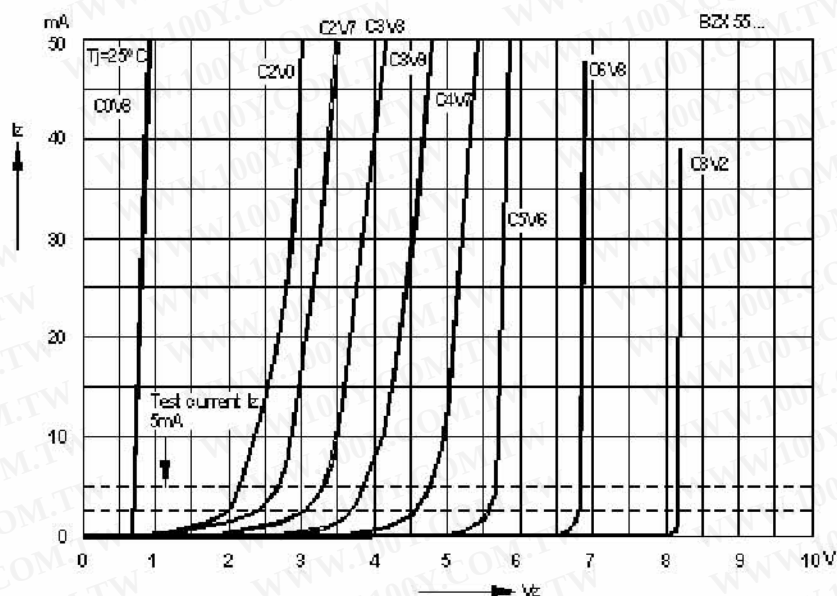

Breakdown characteristics
 $T_J = \text{constant (pulsed)}$

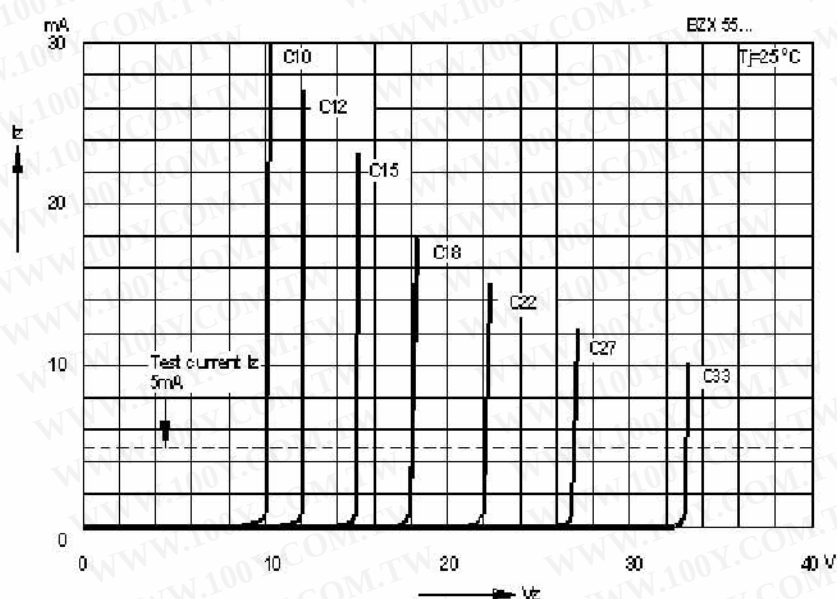

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



ISO/TS 16949:2002
 Certificate No. 05103

ISO 14001:2004
 Certificate No. 7116

ISO 9001:2000
 Certificate No. 050608

Dated : 11/07/2003