

# 2MBI300N-060

IGBT Module

600V / 300A 2 in one-package

## ■ Features

- High speed switching
- Voltage drive
- Low inductance module structure

## ■ Applications

- Inverter for Motor drive
- AC and DC Servo drive amplifier
- Uninterruptible power supply
- Industrial machines, such as Welding machines

## ■ Maximum ratings and characteristics

### ● Absolute maximum ratings (at Tc=25°C unless otherwise specified)

Item	Symbol	Rating	Unit
Collector-Emitter voltage	V <sub>CEs</sub>	600	V
Gate-Emitter voltage	V <sub>GES</sub>	±20	V
Collector current	Continuous	I <sub>c</sub>	300 A
	1ms	I <sub>c</sub> pulse	600 A
	Continuous	-I <sub>c</sub>	300 A
	1ms	-I <sub>c</sub> pulse	600 A
Max. power dissipation	P <sub>c</sub>	1100	W
Operating temperature	T <sub>j</sub>	+150	°C
Storage temperature	T <sub>stg</sub>	-40 to +125	°C
Isolation voltage	V <sub>is</sub>	AC 2500 (1min.)	V
Screw torque	Mounting *1	3.5	N·m
	Terminals *1	3.5	N·m

\*1 : Recommendable value : 2.5 to 3.5 N·m(M5)

### ● Electrical characteristics (at Tj=25°C unless otherwise specified)

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Zero gate voltage collector current	I <sub>CEs</sub>	-	-	2.0	V <sub>GE</sub> =0V, V <sub>CE</sub> =600V	mA
Gate-Emitter leakage current	I <sub>GES</sub>	-	-	30	V <sub>CE</sub> =0V, V <sub>GE</sub> =±20V	μA
Gate-Emitter threshold voltage	V <sub>GE(th)</sub>	4.5	-	7.5	V <sub>CE</sub> =20V, I <sub>c</sub> =300mA	V
Collector-Emitter saturation voltage	V <sub>CE(sat)</sub>	-	-	2.8	V <sub>GE</sub> =15V, I <sub>c</sub> =300A	V
Input capacitance	C <sub>ies</sub>	-	19800	-	V <sub>GE</sub> =0V	pF
Output capacitance	C <sub>oes</sub>	-	4400	-	V <sub>CE</sub> =10V	
Reverse transfer capacitance	C <sub>res</sub>	-	2000	-	f=1MHz	
Turn-on time	t <sub>on</sub>	-	0.6	1.2	V <sub>CC</sub> =300V	μs
	t <sub>r</sub>	-	0.2	0.6	I <sub>c</sub> =300A	
Turn-off time	t <sub>off</sub>	-	0.6	1.0	V <sub>GE</sub> =±15V	μs
	t <sub>f</sub>	-	0.2	0.35	R <sub>G</sub> =6.8 ohm	
Diode forward on voltage	V <sub>F</sub>	-	-	3.0	I <sub>F</sub> =300A, V <sub>GE</sub> =0V	V
Reverse recovery time	t <sub>rr</sub>	-	-	0.3	I <sub>F</sub> =300A	μs

### ● Thermal resistance characteristics


Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Thermal resistance	R <sub>th(j-c)</sub>	-	-	0.11	IGBT	°C/W
	R <sub>th(j-c)</sub>	-	-	0.24	Diode	°C/W
	R <sub>th(c-f)*2</sub>	-	0.025	-	the base to cooling fin	°C/W

\*2 : This is the value which is defined mounting on the additional cooling fin with thermal compound




勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## ■ Equivalent Circuit Schematic

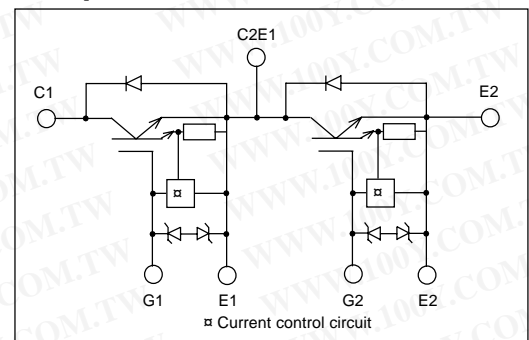


Characteristics (Representative)


Collector current vs. Collector-Emittor voltage  
T<sub>J</sub>=25°C

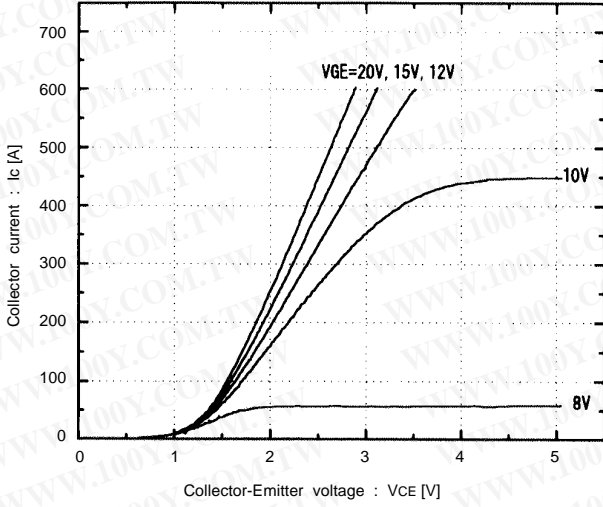


Collector current vs. Collector-Emittor voltage  
T<sub>J</sub>=125°C

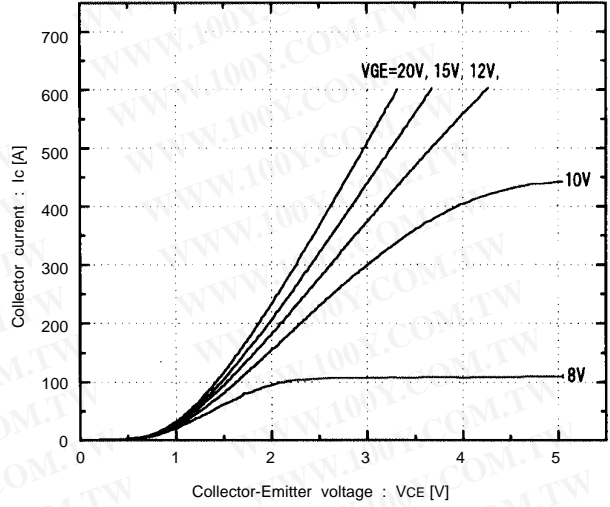


Collector-Emittor vs. Gate-Emittor voltage  
T<sub>J</sub>=25°C

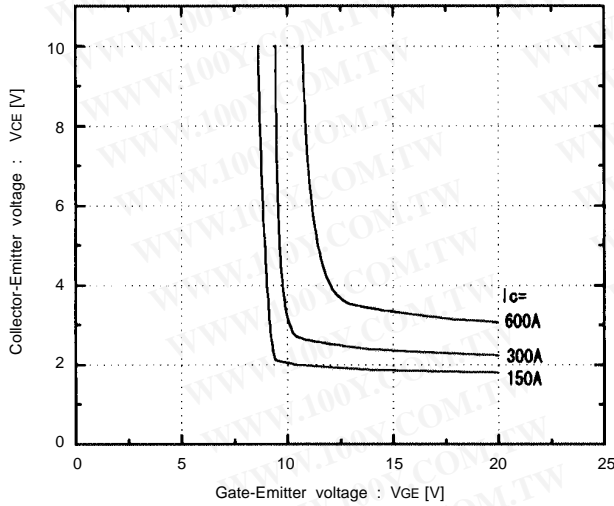


Collector-Emittor vs. Gate-Emittor voltage  
T<sub>J</sub>=125°C

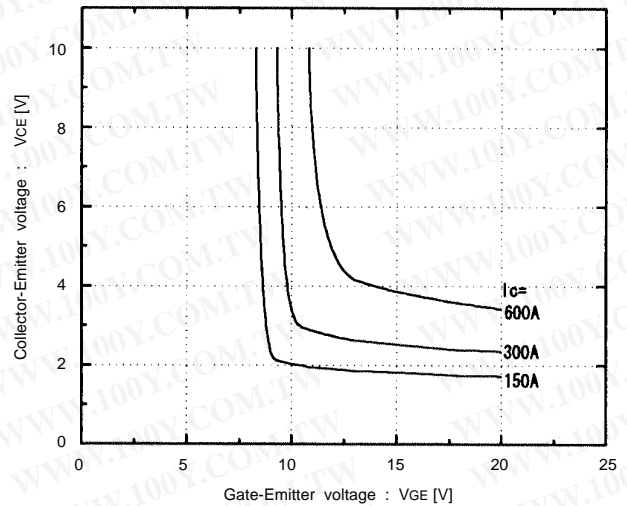


Switching time vs. Collector current  
V<sub>CC</sub>=300V, R<sub>G</sub>=6.8 ohm, V<sub>GE</sub>=±15V, T<sub>J</sub>=25°C

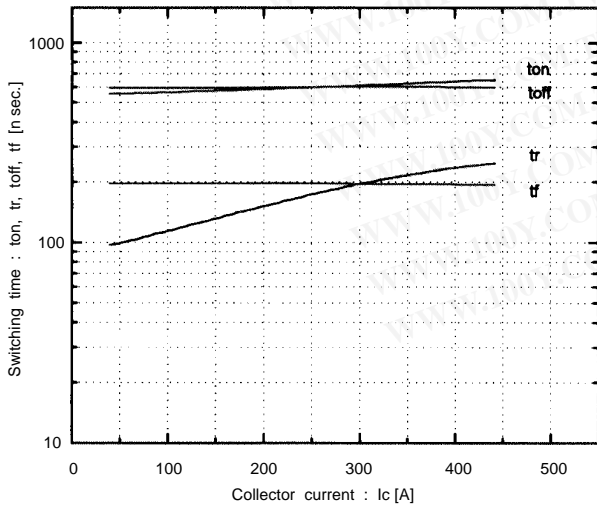


Switching time vs. Collector current  
V<sub>CC</sub>=300V, R<sub>G</sub>=6.8 ohm, V<sub>GE</sub>=±15V, T<sub>J</sub>=125°C

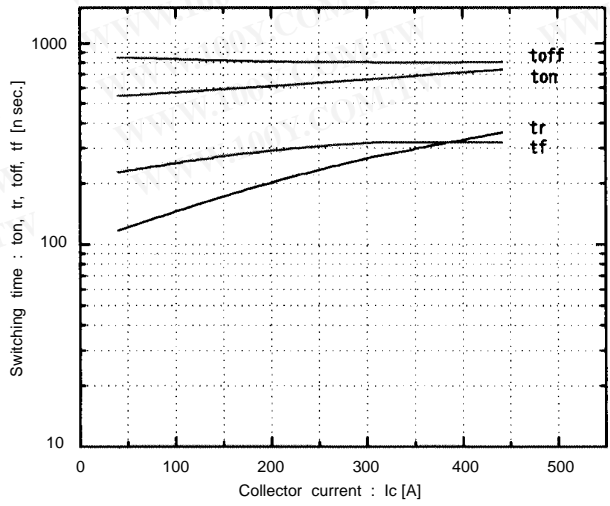


Switching time vs. RG  
 $V_{cc}=300V, I_c=300A, V_{GE}=\pm 15V, T_j=25^\circ C$

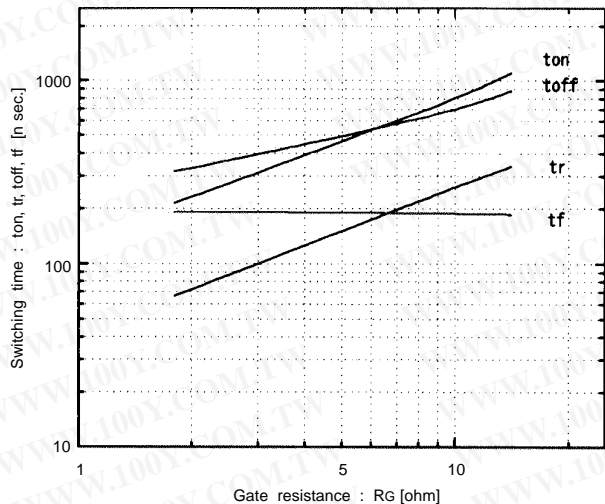


Dynamic input characteristics  
 $T_j=25^\circ C$

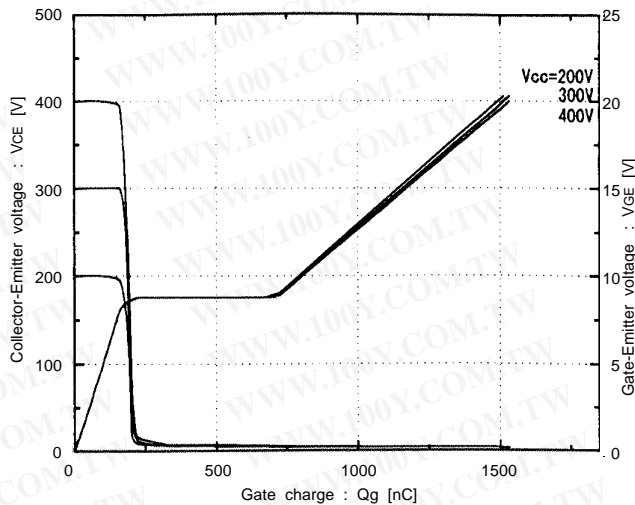


Forward current vs. Forward voltage  
 $V_{GE}=0V$

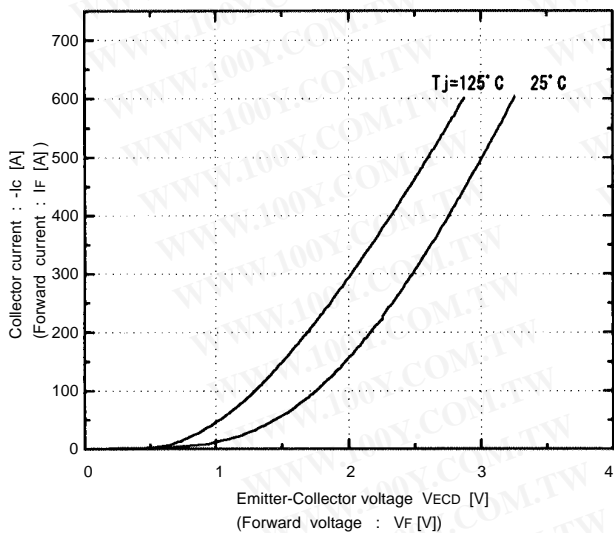


Reverse recovery characteristics  
 $t_{rr}, I_{rr}$ , vs.  $I_F$

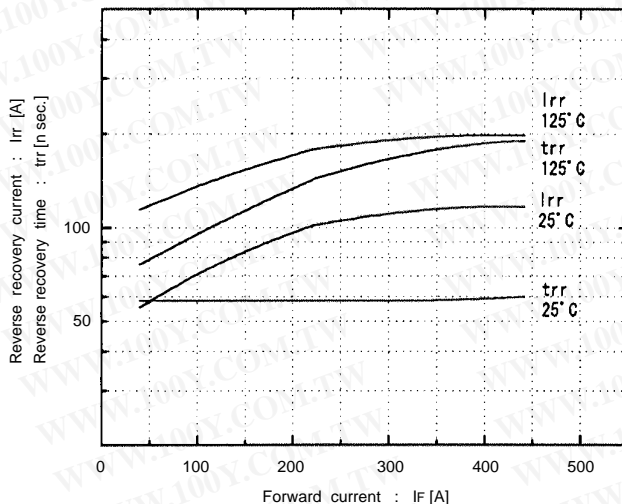


Switching loss vs. Collector current  
 $V_{cc}=300V, R_G=6.8\text{ ohm}, V_{GE}=\pm 15V$

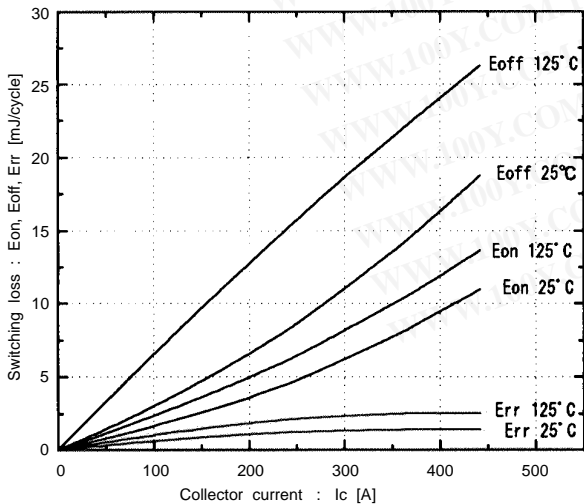


Reversed biased safe operating area  
 $+V_{GE}=15V, -V_{GE} \le 15V, T_j \le 125^\circ C, R_G \ge 6.8\text{ ohm}$

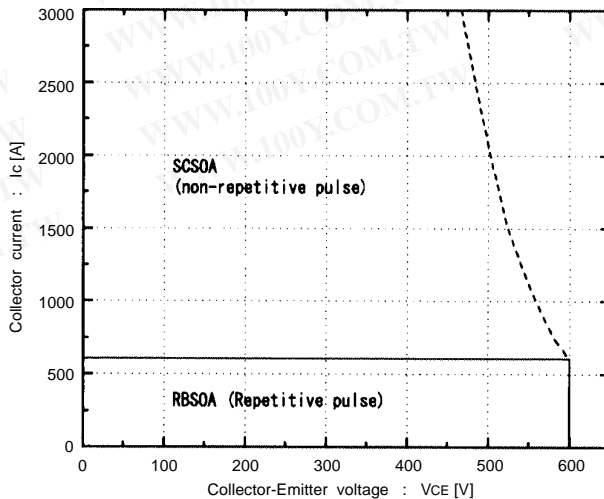

Transient thermal resistance

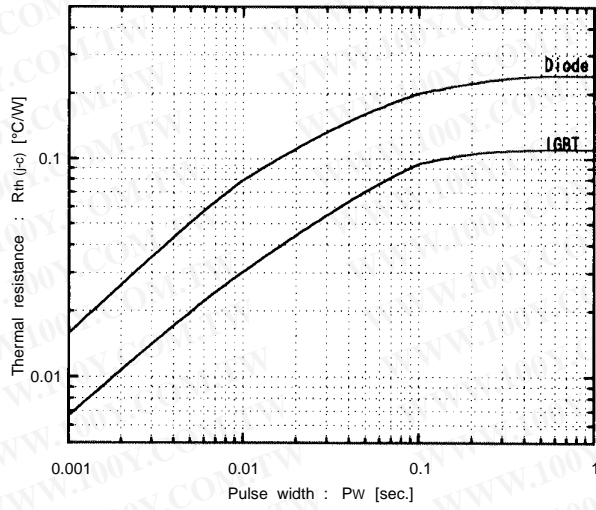

Capacitance vs. Collector-Emitter voltage  
T<sub>J</sub>=25°C

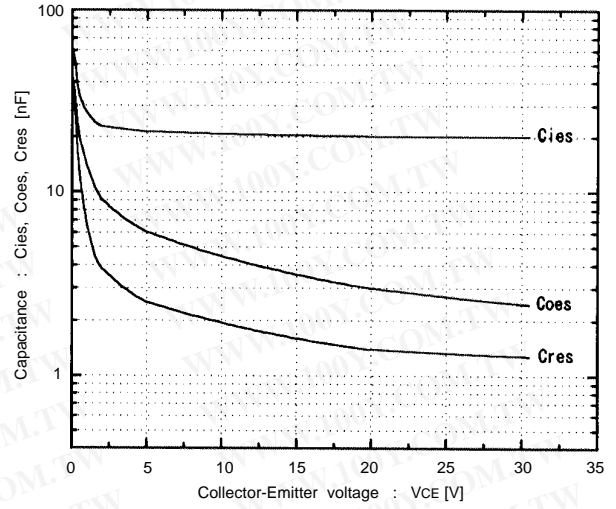

勝特力材料 886-3-5753170  
 勝特力電子(上海) 86-21-34970699  
 勝特力電子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

■ Outline Drawings, mm

